
pysb Documentation

Release 1.16.0+0.gb053005.dirty

Jeremy Muhlich

Feb 23, 2024

CONTENTS

1	Installation	3
1.1	Option 1: Install PySB natively on your computer	3
1.1.1	Recommended additional software	4
1.2	Option 2: Docker container with PySB and Jupyter Notebook	5
1.2.1	Background	5
1.2.2	Install Docker and the PySB software stack	5
1.2.3	Important notes for Docker installations	5
2	Tutorial	7
2.1	Introduction	7
2.2	First steps	7
2.3	Creating a model	7
2.4	Using a model	8
2.5	Model creation in depth	8
2.5.1	Component	9
2.5.2	Monomer	9
2.5.3	Parameter	10
2.5.4	Rules	11
2.5.5	Observables	13
2.6	Initial conditions	14
2.7	Simulation and analysis	14
2.8	Visualization	18
2.9	Higher-order rules	19
2.10	Using provided macros	21
2.11	Compartments	25
2.12	Model calibration	25
2.13	Modules	25
2.14	Miscellaneous	25
2.14.1	Self-export	25
3	Frequently Asked Questions	27
3.1	General	27
3.2	Rule and Reaction Rate Laws	27
3.3	Simulation	28
4	PySB Modules Reference	29
4.1	PySB core (<code>pysb.core</code>)	29
4.2	ODE integrators (<code>pysb.integrate</code>)	44
4.3	Simulation tools (<code>pysb.simulator</code>)	47
4.4	Set/get paths for external tools (<code>pysb.pathfinder</code>)	63

4.5	Testing PySB Models (<code>pysb.testing.modeltests</code>)	64
4.6	BioNetGen integration (<code>pysb.bng</code>)	66
4.7	Kappa integration (<code>pysb.kappa</code>)	70
4.8	Macros (<code>pysb.macros</code>)	74
4.9	Pattern matching against PySB models (<code>pysb.pattern</code>)	97
4.10	Visualizing model structure	105
4.10.1	Render a model’s reaction network (<code>pysb.tools.render_reactions</code>)	105
4.10.2	Render a model’s species (<code>pysb.tools.render_species</code>)	106
4.11	Sensitivity analysis (<code>pysb.tools.sensitivity_analysis</code>)	107
4.12	Importing from other formats (<code>pysb.importers</code>)	112
4.13	Exporting to other formats (<code>pysb.export</code>)	115
4.13.1	Command-line usage	116
4.13.2	Interactive usage	116
4.13.3	Implementation of specific exporters	117
5	Useful References	131
5.1	Python Language	131
5.2	NumPy and SciPy	131
5.3	BioNetGen	132
6	Indices and tables	133
	Python Module Index	135
	Index	137

PySB is a framework for building mathematical rule-based models of biochemical systems as Python programs. PySB abstracts the complex process of creating equations describing interactions among multiple proteins (or other biomolecules) into a simple and intuitive domain specific language embedded within Python. PySB accomplishes this by automatically generating sets of [BNGL](#) or [Kappa](#) rules and using the rules for simulation or analysis. PySB makes it straightforward to divide models into modules and to call libraries of reusable elements (macros) that encode standard biochemical actions. These features promote model transparency, reuse and accuracy. PySB interoperates with standard scientific Python libraries such as [NumPy](#), [SciPy](#) and [SymPy](#) to enable model simulation and analysis.

Contents:

INSTALLATION

There are two different ways to install and use PySB:

1. **Install PySB natively on your computer (recommended).**

OR

2. **Download a Docker container with PySB and Jupyter Notebook.** If you are familiar with [Docker](#), PySB can be installed from the Docker Hub by typing **docker pull pysb/pysb**. Further details are below.

Note: Need Help? If you run into any problems with installation, please visit our chat room: <https://gitter.im/pysb/pysb>

1.1 Option 1: Install PySB natively on your computer

1. **Install Anaconda**

Our recommended approach is to use [Anaconda](#), which is a distribution of Python containing most of the numeric and scientific software needed to get started. If you are a Mac or Linux user, have used Python before and are comfortable using `pip` to install software, you may want to skip this step and use your existing Python installation.

Anaconda has a simple graphical installer which can be downloaded from <https://www.anaconda.com/products/individual> - select your operating system and download the 64 bit version. From PySB 2.0, we only support Python 3.x (see the [Frequently Asked Questions](#) for specific version support). The default installer options are usually appropriate.

2. **Install PySB**

The installation is very straightforward with `conda` - type the following in a terminal:

```
conda install -c alubbock pysb
```

Note: You may wish to use the Anaconda prompt, which sets up the Anaconda paths automatically, rather than the standard command prompt or terminal on your operating system. Otherwise, you may have to use the full path to the `conda` command each time, and may end up using the system version of Python, rather than the Anaconda one.

Note: You can also install PySB using `pip`, but in that case you will need to manually install [BioNetGen](#) into the default path for your platform (`/usr/local/share/BioNetGen` on Mac and Linux, `c:\Program Files\BioNetGen` on Windows), or set the `BNGPATH` environment variable to the BioNetGen path on your machine.

3. Start Python and PySB

If you installed Python using [Anaconda](#) on Windows, search for and select IPython from your Start Menu (Windows). Otherwise, open a terminal and type `python` to get started (or `ipython`, if installed).

You will then be at the Python prompt. Type `import pysb` to try loading PySB. If no error messages appear and the next Python prompt appears, you have succeeded in installing PySB! You can now proceed to the [Tutorial](#).

1.1.1 Recommended additional software

The following software is not required for the basic operation of PySB, but provides extra capabilities and features when installed.

- [cython](#) Cython is a package for compiling Python code into C code on the fly. It is used by [pysb.simulator.ScipyOdeSimulator](#) to greatly improve the speed of ODE integration. PySB will detect and use Cython automatically, if available. To install with Anaconda, type `conda install cython`. With pip, type `pip install cython`.

- [matplotlib](#)

This Python package allows you to plot the results of your simulations. It is not a hard requirement of PySB but many of the example scripts use it. [matplotlib](#) is included with [Anaconda](#). Otherwise, it can be installed with `pip install matplotlib`.

- [pandas](#)

This Python package provides extra capabilities for examining large numerical datasets, with statistical summaries and database-like manipulation capabilities. It is not a hard requirement of PySB, but it is a useful addition, particularly with large sets of simulation results. [pandas](#) is included with [Anaconda](#). Otherwise, it can be installed with `pip install pandas`.

- [IPython](#)

An alternate interactive Python shell, much improved over the standard one. [IPython](#) is included with [Anaconda](#). Otherwise, it can be installed with `pip install ipython`.

- [Kappa 4.0](#)

Kappa is a rule-based modeling tool that can produce several useful model visualizations or perform an agent-based model simulation. PySB optionally interfaces with its *KaSim* simulator and *KaSa* static analyzer.

To install Kappa for PySB use, put the *KaSim* executable (and optionally *KaSa* if you have it) in `/usr/local/share/KaSim` (Mac or Linux) or `C:\Program Files\KaSim` (Windows). If you would like to put it somewhere else, set the `KAPPAPATH` environment variable to the full path to the folder containing the *KaSim* and *KaSa* executables. Note that if you have downloaded the official binary build of *KaSim*, it will be named something like `KaSim_4.0_winxp.exe` or `KaSim_4.0_mac OSX_10.10`. Regardless of where you install it, you will need to rename the file to strip out the version and operating system information so that you have just `KaSim.exe` (Windows) or `KaSim` (Mac or Linux).

On Anaconda, Kappa can be installed with `conda install -c alubbock kappa`.

1.2 Option 2: Docker container with PySB and Jupyter Notebook

1.2.1 Background

Docker is a virtualization platform which encapsulates software within a container. It can be thought of like a virtual machine, only it contains just the application software (and supporting dependencies) and not a full operating system stack.

1.2.2 Install Docker and the PySB software stack

1. Install Docker

To use PySB with Docker, first you'll need to install Docker, which can be obtained from <https://www.docker.com/community-edition#/download> (Windows and Mac). Linux users should use their package manager (e.g. `apt-get`).

2. Download the PySB software stack from the Docker Hub

On the command line, this requires a single command:

```
docker pull pysb/pysb
```

This only needs to be done once, or when software updates are required.

3. Start the container

Start the Docker container with the following command (on Linux, the command may need to be prefixed with `sudo`):

```
docker run -it --rm -p 8888:8888 pysb/pysb
```

This starts the PySB Docker container with Jupyter notebook and connects it to port 8888.

4. Open Jupyter Notebook in a web browser

Open a web browser of your choice and enter the address <http://localhost:8888> in the address bar. You should see a web page with the Jupyter notebook logo. Several example and tutorial notebooks are included to get you started.

1.2.3 Important notes for Docker installations

To see graphics from matplotlib within the Jupyter Notebook, you'll need to set the following option in your notebooks before calling any plot commands:

```
%matplotlib inline
```

Any Jupyter notebooks created will be saved in the container itself, rather than on the host computer. Notebooks can be downloaded using the Jupyter interface, or a directory on the host computer can be shared with the container.

The PySB container builds on the Jupyter SciPy notebook, which contains further information on the options available for the container (such as sharing a directory with the host computer to preserve notebooks, setting a password and more). Documentation from the Jupyter project is available at <https://hub.docker.com/r/jupyter/scipy-notebook/>

2.1 Introduction

This tutorial will walk you through the creation and simulation of a PySB model.

2.2 First steps

Once you have installed PySB, run the following commands from a Python interpreter to check that the basic functionality is working. This will define a model that synthesizes a molecule “A” at the rate of 3 copies per second, simulates that model from t=0 to 60 seconds and displays the amount of A sampled at intervals of 10 seconds:

```
>>> from pysb import *
>>> from pysb.integrate import Solver
>>> Model()
<Model '<interactive>' (monomers: 0, rules: 0, parameters: 0, compartments: 0) at ...>
>>> Monomer('A')
Monomer('A')
>>> Parameter('k', 3.0)
Parameter('k', 3.0)
>>> Rule('synthesize_A', None >> A(), k)
Rule('synthesize_A', None >> A(), k)
>>> t = [0, 10, 20, 30, 40, 50, 60]
>>> solver = Solver(model, t)
>>> solver.run()
>>> print(solver.y[:, 0])
[  0.  30.  60.  90. 120. 150. 180.]
```

2.3 Creating a model

The example above notwithstanding, PySB model definition is not meant to be performed in an interactive environment. The proper way to create a model is to write the code in a .py file which can then be loaded interactively or in other scripts for analysis and simulation. Here are the Python statements necessary to define the model from *First steps* above. Save this code in a file named `tutorial_a.py` (you can find a copy of this file and all other named scripts from the tutorial in `pysb/examples/`):

```
from pysb import *
```

(continues on next page)

(continued from previous page)

```
Model()
Monomer('A')
Parameter('k', 3.0)
Rule('synthesize_A', None >> A(), k)
```

Note that we did not import `pysb.integrate`, define the `t` variable or create a `Solver` object. These are part of model usage, not definition, so they do not belong here.

You may also be wondering why there are no assignment statements to be found. This is because every PySB model component automatically assigns itself to a variable named identically to the component's name (`A`, `k` and `synthesize_A` above), or `model` in the case of the `Model` object itself. This is not standard Python behavior but it makes models much more readable. The [Component](#) section below explains a bit more about this feature, and technical readers can find even more in the [Self-export](#) section.

2.4 Using a model

Now that we have created a model file, we will see how to load it and do something with it. Here is `run_tutorial_a.py`, the code corresponding to the rest of the example from [First steps](#).

```
from __future__ import print_function
from pysb.simulator import ScipyOdeSimulator
from tutorial_a import model

t = [0, 10, 20, 30, 40, 50, 60]
simulator = ScipyOdeSimulator(model, tspan=t)
simresult = simulator.run()
print(simresult.species)
```

The one line that's been added relative to the original listing is `from tutorial_a import model`. Since PySB models are just Python code, we use the standard python `import` mechanism to load them. The variable `model` which holds the `Model` object is explicitly chosen for import. All other model components defined in `tutorial_a.py` are accessible through `model`, so there is little need to import them separately.

2.5 Model creation in depth

Every model file must begin with these two lines:

```
from pysb import *
Model()
```

The first line brings in all of the Python classes needed to define a model. The second line creates an instance of the `Model` class and implicitly assigns this object to the variable `model`. We won't have to refer to `model` within the model file itself, rather this is the symbol we will later import from *other* code in order to make use of the model.

The rest of the model file will be component declarations. There are several types of components, some required and others optional. The required types are `Monomer`, `Parameter` and `Rule` – we have already encountered these in `tutorial_a.py`. The optional ones are `Observable` and `Compartment`. Each of these component types is represented by a Python class which inherits from the base class `Component`. The following sections will explain what each of these component types does in a model and how to create them.

2.5.1 Component

The base `Component` class is never explicitly used in a model, but it defines two pieces of basic functionality that are common to all component types. The first is a `name` attribute, which is specified as the first argument to the constructor for all subclasses of `Component`. The second is the “self-export” functionality, which automatically assigns every component to a local variable named for its `name` attribute. Self-export helps streamline model definition, making it feel much more like a domain-specific language like BNGL or Kappa. A justification for the technically-minded for this somewhat unusual behavior may be found in the *Self-export* section near the end of the tutorial.

2.5.2 Monomer

Monomers are the indivisible elements that will make up the molecules and complexes whose behavior you intend to model. Typically they will represent a specific protein or other biomolecule such as “EGFR” or “ATP”. Monomers have a *name* (like all components) as well as a list of *sites*. Sites are named locations on the monomer which can *bind* with a site on another monomer and/or take on a *state*. Binding merely represents aggregation, not necessarily a formal chemical bond. States can range from the biochemically specific (e.g. “phosphorylated/unphosphorylated”) to the generic (e.g. “active/inactive”). The site list is technically optional (as seen in `tutorial_a.py`) but only the simplest toy models will be able to get by without them.

The *Monomer constructor* takes a name, followed by a list of site names, and finally a dict specifying the allowable states for the sites. Sites used only for binding may be omitted from the dict.

Here we will define a monomer representing the protein **Raf**, for use in a model of the MAPK signaling cascade. We choose to give our Raf monomer two sites: **s** represents the serine residue on which it is phosphorylated by Ras to activate its own kinase activity, and **k** represents the catalytic kinase domain with which it can subsequently phosphorylate MEK. Site **s** can take on two states: ‘u’ for unphosphorylated and ‘p’ for phosphorylated:

```
Monomer('Raf', ['s', 'k'], {'s': ['u', 'p']})
```

Now let’s provide a definition for **MEK**, the substrate of Raf. MEK has two serine residues at positions 218 and 222 in the amino acid sequence which are both phosphorylated by Raf. We can’t call them both **s** as site names must be unique within a monomer, so we’ve used the residue numbers in the sites’ names to distinguish them: **s218** and **s222**. MEK has a kinase domain of its own for which we’ve again used **k**:

```
Monomer('MEK', ['s218', 's222', 'k'], {'s218': ['u', 'p'], 's222': ['u', 'p']})
```

Adding these two monomer definitions to a new model file `tutorial_b.py` yields the following:

```
from pysb import *

Model()
Monomer('Raf', ['s', 'k'], {'s': ['u', 'p']})
Monomer('MEK', ['s218', 's222', 'k'], {'s218': ['u', 'p'], 's222': ['u', 'p']})
```

We can import this model in an interactive Python session and explore its monomers:

```
>>> from tutorial_b import model
>>> model.monomers
ComponentSet([
  Monomer('Raf', ['s', 'k'], {'s': ['u', 'p']}),
  Monomer('MEK', ['s218', 's222', 'k'], {'s218': ['u', 'p'], 's222': ['u', 'p']}),
])
>>> [m.name for m in model.monomers]
['Raf', 'MEK']
```

(continues on next page)

(continued from previous page)

```
>>> model.monomers[0]
Monomer('Raf', ['s', 'k'], {'s': ['u', 'p']})
>>> model.monomers.keys()
['Raf', 'MEK']
>>> model.monomers['MEK']
Monomer('MEK', ['s218', 's222', 'k'], {'s218': ['u', 'p'], 's222': ['u', 'p']})
>>> model.monomers['MEK'].sites
['s218', 's222', 'k']
```

The `Model` class has a container for each component type, for example `monomers` holds the monomers. These component objects are the very same ones you defined in your model script – they were implicitly added to the model’s `monomers` container by the self-export system. This container is a `ComponentSet`, a special PySB class which acts like a list, a dict and a set rolled into one, although it can only hold `Component` objects and can only be appended to (never deleted from). Its list personality allows you to iterate over the components or index an individual component by integer position, with the ordering of the values corresponding to the order in which the components were defined in the model. Its dict personality allows you to index an individual component with its string name and use the standard `keys` and `items` methods. The set personality allows set operations with ordering retained. For binary set operators, the left-hand operand’s ordering takes precedence.

We can also access the fields of a `Monomer` object such as `name` and `sites`. See the [PySB core \(pysb.core\)](#) section of the module reference for documentation on the fields and methods of all the component classes.

2.5.3 Parameter

Parameters are constant numerical values that represent biological constants. A parameter can be used as a reaction rate constant, compartment volume or initial (boundary) condition for a molecular species. Other than *name*, the only other attribute of a parameter is its numerical *value*.

The [Parameter constructor](#) takes the name and value as its two arguments. The value is optional and defaults to 0.

Here we will define three parameters: a forward reaction rate for the binding of Raf and MEK and initial conditions for those two proteins:

```
Parameter('kf', 1e-5)
Parameter('Raf_0', 7e4)
Parameter('MEK_0', 3e6)
```

Add these parameter definitions to our `tutorial_b` model file to create `tutorial_c.py`:

```
from pysb import *


Model()
Monomer('Raf', ['s', 'k'], {'s': ['u', 'p']})
Monomer('MEK', ['s218', 's222', 'k'], {'s218': ['u', 'p'], 's222': ['u', 'p']})
Parameter('kf', 1e-5)
Parameter('Raf_0', 7e4)
Parameter('MEK_0', 3e6)
```

Then explore the `parameters` container:

```
>>> from tutorial_c import model
>>> model.parameters
```

(continues on next page)

(continued from previous page)

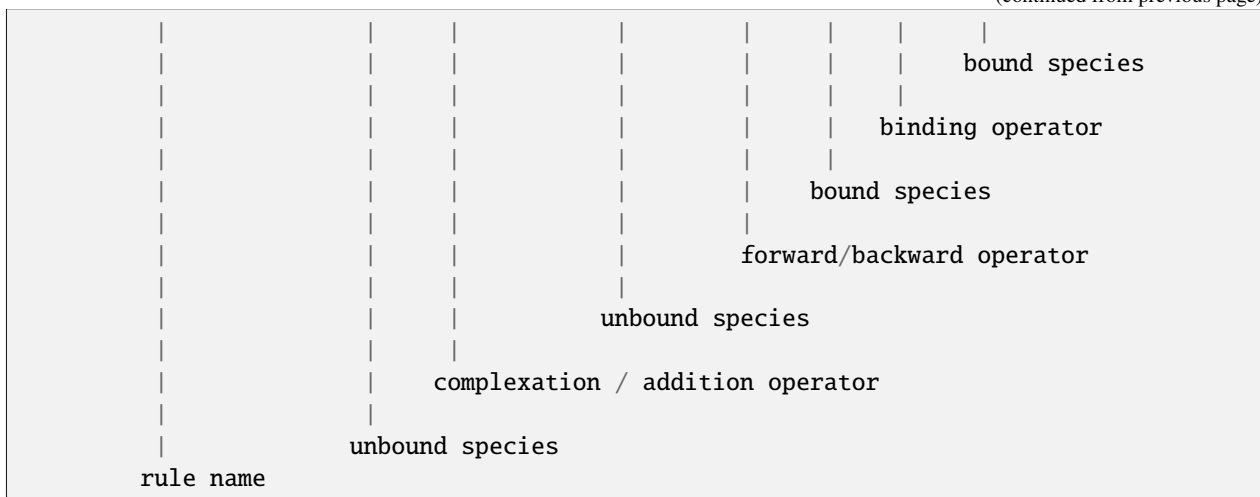

The *rule name* can be any string and should be enclosed in single (‘) or double (”) quotation marks. The species are *instances* of the monomers in a specific state. In this case we are requiring that *C8* and *Bid* are both unbound, as we would not want any binding to occur with species that are previously bound. The *complexation* or *addition* operator tells the program that the two species are being added, that is, undergoing a transition, to form a new species as specified on the right side of the rule. The forward/backward operator states that the reaction is reversible. Finally the *binding* operator indicates that there is a bond formed between two or more species. This is indicated by the matching integer (in this case *1*) in the bonding site of both species along with the *binding* operator. If a non-reversible rule is desired, then the *forward-only* operator can be replaced for the *forward/backward* operator.

In order to actually change the state of the *Bid* protein we must now edit the monomer so that have an actual state site as follows:

```
Monomer('Bid', ['b', 'S'], {'S': ['u', 't']})
```

Having added the state site we can now further specify the state of the *Bid* protein when it undergoes rule-based interactions and explicitly indicate the changes of the protein state.

With this state site added, we can now go ahead and write the rules that will account for the binding step and the unbinding step as follows:

```
Rule('C8_Bid_bind', C8(b=None) + Bid(b=None, S='u') | C8(b=1) % Bid(b=1, S='u'), kf, kr)
Rule('tBid_from_C8Bid', C8(b=1) % Bid(b=1, S='u') >> C8(b=None) + Bid(b=None, S='t'), kc)
```

As shown, the initial reactants, *C8* and *Bid* initially in the unbound state and, for *Bid*, in the ‘u’ state, undergo a complexation reaction and further a dissociation reaction to return the original *C8* protein and the *Bid* protein but now in the ‘t’ state, indicating its truncation. Make these additions to your `mymodel.py` file. After you are done, your file should look like this:

```
# import the pysb module and all its methods and functions
from pysb import *

# instantiate a model
Model()

# declare monomers
Monomer('C8', ['b'])
Monomer('Bid', ['b', 'S'], {'S': ['u', 't']})
```

(continues on next page)

(continued from previous page)

```
# input the parameter values
Parameter('kf', 1.0e-07)
Parameter('kr', 1.0e-03)
Parameter('kc', 1.0)

# now input the rules
Rule('C8_Bid_bind', C8(b=None) + Bid(b=None, S='u') | C8(b=1) % Bid(b=1, S='u'), kf, kr)
Rule('tBid_from_C8Bid', C8(b=1) % Bid(b=1, S='u') >> C8(b=None) + Bid(b=None, S='t'), kc)
```

Once you are done editing your file, start your *ipython* (or *python*) interpreter and type the commands at the prompts below. Once you load your model you should be able to probe and check that you have the correct monomers, parameters, and rules. Your output should be very similar to the one presented (output shown below the '>>>' python prompts):

```
>>> import mymodel as m
>>> m.model.monomers
ComponentSet([
  Monomer('C8', ['b']),
  Monomer('Bid', ['b', 'S'], {'S': ['u', 't']}),
])
>>> m.model.parameters
ComponentSet([
  Parameter('kf', 1e-07),
  Parameter('kr', 0.001),
  Parameter('kc', 1.0),
  Parameter('C8_0', 1000.0),
  Parameter('Bid_0', 10000.0),
])
>>> m.model.rules
ComponentSet([
  Rule('C8_Bid_bind', C8(b=None) + Bid(b=None, S='u') | C8(b=1) % Bid(b=1, S='u'), kf,
↪kr),
  Rule('tBid_from_C8Bid', C8(b=1) % Bid(b=1, S='u') >> C8(b=None) + Bid(b=None, S='t'),
↪kc),
])
```

With this we are almost ready to run a simulation; all we need now is to specify the initial conditions of the system.

2.5.5 Observables

In our model we have two initial species (*C8* and *Bid*) and one output species (*tBid*). As can be seen in the ODEs derived from the reactions above, there are four mathematical species needed to describe the evolution of the system (i.e. *C8*, *Bid*, *tBid*, and *C8:Bid*). Although this system is rather small, there are situations when we will have many more species than we care to monitor or characterize throughout the time evolution of the ODEs. In addition, it will often happen that the desirable species are combinations or sums of many other species. For this reason the rules-based engines we currently employ implement the *Observables* call which automatically collects the necessary information and returns the desired species. In our case, we will monitor the amount of free *C8*, unbound *Bid*, and active *tBid*. To specify the observables enter the following lines in your `mymodel.py` file as follows:

```
Observable('obsC8', C8(b=None))
Observable('obsBid', Bid(b=None, S='u'))
Observable('obstBid', Bid(b=None, S='t'))
```

As shown, the observable can be a species. As we will show later the observable can also contain wild-cards and given the “don’t care don’t write” approach to rule-writing, it can be a very powerful approach to observe activated complexes.

2.6 Initial conditions

Having specified the *monomers*, the *parameters* and the *rules* we have the basics of what is needed to generate a set of ODEs and run a model. From a mathematical perspective a system of ODEs can only be solved if a bound is placed on the ODEs for integration. In our case, these bounds are the initial conditions of the system that indicate how much non-zero initial species are present at time $t=0s$ in the system. In our system, we only have two initial species, namely *C8* and *Bid* so we need to specify their initial concentrations. To do this we enter the following lines of code into the `mymodel.py` file:

```
Parameter('C8_0', 1000)
Parameter('Bid_0', 10000)
Initial(C8(b=None), C8_0)
Initial(Bid(b=None, S='u'), Bid_0)
```

A parameter object must be declared to specify the initial condition rather than just giving a value as shown above. Once the parameter object is declared (i.e. *C8_0* and *Bid_0*) it can be fed to the *Initial* definition. Now that we have specified the initial conditions we are basically ready to run simulations. We will add an *observables* call in the next section prior to running the simulation.

2.7 Simulation and analysis

By now your `mymodel.py` file should look something like this:

```
# import the pysb module and all its methods and functions
from pysb import *

# instantiate a model
Model()

# declare monomers
Monomer('C8', ['b'])
Monomer('Bid', ['b', 'S'], {'S':['u', 't']})

# input the parameter values
Parameter('kf', 1.0e-07)
Parameter('kr', 1.0e-03)
Parameter('kc', 1.0)

# now input the rules
Rule('C8_Bid_bind', C8(b=None) + Bid(b=None, S='u') | C8(b=1) % Bid(b=1, S='u'), *[kf,
↪kr])
Rule('tBid_from_C8Bid', C8(b=1) % Bid(b=1, S='u') >> C8(b=None) + Bid(b=None, S='t'), kc)
```

(continues on next page)

(continued from previous page)

```
# initial conditions
Parameter('C8_0', 1000)
Parameter('Bid_0', 10000)
Initial(C8(b=None), C8_0)
Initial(Bid(b=None, S='u'), Bid_0)

# Observables
Observable('obsC8', C8(b=None))
Observable('obsBid', Bid(b=None, S='u'))
Observable('obstBid', Bid(b=None, S='t'))
```

You can use a few commands to check that your model is defined properly. Start your *ipython* (or *python*) interpreter and enter the commands as shown below. Notice the output should be similar to the one shown (output shown below the '>>>' prompts):

```
>>> import mymodel as m
>>> m.model.monomers
ComponentSet([
  Monomer('C8', ['b']),
  Monomer('Bid', ['b', 'S'], {'S': ['u', 't']}),
])
>>> m.model.parameters
ComponentSet([
  Parameter('kf', 1e-07),
  Parameter('kr', 0.001),
  Parameter('kc', 1.0),
  Parameter('C8_0', 1000.0),
  Parameter('Bid_0', 10000.0),
])
>>> m.model.observables
ComponentSet([
  Observable('obsC8', C8(b=None)),
  Observable('obsBid', Bid(b=None, S='u')),
  Observable('obstBid', Bid(b=None, S='t')),
])
>>> m.model.initials
[Initial(C8(b=None), C8_0), Initial(Bid(b=None, S='u'), Bid_0)]
>>> m.model.rules
ComponentSet([
  Rule('C8_Bid_bind', C8(b=None) + Bid(b=None, S='u') | C8(b=1) % Bid(b=1, S='u'), kf,
↪ kr),
  Rule('tBid_from_C8Bid', C8(b=1) % Bid(b=1, S='u') >> C8(b=None) + Bid(b=None, S='t'),
↪ kc),
])
```

With this we are now ready to run a simulation! The parameter values for the simulation were taken directly from typical values in the paper about [extrinsic apoptosis signaling](#). To run the simulation we must use a numerical integrator. Common examples include LSODA, VODE, CVODE, Matlab's ode15s, etc. We will use two *python* modules that are very useful for numerical manipulation. We have adapted the integrators in the *SciPy*^[#sp] module to function seamlessly with *PySB* for integration of ODE systems. We will also be using the **PyLab*² package for graphing and

² PyLab: <http://www.scipy.org/PyLab>

plotting from the command line.

We will begin our simulation by loading the model from the *ipython* (or *python*) interpreter as shown below:

```
>>> import mymodel as m
```

You can check that your model imported correctly by typing a few commands related to your model as shown:

```
>>> m.mymodel.monomers
>>> m.mymodel.rules
```

Both commands should return information about your model. (Hint: If you are using *iPython*, you can press tab twice after “m.mymodel” to tab complete and see all the possible options).

Now, we will import the *PyLab* and *PySB* simulator module. Enter the commands as shown below:

```
>>> from pysb.simulator import ScipyOdeSimulator
>>> import pylab as pl
```

We have now loaded the integration engine and the graph engine into the interpreter environment. You may get some feedback from the program as some functions can be compiled at runtime for speed, depending on your operating system. Next we need to tell the integrator the time domain over which we wish to integrate the equations. For our case we will use 20000s of simulation time. To do this we generate an array using the *linspace* function from *PyLab*. Enter the command below:

```
>>> t = pl.linspace(0, 20000)
```

This command assigns an array in the range [0..20000] to the variable *t*. You can type the name of the variable at any time to see the content of the variable. Typing the variable *t* results in the following:

```
>>> t
array([[ 0.,          408.16326531,    816.32653061,   1224.48979592,
        1632.65306122,   2040.81632653,   2448.97959184,   2857.14285714,
        3265.30612245,   3673.46938776,   4081.63265306,   4489.79591837,
        4897.95918367,   5306.12244898,   5714.28571429,   6122.44897959,
        6530.6122449 ,   6938.7755102 ,   7346.93877551,   7755.10204082,
        8163.26530612,   8571.42857143,   8979.59183673,   9387.75510204,
        9795.91836735,  10204.08163265,  10612.24489796,  11020.40816327,
       11428.57142857,  11836.73469388,  12244.89795918,  12653.06122449,
       13061.2244898 ,  13469.3877551 ,  13877.55102041,  14285.71428571,
       14693.87755102,  15102.04081633,  15510.20408163,  15918.36734694,
       16326.53061224,  16734.69387755,  17142.85714286,  17551.02040816,
       17959.18367347,  18367.34693878,  18775.51020408,  19183.67346939,
       19591.83673469,  20000.          ]])
```

These are the points at which we will get data for each ODE from the integrator. With this, we can now run our simulation. Enter the following commands to run the simulation and get the results:

```
>>> simres = ScipyOdeSimulator(m.model, tspan=t).run()
>>> yout = simres.all
```

To verify that the simulation run you can see the content of the *yout* object. For example, check for the content of the *Bid* observable defined previously:

```
>>> yout['obsBid']
array([10000.,          9600.82692793,   9217.57613337,   8849.61042582,
```

(continues on next page)

(continued from previous page)

```

8496.32045796, 8157.12260855, 7831.45589982, 7518.7808708 ,
7218.58018014, 6930.35656027, 6653.63344844, 6387.95338333,
6132.87596126, 5887.9786933 , 5652.8553495 , 5427.11687478,
5210.38806188, 5002.31066362, 4802.53910592, 4610.74136092,
4426.60062334, 4249.81001719, 4080.07733278, 3917.1205927 ,
3760.66947203, 3610.46475238, 3466.25716389, 3327.80762075,
3194.88629188, 3067.27263727, 2944.75491863, 2827.12948551,
2714.20140557, 2605.78289392, 2501.69402243, 2401.76203172,
2305.8208689 , 2213.71139112, 2125.28052884, 2040.38151896,
1958.87334783, 1880.62057855, 1805.49336521, 1733.36675338,
1664.12107023, 1597.64120743, 1533.81668871, 1472.54158105,
1413.71396601, 1357.23623273])

```


As you may recall we named some observables in the *Observables* section above. The variable *yout* contains an array of all the ODE outputs from the integrators along with the named observables (i.e. *obsBid*, *obstBid*, and *obsC8*) which can be called by their names. We can therefore plot this data to visualize our output. Using the commands imported from the *PyLab* module we can create a graph interactively. Enter the commands as shown below:

```

>>> pl.ion()
>>> pl.figure()
>>> pl.plot(t, yout['obsBid'], label="Bid")
>>> pl.plot(t, yout['obstBid'], label="tBid")
>>> pl.plot(t, yout['obsC8'], label="C8")
>>> pl.legend()
>>> pl.xlabel("Time (s)")
>>> pl.ylabel("Molecules/cell")
>>> pl.show()

```

You should now have a figure in your screen showing the number of *Bid* molecules from the initial amount decreasing over time, the number of *tBid* molecules increasing over time, and the number of free *C8* molecules decrease to about half. For help with the above commands and to see more commands related to *PyLab* check the documentation [Page 15, 2](#). Your figure should look something like the one below:

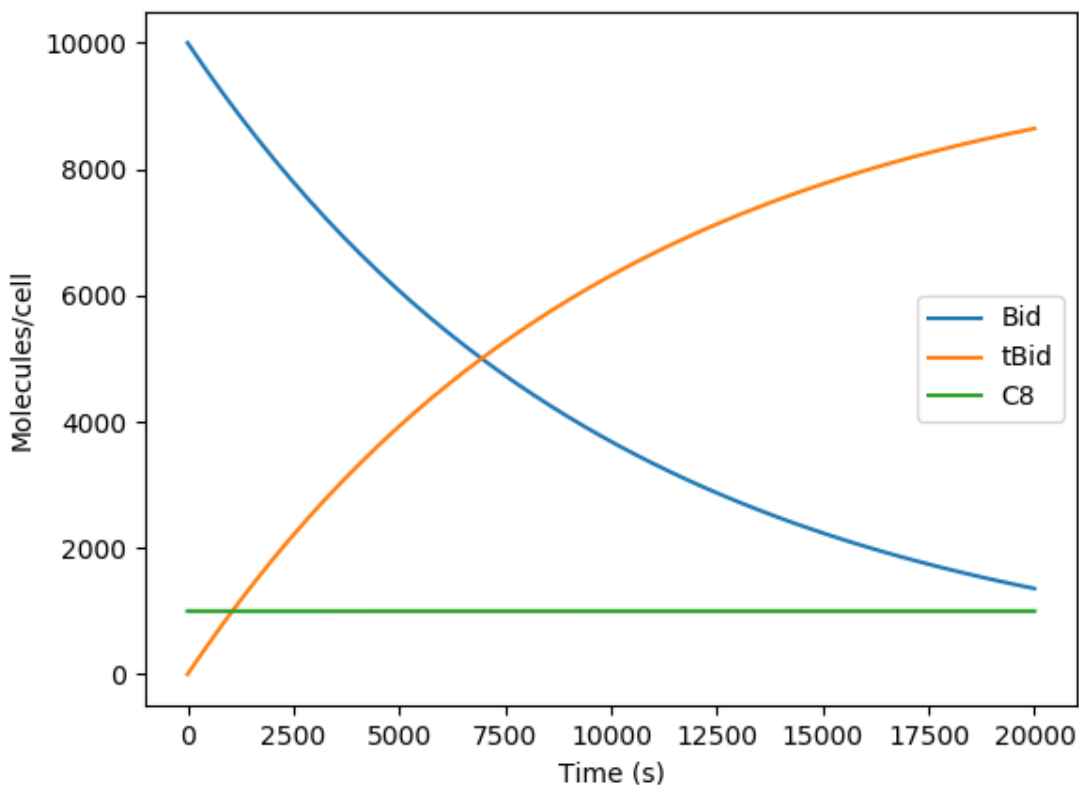

Congratulations! You have created your first model and run a simulation!

2.8 Visualization

It is useful to visualize the species and reactions that make a model. We have provided two methods to visualize species and reactions. We recommend using the tools in [Kappa](#) and [BioNetGen](#) for other visualization tools such as contact maps and stories.

The simplest way to visualize a model is to generate the graph file using the programs available from the command line. The files are located in the `.../pysb/tools` directory. The files to visualize reactions and species are `render_reactions.py` and `render_species.py`. These python scripts will generate `.dot` graph files that can be visualized using several tools such as [OmniGraffle](#) in OS X or [GraphViz](#) in all major platforms. For this tutorial we will use the [GraphViz](#) renderer. For this example we will visualize the `mymodel.py` file that was created earlier. Issue the following command, replacing the comments inside square brackets with the correct paths. We will first generate the `.dot` from the command line as follows:

```
[path-to-pysb]/pysb/tools/render_reactions.py [path-to-pysb-model-file]/mymodel.py > mymodel.dot
```

If your model can be properly visualized you should have gotten no errors and should now have a file called `mymodel.dot`. You can now use this file as an input for any visualization tool as described above. You can follow the same procedures with the `render_species.py` script to visualize the species generated by your models.

2.9 Higher-order rules

For this section we will show the power of working in a programming environment by creating a simple function called “catalyze”. Catalysis happens quite often in models and it is one of the basic functions we have found useful in our model development. Rather than typing many lines such as:

```
Rule("association", Enz(b=None) + Sub(b=None, S="i") | Enz(b=1)%Sub(b=1,S="i"), kf, kr)
Rule("dissociation", Enz(b=1)%Sub(b=1,S="i") >> Enz(b=None) + Sub(b=None, S="a"), kc)
```

multiple times, we find it more powerful, transparent and easy to instantiate/edit a simple, one-line function call such as:

```
catalyze(Enz, Sub, "S", "i", "a", kf, kr, kc)
```

We find that the functional form captures what we mean to write: a chemical species (the substrate) undergoes catalytic activation (by the enzyme) with a given set of parameters. We will now describe how a function can be written in PySB to automate the scripting of simple concepts into a programmatic format. Examine the function below:

```
def catalyze(enz, sub, site, state1, state2, kf, kr, kc): # (0) function call
    """2-step catalytic process""" # (1) reaction name
    r1_name = '%s_assoc_%s' % (enz.name, sub.name) # (2) name of association
    ↪reaction for rule
    r2_name = '%s_diss_%s' % (enz.name, sub.name) # (3) name of dissociation
    ↪reaction for rule
    E = enz(b=None) # (4) define enzyme state in
    ↪function
    S = sub({'b': None, site: state1}) # (5) define substrate state
    ↪in function
    ES = enz(b=1) % sub({'b': 1, site: state1}) # (6) define state of
    ↪enzyme:substrate complex
    P = sub({'b': None, site: state2}) # (7) define state of product
    Rule(r1_name, E + S | ES, kf, kr) # (8) rule for enzyme +
    ↪substrate association (bidirectional)
    Rule(r2_name, ES >> E + P, kc) # (9) rule for
    ↪enzyme:substrate dissociation (unidirectional)
```

As shown it takes about ten lines to write the catalyze function (shorter variants are certainly possible with more advanced *Python* statements).

As shown, *Monomers*, *Parameters*, *Species*, and pretty much anything related to rules-based modeling are instantiated as objects in *Python*. One could write functions to interact with these objects and they could be instantiated and inherit methods from a class. The limits to programming biology with PySB are those enforced by the *Python* language itself. We can now go ahead and embed this into a model. Go back to your `mymodel.py` file and modify it to look something like this:

```
# import the pysb module and all its methods and functions
from pysb import *

def catalyze(enz, sub, site, state1, state2, kf, kr, kc): # function call
    """2-step catalytic process""" # reaction name
    r1_name = '%s_assoc_%s' % (enz.name, sub.name) # name of association
    ↪reaction for rule
    r2_name = '%s_diss_%s' % (enz.name, sub.name) # name of dissociation
```

(continues on next page)

(continued from previous page)

```

↪reaction for rule
    E = enz(b=None) # define enzyme state in_
↪function
    S = sub({'b': None, site: state1}) # define substrate state in_
↪function
    ES = enz(b=1) % sub({'b': 1, site: state1}) # define state of_
↪enzyme:substrate complex
    P = sub({'b': None, site: state2}) # define state of product
    Rule(r1_name, E + S | ES, kf, kr) # rule for enzyme +_
↪substrate association (bidirectional)
    Rule(r2_name, ES >> E + P, kc) # rule for enzyme:substrate_
↪dissociation (unidirectional)

# instantiate a model
Model()

# declare monomers
Monomer('C8', ['b'])
Monomer('Bid', ['b', 'S'], {'S':['u', 't']})

# input the parameter values
Parameter('kf', 1.0e-07)
Parameter('kr', 1.0e-03)
Parameter('kc', 1.0)

# OLD RULES
# Rule('C8_Bid_bind', C8(b=None) + Bid(b=None, S='u') | C8(b=1) % Bid(b=1, S='u'), *[kf, kr])
# Rule('tBid_from_C8Bid', C8(b=1) % Bid(b=1, S='u') >> C8(b=None) + Bid(b=None, S='t'), kc)
#
# NEW RULES
# Catalysis
catalyze(C8, Bid, 'S', 'u', 't', kf, kr, kc)

# initial conditions
Parameter('C8_0', 1000)
Parameter('Bid_0', 10000)
Initial(C8(b=None), C8_0)
Initial(Bid(b=None, S='u'), Bid_0)

# Observables
Observable('obsC8', C8(b=None))
Observable('obsBid', Bid(b=None, S='u'))
Observable('obstBid', Bid(b=None, S='t'))

```

With this you should be able to execute your code and generate figures as described in the previous sections.

2.10 Using provided macros

For further reference we invite the users to explore the `macros.py` file in the `.../pysb/` directory. Based on our experience with modeling signal transduction pathways we have identified a set of commonly-used constructs that can serve as building blocks for more complex models. In addition to some meta-macros useful for instantiating user macros, we provide a set of macros such as `equilibrate`, `bind`, `catalyze`, `catalyze_one_step`, `catalyze_one_step_reversible`, `synthesize`, `degrade`, `assemble_pore_sequential`, and `pore_transport`. In addition to these basic macros we also provide the higher-level macros `bind_table` and `catalyze_table` which we have found useful in instantiating the interactions between families of models.

In what follows we expand our previous model example of Caspase-8 by adding a few more species. The initiator caspase, as was described earlier, catalytically cleaves Bid to create truncated Bid (`tBid`) in this model. This `tBid` then catalytically activates Bax and Bak which eventually go on to form pores at the mitochondria leading to mitochondrial outer-membrane permeabilization (MOMP) and eventual cell death. To introduce the concept of higher-level macros we will show how the `bind_table` macro can be used to show how a family of inhibitors, namely Bcl-2, Bcl-xL, and Mcl-1 inhibits a family of proteins, namely Bid, Bax, and Bak.

In your favorite editor, go ahead and create a file (I will refer to it as `::file::mymodel_fxns`). Many rules that dictate the interactions among species depend on a single binding site. We will begin by creating our model and declaring a generic binding site. We will also declare some functions, using the PySB macros and tailor them to our needs by specifying the binding site to be passed to the function. The first thing we do is import PySB and then import PySB macros. Then we declare our generic site and redefine the `pysb.macros` for our model as follows:

```
# import the pysb module and all its methods and functions
from pysb import *
from pysb.macros import *

# some functions to make life easy
site_name = 'b'
def catalyze_b(enz, sub, product, klist):
    """Alias for pysb.macros.catalyze with default binding site 'b'.
    """
    return catalyze(enz, site_name, sub, site_name, product, klist)
def bind_table_b(table):
    """Alias for pysb.macros.bind_table with default binding sites 'bf'.
    """
    return bind_table(table, site_name, site_name)
```

The first two lines just import the necessary modules from PySB. The `catalyze_b` function, tailored for the model, takes four inputs but feeds six inputs to the `pysb.macros.catalyze` function, hence making the model more clean. Similarly the `bind_table_b` function takes only one entry, a list of lists, and feeds the entries needed to the `pysb.macros.bind_table` macro. Note that these entries could be contained in a header file to be hidden from the user at model time.

With this technical work out of the way we can now actually start our model building. We will declare two sets of rates, the `bid_rates` that we will use for all the Bid interactions and the `bcl2_rates` which we will use for all the Bcl-2 interactions. These values could be specified individually as desired but it is common practice in models to use generic values for the reaction rate parameters of a model and determine these in detail through some sort of model calibration. We will use these values for now for illustrative purposes.

The next entries for the rates, the model declaration, and the Monomers follow:

```
# Bid activation rates
bid_rates = [          1e-7, 1e-3, 1] #
```

(continues on next page)

(continued from previous page)

```

# Bcl2 Inhibition Rates
bcl2_rates = [1.428571e-05, 1e-3] # 1.0e-6/v_mito

# instantiate a model
Model()

# declare monomers
Monomer('C8',    ['b'])
Monomer('Bid',   ['b', 'S'], {'S':['u', 't', 'm']})
Monomer('Bax',   ['b', 'S'], {'S':['i', 'a', 'm']})
Monomer('Bak',   ['b', 'S'], {'S':['i', 'a']})
Monomer('BclxL', ['b', 'S'], {'S':['c', 'm']})
Monomer('Bcl2',  ['b'])
Monomer('Mcl1',  ['b'])

```

As shown, the generic rates are declared followed by the declaration of the monomers. We have the C8 and Bid monomers as we did in the initial part of the tutorial, the MOMP effectors Bid, Bax, Bak, and the MOMP inhibitors Bcl-xL, Bcl-2, and Mcl-1. The Bid, Bax, and BclxL monomers, in addition to the active and inactive terms also have a 'm' term indicating that they can be in a membrane, which in this case we indicate as a state. We will have a translocation to the membrane as part of the reactions.

We can now begin to write some checmical procedures. The first procedure is the catalytic activation of Bid by C8. This is followed by the catalytic activation of Bax and Bak.

```

# Activate Bid
catalyze_b(C8, Bid(S='u'), Bid(S='t'), [KF, KR, KC])

# Activate Bax/Bak
catalyze_b(Bid(S='m'), Bax(S='i'), Bax(S='m'), bid_rates)
catalyze_b(Bid(S='m'), Bak(S='i'), Bak(S='a'), bid_rates)

```

As shown, we simply state the species that acts as an *enzyme* as the first function argument, the species that acts as the *reactant* with the enzyme as the second argument (along with any state specifications) and finally the *product* species. The `bid_rates` argument is the list of rates that we declared earlier.

You may have noticed a problem with the previous statements. The Bid species undergoes a transformation from state `S='u'` to `S='t'` but the activation of Bax and Bak happens only when Bid is in state `S='m'` to imply that these events only happen at the membrane. In order to transport Bid from the 't' state to the 'm' state we need a transport function. We achieve this by using the *equilibrate* macro in PySB between these states. In addition we use this same macro for the transport of the Bax species and the BclxL species as shown below.

```

# Bid, Bax, BclxL "transport" to the membrane
equilibrate(Bid(b=None, S='t'), Bid(b=None, S='m'), [1e-1, 1e-3])
equilibrate(Bax(b=None, S='m'), Bax(b=None, S='a'), [1e-1, 1e-3])
equilibrate(BclxL(b=None, S='c'), BclxL(b=None, S='m'), [1e-1, 1e-3])

```

According to published experimental data, the Bcl-2 family of inhibitors can inhibit the initiator Bid and the effector Bax and Bak. This family has complex interactions with all these proteins. Given that we have three inhibitors, and three molecules to be inhibited, this indicates nine interactions that need to be specified. This would involve writing nine reversible reactions in a rules language or at least eighteen reactions for each direction if we were writing the ODEs. Given that we are simply stating that these species *bind* to inhibit interactions, we can take advantage of two things. In the first case we have already seen that there is a *bind* macro specified in PySB. We can further functionalize this into a higher level macro, namely the *bind_table* macro, which takes a table of interactions as an argument and

generates the rules based on these simple interactions. We specify the bind table for the inhibitors (top row) and the inhibited molecules (left column) as follows.

```
bind_table_b([[
                Bcl2, BclxL(S='m'), Mcl1],
              [Bid(S='m'), bcl2_rates, bcl2_rates, bcl2_rates],
              [Bax(S='a'), bcl2_rates, bcl2_rates, None],
              [Bak(S='a'), None, bcl2_rates, bcl2_rates]])
```

As shown the inhibitors interact by giving the rates of interactions or the “None” Python keyword to indicate no interaction. The only thing left to run this simple model is to declare some initial conditions and some observables. We declare the following:

```
# initial conditions
Parameter('C8_0', 1e4)
Parameter('Bid_0', 1e4)
Parameter('Bax_0', .8e5)
Parameter('Bak_0', .2e5)
Parameter('BclxL_0', 1e3)
Parameter('Bcl2_0', 1e3)
Parameter('Mcl1_0', 1e3)

Initial(C8(b=None), C8_0)
Initial(Bid(b=None, S='u'), Bid_0)
Initial(Bax(b=None, S='i'), Bax_0)
Initial(Bak(b=None, S='i'), Bak_0)
Initial(BclxL(b=None, S='c'), BclxL_0)
Initial(Bcl2(b=None), Bcl2_0)
Initial(Mcl1(b=None), Mcl1_0)

# Observables
Observable('obstBid', Bid(b=None, S='m'))
Observable('obsBax', Bax(b=None, S='a'))
Observable('obsBak', Bax(b=None, S='a'))
Observable('obsBaxBclxL', Bax(b=1, S='a')%BclxL(b=1, S='m'))
```

By now you should have a file with all the components that looks something like this:

```
# import the pysb module and all its methods and functions
from pysb import *
from pysb.macros import *

# some functions to make life easy
site_name = 'b'
def catalyze_b(enx, sub, product, klist):
    """Alias for pysb.macros.catalyze with default binding site 'b'.
    """
    return catalyze(enx, site_name, sub, site_name, product, klist)

def bind_table_b(table):
    """Alias for pysb.macros.bind_table with default binding sites 'bf'.
    """
    return bind_table(table, site_name, site_name)

# Default forward, reverse, and catalytic rates
```

(continues on next page)

(continued from previous page)

```

KF = 1e-6
KR = 1e-3
KC = 1

# Bid activation rates
bid_rates = [1e-7, 1e-3, 1] #

# Bcl2 Inhibition Rates
bcl2_rates = [1.428571e-05, 1e-3] # 1.0e-6/v_mito

# instantiate a model
Model()

# declare monomers
Monomer('C8', ['b'])
Monomer('Bid', ['b', 'S'], {'S': ['u', 't', 'm']})
Monomer('Bax', ['b', 'S'], {'S': ['i', 'a', 'm']})
Monomer('Bak', ['b', 'S'], {'S': ['i', 'a']})
Monomer('BclxL', ['b', 'S'], {'S': ['c', 'm']})
Monomer('Bcl2', ['b'])
Monomer('Mcl1', ['b'])

# Activate Bid
catalyze_b(C8, Bid(S='u'), Bid(S='t'), [KF, KR, KC])

# Activate Bax/Bak
catalyze_b(Bid(S='m'), Bax(S='i'), Bax(S='m'), bid_rates)
catalyze_b(Bid(S='m'), Bak(S='i'), Bak(S='a'), bid_rates)

# Bid, Bax, BclxL "transport" to the membrane
equilibrate(Bid(b=None, S='t'), Bid(b=None, S='m'), [1e-1, 1e-3])
equilibrate(Bax(b=None, S='m'), Bax(b=None, S='a'), [1e-1, 1e-3])
equilibrate(BclxL(b=None, S='c'), BclxL(b=None, S='m'), [1e-1, 1e-3])

bind_table_b([[
    Bcl2, BclxL(S='m'), Mcl1,
    [Bid(S='m'), bcl2_rates, bcl2_rates, bcl2_rates],
    [Bax(S='a'), bcl2_rates, bcl2_rates, None],
    [Bak(S='a'), None, bcl2_rates, bcl2_rates]])

# initial conditions
Parameter('C8_0', 1e4)
Parameter('Bid_0', 1e4)
Parameter('Bax_0', .8e5)
Parameter('Bak_0', .2e5)
Parameter('BclxL_0', 1e3)
Parameter('Bcl2_0', 1e3)
Parameter('Mcl1_0', 1e3)

Initial(C8(b=None), C8_0)
Initial(Bid(b=None, S='u'), Bid_0)
Initial(Bax(b=None, S='i'), Bax_0)

```

(continues on next page)

(continued from previous page)

```

Initial(Bak(b=None, S='i'), Bak_0)
Initial(BclxL(b=None, S='c'), BclxL_0)
Initial(Bcl2(b=None), Bcl2_0)
Initial(Mcl1(b=None), Mcl1_0)

# Observables
Observable('obstBid', Bid(b=None, S='m'))
Observable('obsBax', Bax(b=None, S='a'))
Observable('obsBak', Bax(b=None, S='a'))
Observable('obsBaxBclxL', Bax(b=1, S='a')%BclxL(b=1, S='m'))

```

With this you should be able to run the simulations and generate figures as described in the basic tutorial sections.

2.11 Compartments

We will continue building on your `mymodel_fxns.py` file and add one more species and a compartment. In extrinsic apoptosis, once *tBid* is activated it translocates to the outer mitochondrial membrane where it interacts with the protein *Bak* (residing in the membrane).

2.12 Model calibration

One option for model calibration in PySB is [PyDREAM](#), which is an implementation of the DREAM algorithm developed by Vrugt and ter Braak (2008) and Laloy and Vrugt (2012).

2.13 Modules

See [PySB Modules Reference](#) for further details on the various PySB modules and the options available.

2.14 Miscellaneous

2.14.1 Self-export

For anyone who feels a little queasy about self-export, this section will try to explain the rationale behind it.

In order to make model definition feel like a domain-specific language specially designed for model construction, the mechanism for component definition needs to provide three things:

- It must provide an internal name so that components can be usefully distinguished when inspected interactively, or translated into various output file formats such as BNGL.
- The component object must be assigned to a local variable so that subsequent component declarations can reference it by name using normal Python syntax (including operator overloading).
- The object must also be inserted into the data structures of the model object itself.

Without self-export, every component definition would need to manage these points explicitly:

```
A = Monomer('A')
model.add_component(A)
B = Monomer('B')
model.add_component(B)
```

This pattern introduces several opportunities for error, for example a `name` argument and the corresponding variable name may end up out of sync or the modeler may forget an `add_component` call. The redundancy also introduces visual noise which makes the code harder to read. Furthermore, self-export makes model modularization much simpler, as components may be defined within functions without forcing the function to explicitly return them or requiring extra code in the caller to deal with the returned components.

In addition to `Component` and its subclasses, the `Model` constructor also utilizes self-export, with two differences: The local variable is always named `model`, and the `name` argument is optional and defaults to the full hierarchical name of the module from which `Model()` is called, e.g. `pysb.examples.tutorial_a`.

FREQUENTLY ASKED QUESTIONS

Below are some of PySB's frequently asked questions. If your question is not answered here, you can try our [Gitter channel](#). For more general Python related questions, we recommend [Stack Overflow](#).

3.1 General

- What Python versions does PySB support?

The current release of PySB supports Python 3.6, 3.7, and 3.8. Earlier versions, including Python 2.7, are not supported from PySB 2.0 onwards.

In PySB version 1.5 and earlier, the `<>` operator was used for reversible rules. `<>` is pending deprecation from PySB, and does not work at all in Python 3. All new models should use `|` as the reversible rule operator. Previous models should be upgraded if compatibility with future PySB versions is required.

3.2 Rule and Reaction Rate Laws

- Can I specify a non-mass action rate law?

Yes. PySB has a special entity for this, called Expressions. Expressions can be used in place of Parameters for rule rates. Expressions can contain mathematical expressions and can utilize other Expressions, Parameters, and Observables. Here's a contrived example for demonstration purposes:

```
Parameter('A_multiplier', 2.0)
Observable('A_total', A())
Expression('kf_A', A_total * A_multiplier)
Rule('bindA', A(b=None) + A(b=None) >> A(b=1) % A(b=1), kf_A)
```

Like Parameters, note that Expressions are multiplied by reactant species concentrations within a rule to get the final rate.

- Can I use a discontinuous rate law, like a [Heaviside](#) function?

Yes. For simple examples like the Heaviside function, one could simply write a rate Expression like the following:

```
Observable('A_total', A())
Parameter('p1', 1.0)
Expression('e1', (A_total > 100) * p1)
```

The inequality in parentheses evaluates to 1 if True and 0 if False. Thus, the Expression will be equal to $p1$ when $A_{total} > 100$ and 0 otherwise.

For more complex piecewise expressions, sympy's Piecewise can be used:

```
Expression('kf_A', Piecewise((0, A_total < 400.0),
                             (0.001, A_total < 500.0),
                             (0.01, True)))
```

Piecewise takes a list of (value, condition) tuples. The Expression's value will come from the first condition which evaluates to True. Thus, for the Expression to always have a value, the last condition should default to True.

3.3 Simulation

- How can I speed up my *ScipyOdeSimulator* simulation?

Check the cython library is installed. *cython* is a Python library which converts your system of ordinary differential equations (ODEs) to C code, which is faster to execute than pure Python code. You can check if *cython* is installed by trying to import it at the Python prompt:

```
import cython
```

If no *ImportError* appears, *cython* is available. Otherwise, you'll need to install it using *pip* or *conda*.

When running large numbers of simulations, consider using the *CupSodaSimulator* if you have an NVIDIA graphics card (GPU) available. It is a GPU-based simulator which can run lots of simulations in parallel. See the *Simulator module documentation* for details.

PYSB MODULES REFERENCE

4.1 PySB core (`pysb.core`)

class `pysb.core.ANY`

Site must have a bond, but identity of binding partner is irrelevant.

Use ANY in a MonomerPattern `site_conditions` dict to indicate that a site must have a bond without specifying what the binding partner should be.

Equivalent to the “+” bond modifier in BNG.

class `pysb.core.Compartment`(*name*, *parent*=None, *dimension*=3, *size*=None, *_export*=True)

Model component representing a bounded reaction volume.

Parameters

parent

[Compartment, optional] Compartment which contains this one. If not specified, this will be the outermost compartment and its parent will be set to None.

dimension

[integer, optional] The number of spatial dimensions in the compartment, either 2 (i.e. a membrane) or 3 (a volume).

size

[Parameter or Expression, optional] A parameter or constant expression object whose value defines the volume or area of the compartment. If not specified, the size will be fixed at 1.0.

Notes

The compartments of a model must form a tree via their *parent* attributes with a three-dimensional (volume) compartment at the root. A volume compartment may have any number of two-dimensional (membrane) compartments as its children, but never another volume compartment. A membrane compartment may have a single volume compartment as its child, but nothing else.

Examples

```
Compartment('cytosol', dimension=3, size=cyto_vol, parent=ec_membrane)
```

Attributes

Identical to Parameters (see above).

exception `pysb.core.CompartmentAlreadySpecifiedError`

class `pysb.core.ComplexPattern(monomer_patterns, compartment, match_once=False)`

A bound set of MonomerPatterns, i.e. a pattern to match a complex.

In BNG terms, a list of patterns combined with the '.' operator.

Parameters

monomer_patterns

[list of MonomerPatterns] MonomerPatterns that make up the complex.

compartment

[Compartment or None] Location restriction. None means don't care.

match_once

[bool, optional] If True, the pattern will only count once against a species in which the pattern can match the monomer graph in multiple distinct ways. If False (default), the pattern will count as many times as it matches the monomer graph, leading to a faster effective reaction rate.

Attributes

Identical to Parameters (see above).

copy()

Implement our own brand of shallow copy.

The new object will have references to the original compartment, and copies of the monomer_patterns.

is_concrete()

Return a bool indicating whether the pattern is 'concrete'.

'Concrete' means the pattern satisfies ANY of the following: 1. All monomer patterns are concrete 2. The compartment is specified AND all monomer patterns are site-concrete

is_equivalent_to(*other*)

Test a concrete ComplexPattern for equality with another.

Use of this method on non-concrete ComplexPatterns was previously allowed, but is now deprecated.

matches(*other*)

Compare another ComplexPattern against this one

Parameters

other: ComplexPattern

A ComplexPattern to match against self

Returns

bool

True if other matches self; False otherwise.

class `pysb.core.Component`(*name*, *_export=True*)

The base class for all the named things contained within a model.

Parameters

name

[string] Name of the component. Must be unique within the containing model.

Attributes

name

[string] Name of the component.

model

[weakref(Model)] Containing model.

rename(*new_name*)

Change component's name.

This is typically only needed when deriving one model from another and it would be desirable to change a component's name in the derived model.

exception `pysb.core.ComponentDuplicateNameError`

A component was added with the same name as an existing one.

class `pysb.core.ComponentSet`(*iterable=None*)

An add-and-read-only container for storing model Components.

It behaves mostly like an ordered set, but components can also be retrieved by name *or* index by using the [] operator (like a combination of a dict and a list). Components cannot be removed or replaced, but they can be renamed. Iteration returns the component objects.

Parameters

iterable

[iterable of Components, optional] Initial contents of the set.

filter(*filter_predicate*)

Filter a ComponentSet using a predicate or set of predicates

Parameters

filter_predicate: callable or pysb.pattern.FilterPredicate

A predicate (condition) to test each Component in the ComponentSet against. This can either be an anonymous “lambda” function or a subclass of `pysb.pattern.FilterPredicate`. For lambda functions, the argument is a single Component and return value is a boolean indicating a match or not.

Returns

ComponentSet

A ComponentSet containing Components matching all of the supplied filters

Examples

```
>>> from pysb.examples.earn_1_0 import model
>>> from pysb.pattern import Name, Pattern, Module, Function
>>> m = model.monomers
```

Find parameters exactly equal to 10000:

```
>>> model.parameters.filter(lambda c: c.value == 1e4)
ComponentSet([
  Parameter('pC3_0', 10000.0),
  Parameter('pC6_0', 10000.0),
])
```

Find rules with a forward rate < 1e-8, using a custom function:

```
>>> model.rules.filter(lambda c: c.rate_forward.value < 1e-8)
ComponentSet([
  Rule('bind_pC3_Apop', Apop(b=None) + pC3(b=None) | Apop(b=1) %
      pC3(b=1), kf25, kr25),
])
```

We can also use some built in predicates for more complex matching scenarios, including combining multiple predicates.

Find rules with a name beginning with “inhibit” that contain cSmac:

```
>>> model.rules.filter(Name('^inhibit') & Pattern(m.cSmac()))
ComponentSet([
  Rule('inhibit_cSmac_by_XIAP', cSmac(b=None) + XIAP(b=None) |
      cSmac(b=1) % XIAP(b=1), kf28, kr28),
])
```

Find rules with any form of Bax (i.e. Bax, aBax, mBax):

```
>>> model.rules.filter(Pattern(m.Bax) | Pattern(m.aBax) |
    ↪Pattern(m.MBax))
ComponentSet([
  Rule('bind_Bax_tBid', tBid(b=None) + Bax(b=None) |
      tBid(b=1) % Bax(b=1), kf12, kr12),
  Rule('produce_aBax_via_tBid', tBid(b=1) % Bax(b=1) >>
      tBid(b=None) + aBax(b=None), kc12),
  Rule('transloc_MBax_aBax', aBax(b=None) |
      MBax(b=None), kf13, kr13),
  Rule('inhibit_MBax_by_Bcl2', MBax(b=None) + Bcl2(b=None) |
      MBax(b=1) % Bcl2(b=1), kf14, kr14),
  Rule('dimerize_MBax_to_Bax2', MBax(b=None) + MBax(b=None) |
      Bax2(b=None), kf15, kr15),
])
```

Count the number of parameter that don't start with kf (note the ~ negation operator):

```
>>> len(model.parameters.filter(~Name('^kf')))
60
```

Get components not defined in this module (file). In this case, everything is defined in one file, but for multi-file models this becomes more useful:

```
>>> model.components.filter(~Module('^pysb.examples.earn_1_0$'))
ComponentSet([
])
```

Count the number of rules defined in the 'catalyze' function:

```
>>> len(model.rules.filter(Function('^catalyze$')))
24
```

get(*k*, *d*) → *D*[*k*] if *k* in *D*, else *d*. *d* defaults to None.

index(*value*, [*start*, *stop*]) → integer -- return first index of *value*.

Raises `ValueError` if the value is not present.

Supporting *start* and *stop* arguments is optional, but recommended.

items() → a set-like object providing a view on *D*'s items

keys() → a set-like object providing a view on *D*'s keys

rename(*c*, *new_name*)

Change the name of component *c* to *new_name*.

values() → an object providing a view on *D*'s values

exception `pysb.core.ConstantExpressionError`

Expected a constant Expression but got something else.

exception `pysb.core.DanglingBondError`

exception `pysb.core.DuplicateMonomerError`

exception `pysb.core.DuplicateSiteError`

class `pysb.core.EnergyPattern`(*name*, *pattern*, *energy*, *_export*=*True*)

Model component representing an energy pattern.

Parameters

pattern

[`ComplexPattern`] `ComplexPattern` describing the species to which the given *deltaG* in *energy* should be attributed.

energy

[`sympy.Expr`] Expression containing model parameters that defines the *deltaG* to be ascribed to the part of a species matched by *pattern*.

Attributes

Identical to Parameters (see above).

class `pysb.core.Expression`(*name*, *expr*, *_export*=*True*)

Model component representing a symbolic expression of other variables.

Parameters

expr

[`sympy.Expr`] Symbolic expression.

Attributes**expr**

[sympy.Expr] See Parameters.

expand_expr(*expand_observables=False*)

Return expr rewritten in terms of terminal symbols only.

is_constant_expression()

Return True if all terminal symbols are Parameters or numbers.

exception pysb.core.**ExpressionError**

Expected an Expression but got something else.

class pysb.core.**Initial**(*pattern, value, fixed=False, _export=True*)

An initial condition for a species.

An initial condition is made up of a species, its amount or concentration, and whether it is to be held fixed during a simulation.

Species patterns must satisfy all of the following: * Able to be cast as a ComplexPattern * Concrete (see ComplexPattern.is_concrete) * Distinct from any existing initial condition pattern * match_once is False (nonsensical in this context)

Parameters**pattern**

[ComplexPattern] A concrete pattern defining the species to initialize.

value

[Parameter or Expression Amount of the species the model will start] with. If an Expression is used, it must evaluate to a constant (can't reference any Observables).

fixed

[bool] Whether or not the species should be held fixed (never consumed).

Attributes

Identical to Parameters (see above).

class pysb.core.**InitialConditionsView**(*model*)

Compatibility shim for the Model.initial_conditions property.

exception pysb.core.**InvalidComplexPatternException**

Expression can not be cast as a ComplexPattern.

exception pysb.core.**InvalidComponentNameError**(*name*)

Inappropriate component name.

exception pysb.core.**InvalidInitialConditionError**

Invalid initial condition pattern.

exception pysb.core.**InvalidReactionPatternException**

Expression can not be cast as a ReactionPattern.

exception pysb.core.**InvalidReversibleSynthesisDegradationRule**

Synthesis or degradation rule defined as reversible.

`pysb.core.MatchOnce(pattern)`

Make a ComplexPattern match-once.

`MatchOnce` adjusts reaction rate multiplicity by only counting a pattern match once per species, even if it matches within that species multiple times.

For example, if one were to have molecules of `A` degrading with a specified rate:

```
>>> Rule('A_deg', A() >> None, kdeg)
```

In the situation where multiple molecules of `A()` were present in a species (e.g. `A(a=1) % A(a=1)`), the above `A_deg` rule would have multiplicity equal to the number of occurrences of `A()` in the degraded species. Thus, `A(a=1) % A(a=1)` would degrade twice as fast as `A(a=None)` under the above rule. If this behavior is not desired, the multiplicity can be fixed at one using the `MatchOnce` keyword:

```
>>> Rule('A_deg', MatchOnce(A()) >> None, kdeg)
```

class `pysb.core.Model(name=None, base=None, _export=True)`

A rule-based model containing monomers, rules, compartments and parameters.

Parameters

name

[string, optional] Name of the model. If not specified, will be set to the name of the file from which the constructor was called (with the `.py` extension stripped).

base

[Model, optional] If specified, the model will begin as a copy of *base*. This can be used to achieve a simple sort of model extension and enhancement.

Attributes

name

[string] Name of the model. See Parameter section above.

base

[Model or None] See Parameter section above.

monomers, compartments, parameters, rules, observables

[ComponentSet] The Component objects which make up the model.

initials

[list of Initial] Specifies which species are present in the model's starting state ($t=0$) and how much there is of each one.

initial_conditions

[list of tuple of (ComplexPattern, Parameter)] The old representation of initial conditions, deprecated in favor of *initials*.

species

[list of ComplexPattern] List of all complexes which can be produced by the model, starting from the initial conditions and successively applying the rules. Each `ComplexPattern` is concrete.

reactions

[list of dict] Structures describing each possible unidirectional reaction that can be produced by the model. Each structure stores the name of the rule that generated the reaction ('rule'), the mathematical expression for the rate of the reaction ('rate'), tuples of species indexes for the reactants and products ('reactants', 'products'), and a bool indicating whether the reaction is the reverse component of a bidirectional reaction ('reverse').

reactions_bidirectional

[list of dict] Similar to *reactions* but with only one entry for each bidirectional reaction. The fields are identical except 'reverse' is replaced by 'reversible', a bool indicating whether the reaction is reversible. The 'rate' is the forward rate minus the reverse rate.

annotations

[list of Annotation] Structured annotations of model components. See the Annotation class for details.

add_annotation(*annotation*)

Add an annotation to the model.

add_component(*other*)

Add a component to the model.

all_component_sets()

Return a list of all ComponentSet objects.

all_components()

Return a ComponentSet containing all components in the model.

enable_synth_deg()

Add components needed to support synthesis and degradation rules.

expressions_constant(*include_derived=False*)

Return a ComponentSet of constant expressions.

expressions_dynamic(*include_local=True, include_derived=False*)

Return a ComponentSet of non-constant expressions.

get_annotations(*subject*)

Return all annotations for the given subject.

get_species_index(*complex_pattern*)

Return the index of a species.

Parameters**complex_pattern**

[ComplexPattern] A concrete pattern specifying the species to find.

has_synth_deg()

Return true if model uses synthesis or degradation reactions.

initial(*pattern, value, fixed=False*)

Add an initial condition.

This method is deprecated. Instead, create an Initial object and pass it to add_initial.

property modules

Return the set of Python modules where Components are defined

Returns**list**

List of module names where model Components are defined

Examples

```
>>> from pysb.examples.earm_1_0 import model
>>> 'pysb.examples.earm_1_0' in model.modules
True
```

property odes

Return sympy Expressions for the time derivative of each species.

parameters_all()

Return a ComponentSet of all parameters and derived parameters.

parameters_compartments()

Return a ComponentSet of compartment size parameters.

parameters_expressions()

Return a ComponentSet of the parameters used in expressions.

parameters_initial_conditions()

Return a ComponentSet of initial condition parameters.

parameters_rules()

Return a ComponentSet of the parameters used in rules.

parameters_unused()

Return a ComponentSet of unused parameters.

reload()

Reload a model after its source files have been edited.

This method does not yet reload the model contents in-place, rather it returns a new model object. Thus the correct usage is `model = model.reload()`.

If the model script imports any modules, these will not be reloaded. Use python's `reload()` function to reload them.

reset_equations()

Clear out fields generated by `bng.generate_equations` or the like.

rules_energy()

Return a ComponentSet of energy-based rules.

property stoichiometry_matrix

Return the stoichiometry matrix for the reaction network.

update_initial_condition_pattern(*before_pattern*, *after_pattern*)

Update the pattern associated with an initial condition.

Leaves the Parameter object associated with the initial condition unchanged while modifying the pattern associated with that condition. For example this is useful for changing the state of a site on a monomer or complex associated with an initial condition without having to create an independent initial condition, and parameter, associated with that alternative state.

Parameters

before_pattern

[ComplexPattern] The concrete pattern specifying the (already existing) initial condition. If the model does not contain an initial condition for the pattern, a `ValueError` is raised.

after_pattern

[ComplexPattern] The concrete pattern specifying the new pattern to use to replace before_pattern.

property uses_energy

Return True if model uses energy features.

exception pysb.core.ModelExistsWarning

A second model was declared in a module that already contains one.

exception pysb.core.ModelNotDefinedError

SelfExporter method was called before a model was defined.

class pysb.core.Monomer(*name, sites=None, site_states=None, _export=True*)

Model component representing a protein or other molecule.

Parameters**sites**

[list of strings, optional] Names of the sites.

site_states

[dict of string => string, optional] Allowable states for sites. Keys are sites and values are lists of states. Sites which only take part in bond formation and never take on a state may be omitted.

Notes

A Monomer instance may be “called” like a function to produce a MonomerPattern, as syntactic sugar to approximate rule-based modeling language syntax. It is typically called with keyword arguments where the arg names are sites and values are site conditions such as bond numbers or states (see the Notes section of the [MonomerPattern](#) documentation for details). To help in situations where kwargs are unwieldy (for example if a site name is computed dynamically or stored in a variable) a dict following the same layout as the kwargs may be passed as the first and only positional argument instead.

Site names and state values must start with a letter, or one or more underscores followed by a letter. Any remaining characters must be alphanumeric or underscores.

Attributes

Identical to Parameters (see above).

class pysb.core.MonomerPattern(*monomer, site_conditions, compartment*)

A pattern which matches instances of a given monomer.

Parameters**monomer**

[Monomer] The monomer to match.

site_conditions

[dict] The desired state of the monomer’s sites. Keys are site names and values are described below in Notes.

compartment

[Compartment or None] The desired compartment where the monomer should exist. None means “don’t-care”.

Notes

The acceptable values in the *site_conditions* dict are as follows:

- **None** : no bond
- *str* : state
- *int* : a bond (to a site with the same number in a *ComplexPattern*)
- *list of int* : multi-bond (not valid in Kappa)
- **ANY** : “any” bond (bound to something, but don’t care what)
- **WILD** : “wildcard” bond (bound or not bound)
- *tuple of (str, int)* : state with specified bond
- *tuple of (str, WILD)* : state with wildcard bond
- *tuple of (str, ANY)* : state with any bond
- **MultiState** : duplicate sites

If a site is not listed in *site_conditions* then the pattern will match any state for that site, i.e. “don’t write, don’t care”.

Attributes

Identical to Parameters (see above).

is_concrete()

Return a bool indicating whether the pattern is ‘concrete’.

‘Concrete’ means the pattern satisfies ALL of the following:

1. All sites have specified conditions
2. If the model uses compartments, the compartment is specified.

is_site_concrete()

Return a bool indicating whether the pattern is ‘site-concrete’.

‘Site-concrete’ means all sites have specified conditions.

class pysb.core.MultiState(*args)

MultiState for a Monomer (also known as duplicate sites)

MultiStates are duplicate copies of a site which each have the same name and semantics. In BioNetGen, these are known as duplicate sites. MultiStates are not supported by Kappa.

When declared, a MultiState instance is not connected to any Monomer or site, so full validation is deferred until it is used as part of a *MonomerPattern* or *ComplexPattern*.

Examples

Define a Monomer “A” with MultiState “a”, which has two copies, and Monomer “B” with MultiState “b”, which also has two copies but can take state values “u” and “p”:

```
>>> Model()
<Model '_interactive_' (monomers: 0, ...
>>> Monomer('A', ['a', 'a']) # BNG: A(a, a)
Monomer('A', ['a', 'a'])
>>> Monomer('B', ['b', 'b'], {'b': ['u', 'p']}) # BNG: B(b~u~p, b~u~p)
Monomer('B', ['b', 'b'], {'b': ['u', 'p']})
```

To specify MultiStates, use the MultiState class. Here are some valid examples of MultiState patterns, with their BioNetGen equivalents:

```
>>> A(a=MultiState(1, 2)) # BNG: A(a!1,a!2)
A(a=MultiState(1, 2))
>>> B(b=MultiState('u', 'p')) # BNG: A(A~u,A~p)
B(b=MultiState('u', 'p'))
>>> A(a=MultiState(1, 2)) % B(b=MultiState(('u', 1), 2)) # BNG: A(a!1, a!2).B(b~u!
↪1, b~2)
A(a=MultiState(1, 2)) % B(b=MultiState(('u', 1), 2))
```

class pysb.core.Observable(name, reaction_pattern, match='molecules', _export=True)

Model component representing a linear combination of species.

Observables are useful in correlating model simulation results with experimental measurements. For example, an observable for “A()” will report on the total number of copies of Monomer A, regardless of what it’s bound to or the state of its sites. “A(y=’P’)” would report on all instances of A with site ‘y’ in state ‘P’.

Parameters

reaction_pattern

[ReactionPattern] The list of ComplexPatterns to match.

match

['species' or 'molecules'] Whether to match entire species ('species') or individual fragments ('molecules'). Default is 'molecules'.

Notes

ReactionPattern is used here as a container for a list of ComplexPatterns, solely so users could utilize the ComplexPattern ‘+’ operator overload as syntactic sugar. There are no actual “reaction” semantics in this context.

Attributes

reaction_pattern

[ReactionPattern] See Parameters.

match

['species' or 'molecules'] See Parameters.

species

[list of integers] List of species indexes for species matching the pattern.

coefficients

[list of integers] List of coefficients by which each species amount is to be multiplied to correct for multiple pattern matches within a species.

expand_obs()

Expand observables in terms of species and coefficients

class pysb.core.OdeView(*model*)

Compatibility shim for the Model.odes property.

class pysb.core.Parameter(*name*, *value=0.0*, *_export=True*, *nonnegative=True*, *integer=False*)

Model component representing a named constant floating point number.

Parameters are used as reaction rate constants, compartment volumes and initial (boundary) conditions for species.

Parameters**value**

[number, optional] The numerical value of the parameter. Defaults to 0.0 if not specified. The provided value is converted to a float before being stored, so any value that cannot be coerced to a float will trigger an exception.

nonnegative

[bool, optional] Sets the assumption whether this parameter is nonnegative (≥ 0). Affects simplifications of expressions that involve this parameter. By default, parameters are assumed to be non-negative.

integer

[bool, optional] Sets the assumption whether this parameter takes integer values, which affects simplifications of expressions that involve this parameter. By default, parameters are not assumed to take integer values.

Attributes

value (see Parameters above).

class pysb.core.ReactionPattern(*complex_patterns*)

A pattern for the entire product or reactant side of a rule.

Essentially a thin wrapper around a list of ComplexPatterns. In BNG terms, a list of complex patterns combined with the '+' operator.

Parameters**complex_patterns**

[list of ComplexPatterns] ComplexPatterns that make up the reaction pattern.

Attributes

Identical to Parameters (see above).

matches(*other*)

Match the 'other' ReactionPattern against this one

See [pysb.pattern.match_reaction_pattern\(\)](#) for details

exception pysb.core.RedundantSiteConditionsError

Both conditions dict and kwargs both passed to create pattern.

exception pysb.core.ReusedBondError

class pysb.core.Rule(*name*, *rule_expression*, *rate_forward*, *rate_reverse=None*, *delete_molecules=False*, *move_connected=False*, *energy=False*, *total_rate=False*, *_export=True*)

Model component representing a reaction rule.

Parameters

rule_expression

[RuleExpression] RuleExpression containing the essence of the rule (reactants, products, reversibility).

rate_forward

[Union[Parameter,Expression]] Forward reaction rate constant.

rate_reverse

[Union[Parameter,Expression], optional] Reverse reaction rate constant (only required for reversible rules).

delete_molecules

[bool, optional] If True, deleting a Monomer from a species is allowed to fragment the species into multiple pieces (if the deleted Monomer was the sole link between those pieces). If False (default) then fragmentation is disallowed and the rule will not match a reactant species if applying the rule would fragment a species.

move_connected

[bool, optional] If True, a rule that transports a Monomer between compartments will co-transport anything connected to that Monomer by a path in the same compartment. If False (default), connected Monomers will remain where they were.

energy

[bool, optional] If True, this rule is an energy rule (as in Energy BNG) and the two parameters are interpreted as the ‘phi’ and deltaG parameters of the Arrhenius equation (see Hogg 2013 for details).

total_rate: bool, optional

If True, the rate is considered to be macroscopic and is not multiplied by the number of reactant molecules during simulation. If False (default), the rate is multiplied by number of reactant molecules. Keyword is used by BioNetGen only for simulations using NFsim. Keyword is ignored by generate_network command of BioNetGen.

Attributes

Identical to Parameters (see above), plus the component elements of
‘rule_expression’: reactant_pattern, product_pattern and is_reversible.

is_deg()

Return a bool indicating whether this is a degradation rule.

is_synth()

Return a bool indicating whether this is a synthesis rule.

class pysb.core.RuleExpression(*reactant_pattern, product_pattern, is_reversible*)

A container for the reactant and product patterns of a rule expression.

Contains one ReactionPattern for each of reactants and products, and a bool indicating reversibility. This is a temporary object used to implement syntactic sugar through operator overloading. The Rule constructor takes an instance of this class as its first argument, but simply extracts its fields and discards the object itself.

Parameters**reactant_pattern, product_pattern**

[ReactionPattern] The reactants and products of the rule.

is_reversible

[bool] If True, the reaction is reversible. If False, it’s irreversible.

Attributes

Identical to Parameters (see above).

class pysb.core.SelfExporter

Make model components appear in the calling module's namespace.

This class is for pysb internal use only. Do not construct any instances.

static add_initial(*initial*)

Add an Initial to the default model.

static cleanup()

Delete previously exported symbols.

static export(*obj*)

Export an object by name and add it to the default model.

static rename(*obj*, *new_name*)

Rename a previously exported symbol

exception pysb.core.SymbolExistsWarning

A component declaration or rename overwrote an existing symbol.

class pysb.core.Tag(*name*, *_export=True*)

Tag for labelling MonomerPatterns and ComplexPatterns

exception pysb.core.TagAlreadySpecifiedError**exception pysb.core.UnknownSiteError****class pysb.core.WILD**

Site may be bound or unbound.

Use WILD as part of a (state, WILD) tuple in a MonomerPattern site_conditions dict to indicate that a site must have the given state, irrespective of the presence or absence of a bond. (Specifying only the state implies there must not be a bond). A bare WILD in a site_conditions dict is also permissible, but as this has the same meaning as the much simpler option of leaving the given site out of the dict entirely, this usage is deprecated.

Equivalent to the “?” bond modifier in BNG.

pysb.core.as_complex_pattern(*v*)

Internal helper to ‘upgrade’ a MonomerPattern to a ComplexPattern.

pysb.core.as_reaction_pattern(*v*)

Internal helper to ‘upgrade’ a Complex- or MonomerPattern or None to a complete ReactionPattern.

pysb.core.build_rule_expression(*reactant*, *product*, *is_reversible*)

Internal helper for operators which return a RuleExpression.

pysb.core.extract_site_conditions(*conditions=None*, ***kwargs*)

Parse MonomerPattern/ComplexPattern site conditions.

pysb.core.is_state_bond_tuple(*state*)

Check the argument is a (state, bond) tuple for a Monomer site

pysb.core.validate_const_expr(*obj*, *description*)

Raises an exception if the argument is not a constant expression.

pysb.core.validate_expr(*obj*, *description*)

Raises an exception if the argument is not an expression.

4.2 ODE integrators (pysb.integrate)

```
class pysb.integrate.Solver(model, tspan, use_analytic_jacobian=False, integrator='vode', cleanup=True,  
                           verbose=False, **integrator_options)
```

An interface for numeric integration of models.

Parameters

model

[pysb.Model] Model to integrate.

tspan

[vector-like] Time values over which to integrate. The first and last values define the time range, and the returned trajectories will be sampled at every value.

use_analytic_jacobian

[boolean, optional] Whether to provide the solver a Jacobian matrix derived analytically from the model ODEs. Defaults to False. If False, the integrator may approximate the Jacobian by finite-differences calculations when necessary (depending on the integrator and settings).

integrator

[string, optional (default: 'vode')] Name of the integrator to use, taken from the list of integrators known to `scipy.integrate.ode`.

cleanup

[bool, optional] If True (default), delete the temporary files after the simulation is finished. If False, leave them in place. Useful for debugging.

verbose

[bool, optional (default: False)] Verbose output

integrator_options

Additional parameters for the integrator.

Notes

The expensive step of generating the code for the right-hand side of the model's ODEs is performed during initialization. If you need to integrate the same model repeatedly with different parameters then you should build a single Solver object and then call its `run` method as needed.

Attributes

model

[pysb.Model] Model passed to the constructor

tspan

[vector-like] Time values passed to the constructor.

y

[numpy.ndarray] Species trajectories. Dimensionality is `(len(tspan), len(model.species))`.

yobs

[numpy.ndarray with record-style data-type] Observable trajectories. Length is `len(tspan)` and record names follow `model.observables` names.

yobs_view

[numpy.ndarray] An array view (sharing the same data buffer) on `yobs`. Dimensionality is `(len(tspan), len(model.observables))`.

yexpr

[numpy.ndarray with record-style data-type] Expression trajectories. Length is `len(tspan)` and record names follow `model.expressions_dynamic()` names.

yexpr_view

[numpy.ndarray] An array view (sharing the same data buffer) on `yexpr`. Dimensionality is `(len(tspan), len(model.expressions_dynamic()))`.

integrator

[`scipy.integrate.ode`] Integrator object.

run(*param_values=None, y0=None*)

Perform an integration.

Returns nothing; access the Solver object's `y`, `yobs`, or `yobs_view` attributes to retrieve the results.

Parameters**param_values**

[vector-like or dictionary, optional] Values to use for every parameter in the model. Ordering is determined by the order of `model.parameters`. If passed as a dictionary, keys must be parameter names. If not specified, parameter values will be taken directly from `model.parameters`.

y0

[vector-like, optional] Values to use for the initial condition of all species. Ordering is determined by the order of `model.species`. If not specified, initial conditions will be taken from `model.initials` (with initial condition parameter values taken from *param_values* if specified).

`pysb.integrate.odesolve(model, tspan, param_values=None, y0=None, integrator='vode', cleanup=True, verbose=False, **integrator_options)`

Integrate a model's ODEs over a given timespan.

This is a simple function-based interface to integrating (a.k.a. solving or simulating) a model. If you need to integrate a model repeatedly with different parameter values or initial conditions (as in parameter estimation), using the Solver class directly will provide much better performance.

Parameters**model**

[`pysb.Model`] Model to integrate.

tspan

[vector-like] Time values over which to integrate. The first and last values define the time range, and the returned trajectories will be sampled at every value.

param_values

[vector-like, optional] Values to use for every parameter in the model. Ordering is determined by the order of `model.parameters`. If not specified, parameter values will be taken directly from `model.parameters`.

y0

[vector-like, optional] Values to use for the initial condition of all species. Ordering is determined by the order of `model.species`. If not specified, initial conditions will be taken from `model.initials` (with initial condition parameter values taken from *param_values* if specified).

integrator

[string, optional] Name of the integrator to use, taken from the list of integrators known to `scipy.integrate.ode`.

cleanup

[bool, optional] Remove temporary files after completion if True. Set to False for debugging purposes.

verbose

[bool, optional] Increase verbosity of simulator output.

integrator_options

Additional parameters for the integrator.

Returns**yfull**

[record array] The trajectories calculated by the integration. The first dimension is time and its length is identical to that of *tspan*. The second dimension is species/observables and its length is the sum of the lengths of *model.species* and *model.observables*. The dtype of the array specifies field names: `'__s0'`, `'__s1'`, etc. for the species and observable names for the observables. See Notes below for further explanation and caveats.

Notes

This function was the first implementation of integration support and accordingly it has a few warts:

- It performs expensive code generation every time it is called.
- The returned array, with its record-style data-type, allows convenient selection of individual columns by their field names, but does not permit slice ranges or indexing by integers for columns. If you only need access to your model's observables this is usually not a problem, but sometimes it's more convenient to have a "regular" array. See Examples below for code to do this.

The actual integration code has since been moved to the Solver class and split up such that the code generation is only performed on initialization. The model may then be integrated repeatedly with different parameter values or initial conditions with much better performance. Additionally, Solver makes the species trajectories available as a simple array and only uses the record array for the observables where it makes sense.

This function now simply serves as a wrapper for creating a Solver object, calling its run method, and building the record array to return.

Examples

Simulate a model and display the results for an observable:

```
>>> from pysb.examples.robertson import model
>>> from numpy import linspace
>>> numpy.set_printoptions(precision=4)
>>> yfull = odesolve(model, linspace(0, 40, 10))
>>> print(yfull['A_total'])
[1.      0.899   0.8506  0.8179  0.793    0.7728  0.7557  0.7408  0.7277
 0.7158]
```

Obtain a view on a returned record array which uses an atomic data-type and integer indexing (note that the view's data buffer is shared with the original array so there is no extra memory cost):

```
>>> yfull.shape == (10, )
True
>>> print(yfull.dtype)
```

(continues on next page)

(continued from previous page)

```
[('__s0', '<f8'), ('__s1', '<f8'), ('__s2', '<f8'), ('A_total', '<f8'),
('B_total', '<f8'), ('C_total', '<f8')]
>>> print(yfull[0:4, 1:3])
Traceback (most recent call last):
...
IndexError: too many indices...
>>> yarray = yfull.view(float).reshape(len(yfull), -1)
>>> yarray.shape == (10, 6)
True
>>> print(yarray.dtype)
float64
>>> print(yarray[0:4, 1:3])
[[0.00000e+00  0.00000e+00]
 [2.1672e-05  1.0093e-01]
 [1.6980e-05  1.4943e-01]
 [1.4502e-05  1.8209e-01]]
```

4.3 Simulation tools (pysb.simulator)

class pysb.simulator.**BngSimulator**(*model*, *tspan=None*, *initials=None*, *param_values=None*, *cleanup=True*, *verbose=False*)

Simulate a model using BioNetGen

run(*tspan=None*, *initials=None*, *param_values=None*, *n_runs=1*, *method='ssa'*, *output_dir=None*, *output_file_basename=None*, *cleanup=None*, *population_maps=None*, ***additional_args*)

Simulate a model using BioNetGen

Parameters

tspan: vector-like

time span of simulation

initials: vector-like, optional

initial conditions of model

param_values

[vector-like or dictionary, optional] Values to use for every parameter in the model. Ordering is determined by the order of model.parameters. If not specified, parameter values will be taken directly from model.parameters.

n_runs: int

number of simulations to run

method

[str] Type of simulation to run. Must be one of:

- 'ssa' - Stochastic Simulation Algorithm (direct method with propensity sorting)
- 'nf' - Stochastic network free simulation with NFsim. Performs Hybrid Particle/Population simulation if population_maps argument is supplied
- 'pla' - Partitioned-leaping algorithm (variant of tau-leaping algorithm)
- 'ode' - ODE simulation (Sundials CVODE algorithm)

output_dir

[string, optional] Location for temporary files generated by BNG. If None (the default), uses a temporary directory provided by the system. A temporary directory with a random name is created within the supplied location.

output_file_basename

[string, optional] This argument is used as a prefix for the temporary BNG output directory, rather than the individual files.

cleanup

[bool, optional] If True (default), delete the temporary files after the simulation is finished. If False, leave them in place (Useful for debugging). The default value, None, means to use the value specified in `__init__()`.

population_maps: list of PopulationMap

List of [PopulationMap](#) objects for hybrid particle/population modeling. Only used when `method='nf'`.

additional_args: kwargs, optional

Additional arguments to pass to BioNetGen

Examples

Simulate a model using network free simulation (NFsim):

```
>>> from pysb.examples import robertson
>>> from pysb.simulator.bng import BngSimulator
>>> model = robertson.model
>>> sim = BngSimulator(model, tspan=np.linspace(0, 1))
>>> x = sim.run(n_runs=1, method='nf')
```

```
class pysb.simulator.CudaSSASimulator(model, verbose=False, tspan=None, precision=<MagicMock
name='mock.float64' id='140603275922640'>, **kwargs)
```

SSA simulator for NVIDIA gpus

Use `CUDA_VISIBLE_DEVICES` to set the device.

Requires [PyCUDA](#), [CUDA](#), and a CUDA compatible NVIDIA gpu.

Parameters**model**

[pysb.Model] Model to simulate.

tspan

[vector-like, optional] Time values over which to simulate. The first and last values define the time range. Returned trajectories are sampled at every value unless the simulation is interrupted for some reason, e.g., due to satisfaction of a logical stopping criterion (see ‘tout’ below).

initials

[vector-like or dict, optional] Values to use for the initial condition of all species. Ordering is determined by the order of `model.species`. If not specified, initial conditions will be taken from `model.initial_conditions` (with initial condition parameter values taken from `param_values` if specified).

param_values

[vector-like or dict, optional] Values to use for every parameter in the model. Ordering is de-

terminated by the order of `model.parameters`. If passed as a dictionary, keys must be parameter names. If not specified, parameter values will be taken directly from `model.parameters`.

verbose

[bool, optional (default: False)] Verbose output.

precision

[(np.float64, np.float32)] Precision for ssa simulation. Default is np.float64. float32 should be used with caution.

Attributes**verbose: bool**

Verbosity flag passed to the constructor.

model

[pysb.Model] Model passed to the constructor.

tspan

[vector-like] Time values passed to the constructor.

run(*tspan=None, param_values=None, initials=None, number_sim=0, threads_per_block=None, random_seed=None*)

Run a simulation and returns the result (trajectories)

Note: In early versions of the Simulator class, `tspan`, `initials` and `param_values` supplied to this method persisted to future `run()` calls. This is no longer the case.

Parameters**tspan****initials****param_values**

See parameter definitions in [ScipyOdeSimulator](#).

number_sim: int

Number of simulations to perform

threads_per_block: int

Number of threads per block. Optimal value is generally 32

random_seed: int

Seed used for generate random numbers that will then be seeds on the device (seed of seeds).

Returns

A :class:`SimulationResult` object

class `pysb.simulator.CupSodaSimulator`(*model, tspan=None, initials=None, param_values=None, verbose=False, **kwargs*)

An interface for running cupSODA, a CUDA implementation of LSODA.

cupSODA is a graphics processing unit (GPU)-based implementation of the LSODA simulation algorithm (see references). It requires an NVIDIA GPU card with support for the CUDA framework version 7 or above. Further details of cupSODA and software can be found on github: <https://github.com/aresio/cupSODA>

The simplest way to install cupSODA is to use a pre-compiled version, which can be downloaded from here: <https://github.com/aresio/cupSODA/releases>

Parameters

model

[pysb.Model] Model to integrate.

tspan

[vector-like, optional] Time values at which the integrations are sampled. The first and last values define the time range.

initials

[list-like, optional] Initial species concentrations for all simulations. Dimensions are N_SIMS x number of species.

param_values

[list-like, optional] Parameters for all simulations. Dimensions are N_SIMS x number of parameters.

verbose

[bool or int, optional] Verbosity level, see `pysb.simulator.base.Simulator` for further details.

****kwargs: dict, optional**

Extra keyword arguments, including:

- **gpu**: Index of GPU to run on (default: 0)
- **vol**: System volume; required if model encoded in extrinsic (number) units (default: None)
- **obs_species_only**: Only output species contained in observables (default: True)
- **cleanup**: Delete all temporary files after the simulation is finished. Includes both BioNet-Gen and cupSODA files. Useful for debugging (default: True)
- **prefix**: Prefix for the temporary directory containing cupSODA input and output files (default: model name)
- **base_dir**: Directory in which temporary directory with cupSODA input and output files are placed (default: system directory determined by `tempfile.mkdtemp`)
- **integrator**: Name of the integrator to use; see `default_integrator_options` (default: 'cupsoda')
- **integrator_options**: A dictionary of keyword arguments to supply to the integrator; see `default_integrator_options`.

Notes

1. If *vol* is defined, species amounts and rate constants are assumed to be in number units and are automatically converted to concentration units before generating the cupSODA input files. The species concentrations returned by cupSODA are converted back to number units during loading.
2. If *obs_species_only* is True, only the species contained within observables are output by cupSODA. All other concentrations are set to 'nan'.

References

1. Harris, L.A., Nobile, M.S., Pino, J.C., Lubbock, A.L.R., Besozzi, D., Mauri, G., Cazzaniga, P., and Lopez, C.F. 2017. GPU-powered model analysis with PySB/cupSODA. *Bioinformatics* 33, pp.3492-3494.
2. Nobile M.S., Cazzaniga P., Besozzi D., Mauri G., 2014. GPU-accelerated simulations of mass-action kinetics models with cupSODA, *Journal of Supercomputing*, 69(1), pp.17-24.
3. Petzold, L., 1983. Automatic selection of methods for solving stiff and nonstiff systems of ordinary differential equations. *SIAM journal on scientific and statistical computing*, 4(1), pp.136-148.

Attributes

model

[pysb.Model] Model passed to the constructor.

tspan

[numpy.ndarray] Time values passed to the constructor.

initials

[numpy.ndarray] Initial species concentrations for all simulations. Dimensions are number of simulations x number of species.

param_values

[numpy.ndarray] Parameters for all simulations. Dimensions are number of simulations x number of parameters.

verbose: bool or int

Verbosity setting. See the base class `pysb.simulator.base.Simulator` for further details.

gpu

[int or list] Index of GPU being run on, or a list of integers to use multiple GPUs. Simulations will be split equally among the of GPUs.

outdir

[str] Directory where cupSODA output files are placed. Input files are also placed here.

opts: dict

Dictionary of options for the integrator, which can include the following:

- **vol** (float or None): System volume
- **n_blocks** (int or None): Number of GPU blocks used by the simulator
- **atol** (float): Absolute integrator tolerance
- **rtol** (float): Relative integrator tolerance
- **chunksize** (int or None): The maximum number of simulations to run per GPU at one time. Set this option if your GPU is running out of memory.
- **memory_usage** ('global', 'shared', or 'sharedconstant'): The type of GPU memory to use
- **max_steps** (int): The maximum number of internal integrator iterations (equivalent to LSODA's mxstep)

integrator

[str] Name of the integrator in use (only "cupsoda" is supported).

run(*tspan=None, initials=None, param_values=None*)

Perform a set of integrations.

Returns a *SimulationResult* object.

Parameters

tspan

[list-like, optional] Time values at which the integrations are sampled. The first and last values define the time range.

initials

[list-like, optional] Initial species concentrations for all simulations. Dimensions are number of simulation x number of species.

param_values

[list-like, optional] Parameters for all simulations. Dimensions are number of simulations x number of parameters.

Returns

A *SimulationResult* object

Notes

1. An exception is thrown if *tspan* is not defined in either `__init__` or `run`.
2. If neither *initials* nor *param_values* are defined in either `__init__` or `run` a single simulation is run with the initial concentrations and parameter values defined in the model.

class `pysb.simulator.KappaSimulator`(*model, tspan=None, cleanup=True, verbose=False*)

Simulate a model using Kappa

run(*tspan=None, initials=None, param_values=None, n_runs=1, output_dir=None, output_file_basename=None, cleanup=None, **additional_args*)

Simulate a model using Kappa

Parameters

tspan: vector-like

time span of simulation

initials: vector-like, optional

initial conditions of model

param_values

[vector-like or dictionary, optional] Values to use for every parameter in the model. Ordering is determined by the order of `model.parameters`. If not specified, parameter values will be taken directly from `model.parameters`.

n_runs: int

number of simulations to run

output_dir

[string, optional] Location for temporary files generated by Kappa. If None (the default), uses a temporary directory provided by the system. A temporary directory with a random name is created within the supplied location.

output_file_basename

[string, optional] This argument is used as a prefix for the temporary Kappa output directory, rather than the individual files.

cleanup

[bool, optional] If True (default), delete the temporary files after the simulation is finished. If False, leave them in place (Useful for debugging). The default value, None, means to use the value specified in `__init__()`.

additional_args: kwargs, optional

Additional arguments to pass to Kappa

- **seed**

[int, optional] Random number seed for Kappa simulation

- **perturbation**

[string, optional] Optional perturbation language syntax to be appended to the Kappa file. See KaSim manual for more details.

Examples

```
>>> import numpy as np
>>> from pysb.examples import michment
>>> from pysb.simulator import KappaSimulator
>>> sim = KappaSimulator(michment.model, tspan=np.linspace(0, 1))
>>> x = sim.run(n_runs=1)
```

```
class pysb.simulator.OpenCLSSASimulator(model, verbose=False, tspan=None, precision=<MagicMock
name='mock.float64' id='140603275922640'>, **kwargs)
```

OpenCL SSA simulator

This simulator is capable of using either a GPU or multi-core CPU. The simulator will detect and ask which device you would like to use. Alternatively, you can set the device using with an environment variable `PYOPENCL_CTX`

Requires [OpenCL](#) and [PyOpenCL](#).

Parameters**model**

[pysb.Model] Model to simulate.

tspan

[vector-like, optional] Time values over which to simulate. The first and last values define the time range. Returned trajectories are sampled at every value unless the simulation is interrupted for some reason, e.g., due to satisfaction of a logical stopping criterion (see ‘tout’ below).

initials

[vector-like or dict, optional] Values to use for the initial condition of all species. Ordering is determined by the order of `model.species`. If not specified, initial conditions will be taken from `model.initial_conditions` (with initial condition parameter values taken from `param_values` if specified).

param_values

[vector-like or dict, optional] Values to use for every parameter in the model. Ordering is determined by the order of `model.parameters`. If passed as a dictionary, keys must be parameter names. If not specified, parameter values will be taken directly from `model.parameters`.

verbose

[bool, optional (default: False)] Verbose output.

precision

[(np.float64, np.float32)] Precision for ssa simulation. Default is np.float64. float32 should be used with caution.

Attributes**verbose: bool**

Verbosity flag passed to the constructor.

model

[pysb.Model] Model passed to the constructor.

tspan

[vector-like] Time values passed to the constructor.

run(*tspan=None, param_values=None, initials=None, number_sim=0, random_seed=0*)

Run a simulation and returns the result (trajectories)

Note: In early versions of the Simulator class, *tspan*, *initials* and *param_values* supplied to this method persisted to future *run()* calls. This is no longer the case.

Parameters**tspan****initials****param_values**

See parameter definitions in *ScipyOdeSimulator*.

number_sim: int

Number of simulations to perform

random_seed: int

Seed used for random numbers to be passed to device.

Returns

A *SimulationResult* object

class pysb.simulator.**PopulationMap**(*complex_pattern, lumping_rate, counter_species=None*)

Population map for BioNetGen hybrid particle/population simulation

For use with the *BngSimulator*.

References

Hogg et al. 2014: <http://journals.plos.org/ploscompbiol/article?id=10.1371/journal.pcbi.1003544>

BioNetGen HPP documentation: http://bionetgen.org/index.php/Hybrid_particle-population_model_generator

class pysb.simulator.**ScipyOdeSimulator**(*model, tspan=None, initials=None, param_values=None, verbose=False, **kwargs*)

Simulate a model using SciPy ODE integration

Uses `scipy.integrate.odeint()` for the lsoda integrator, `scipy.integrate.ode()` for all other integrators.

Warning: The interface for this class is considered experimental and may change without warning as PySB is updated.

Parameters

model

[pysb.Model] Model to simulate.

tspan

[vector-like, optional] Time values over which to simulate. The first and last values define the time range. Returned trajectories are sampled at every value unless the simulation is interrupted for some reason, e.g., due to satisfaction of a logical stopping criterion (see ‘tout’ below).

initials

[vector-like or dict, optional] Values to use for the initial condition of all species. Ordering is determined by the order of `model.species`. If not specified, initial conditions will be taken from `model.initials` (with initial condition parameter values taken from *param_values* if specified).

param_values

[vector-like or dict, optional] Values to use for every parameter in the model. Ordering is determined by the order of `model.parameters`. If passed as a dictionary, keys must be parameter names. If not specified, parameter values will be taken directly from `model.parameters`.

verbose

[bool or int, optional (default: False)] Sets the verbosity level of the logger. See the logging levels and constants from Python’s logging module for interpretation of integer values. False is equal to the PySB default level (currently WARNING), True is equal to DEBUG.

****kwargs**

[dict] Extra keyword arguments, including:

- **integrator**: Choice of integrator, including `vode` (default), `zvode`, `lsoda`, `dopri5` and `dop853`. See `scipy.integrate.ode()` for further information.
- **integrator_options**: A dictionary of keyword arguments to supply to the integrator. See `scipy.integrate.ode()`.
- **compiler**: Choice of compiler for ODE system: `cython`, or `python`. Leave unspecified or equal to `None` for auto-select (tries `cython`, then `python`). Cython compiles the equation system into C code. Python is the slowest but most compatible.
- **cleanup**: Boolean, whether to delete temporary files.

Notes

If `tspan` is not defined, it may be defined in the call to the `run` method.

Examples

Simulate a model and display the results for an observable:

```
>>> from pysb.examples.robertson import model
>>> import numpy as np
>>> np.set_printoptions(precision=4)
>>> sim = ScipyOdeSimulator(model, tspan=np.linspace(0, 40, 10))
>>> simulation_result = sim.run()
>>> print(simulation_result.observables['A_total'])
[1.      0.899  0.8506 0.8179 0.793  0.7728 0.7557 0.7408 0.7277
 0.7158]
```

For further information on retrieving trajectories (species, observables, expressions over time) from the `simulation_result` object returned by `run()`, see the examples under the [SimulationResult](#) class.

run(*tspan=None, initials=None, param_values=None, num_processors=1*)

Run a simulation and returns the result (trajectories)

Note: In early versions of the Simulator class, `tspan`, `initials` and `param_values` supplied to this method persisted to future `run()` calls. This is no longer the case.

Parameters

tspan

initials

param_values

See parameter definitions in [ScipyOdeSimulator](#).

num_processors

[int] Number of processes to use (default: 1). Set to a larger number (e.g. the number of CPU cores available) for parallel execution of simulations. This is only useful when simulating with more than one set of initial conditions and/or parameters.

Returns

A [SimulationResult](#) object

```
class pysb.simulator.SimulationResult(simulator, tout, trajectories=None,
                                       observables_and_expressions=None, squeeze=True,
                                       simulations_per_param_set=1, model=None, initials=None,
                                       param_values=None)
```

Results of a simulation with properties and methods to access them.

Warning: Please note that the interface for this class is considered experimental and may change without warning as PySB is updated.

Parameters

simulator

[Simulator] The simulator object that generated the trajectories

tout: list-like

Time points returned by the simulator (may be different from `tspan` if simulation is interrupted for some reason).

trajectories

[list or `numpy.ndarray`] A set of species trajectories from a simulation. Should either be a list of 2D numpy arrays or a single 3D numpy array.

squeeze

[bool, optional (default: True)] Return trajectories as a 2D array, rather than a 3d array, if only a single simulation was performed.

simulations_per_param_set

[int] Number of trajectories per parameter set. Typically always 1 for deterministic simulators (e.g. ODE), but with stochastic simulators multiple trajectories per parameter/initial condition set are often desired.

model: pysb.Model**initials: numpy.ndarray****param_values: numpy.ndarray**

`model`, `initials`, `param_values` are an alternative constructor mechanism used when loading `SimulationResults` from files (see `SimulationResult.load()`). Setting just the simulator argument instead of these arguments is recommended.

Notes

In the attribute descriptions, a “trajectory set” is a 2D numpy array, species on first axis and time on second axis, with each element containing the concentration or count of the species at the specified time.

A list of trajectory sets contains a trajectory set for each simulation.

Examples

The following examples use a simple model with three observables and one expression, with a single simulation.

```
>>> from pysb.examples.expression_observables import model
>>> from pysb.simulator import ScipyOdeSimulator
>>> import numpy as np
>>> np.set_printoptions(precision=4)
>>> sim = ScipyOdeSimulator(model, tspan=np.linspace(0, 40, 10),
    integrator_options={'atol': 1e-20})
>>> simulation_result = sim.run()
```

`simulation_result` is a `SimulationResult` object. An observable can be accessed like so:

```
>>> print(simulation_result.observables['Bax_c0'])
[1.00000e+00  1.1744e-02  1.3791e-04  1.6196e-06  1.9020e-08
 2.2337e-10  2.6232e-12  3.0806e-14  3.6178e-16  4.2492e-18]
```

It is also possible to retrieve the value of all observables at a particular time point, e.g. the final concentrations:

```
>>> print(simulation_result.observables[-1])
(4.2492e-18, 1.6996e-16, 1.)
```

Expressions are read in the same way as observables:

```
>>> print(simulation_result.expressions['NBD_signal'])
[0.  4.7847  4.9956  4.9999  5.   5.   5.   5.   5.   5. ]
```

The species trajectories can be accessed as a numpy ndarray:

```
>>> print(simulation_result.species)
[[1.00000e+00  0.00000e+00  0.00000e+00]
 [1.1744e-02  5.2194e-02  9.3606e-01]
 [1.3791e-04  1.2259e-03  9.9864e-01]
 [1.6196e-06  2.1595e-05  9.9998e-01]
 [1.9020e-08  3.3814e-07  1.00000e+00]
 [2.2337e-10  4.9637e-09  1.00000e+00]
 [2.6232e-12  6.9951e-11  1.00000e+00]
 [3.0806e-14  9.5840e-13  1.00000e+00]
 [3.6178e-16  1.2863e-14  1.00000e+00]
 [4.2492e-18  1.6996e-16  1.00000e+00]]
```

Species, observables and expressions can be combined into a single numpy ndarray and accessed similarly. Here, the initial concentrations of all these entities are examined:

```
>>> print(simulation_result.all[0])
( 1.,  0.,  0.,  1.,  0.,  0.,  0.)
```

The `all` array can be accessed as a pandas DataFrame object, which allows for more convenient indexing and access to pandas advanced functionality, such as indexing and slicing. Here, the concentrations of the observable `Bax_c0` and the expression `NBD_signal` are read at time points between 5 and 15 seconds:

```
>>> df = simulation_result.dataframe
>>> print(df.loc[5:15, ['Bax_c0', 'NBD_signal']])
      Bax_c0  NBD_signal
time
8.888889    0.000138    4.995633
13.333333    0.000002    4.999927
```

property `all`

Aggregate species, observables, and expressions trajectories into a numpy.ndarray with record-style data-type for return to the user.

property `dataframe`

A conversion of the trajectory sets (species, observables and expressions for all simulations) into a single pandas.DataFrame.

property `expressions`

List of trajectory sets. The first dimension contains expressions.

classmethod `load(filename, dataset_name=None, group_name=None)`

Load a SimulationResult from a file (HDF5 format)

For a description of the file format see [save\(\)](#)

Parameters

filename: str

Filename from which to load data

dataset_name: str or None

Dataset name. Can be left as None when the group specified only contains one dataset,

which will then be selected. If None and more than one dataset is in the group, a ValueError is raised.

group_name: str or None

Group name. This is typically the name of the model. Can be left as None when the file only contains one group, which will then be selected. If None and more than group is in the file a ValueError is raised.

Returns

SimulationResult

Set of trajectories and associated metadata loaded from the file

property nsims

The number of simulations in this SimulationResult

observable(pattern)

Calculate a pattern's trajectories without adding to model

This method calculates an observable “on demand” using any supplied MonomerPattern or ComplexPattern against the simulation result, without re-running the simulation.

Note that the monomers within the supplied pattern are reconciled with the SimulationResult's internal copy of the model by name. This method only works on simulations which calculate species trajectories (i.e. it will not work on network-free simulations).

Raises a ValueError if the pattern does not match at least one species.

Parameters

pattern: pysb.MonomerPattern or pysb.ComplexPattern

An observable pattern to match

Returns

pandas.Series

Series containing the simulation trajectories for the specified observable

Examples

```
>>> from pysb import ANY
>>> from pysb.examples import earm_1_0
>>> from pysb.simulator import ScipyOdeSimulator
>>> simres = ScipyOdeSimulator(earm_1_0.model, tspan=range(5)).run()
>>> m = earm_1_0.model.monomers
```

Observable of bound Bid:

```
>>> simres.observable(m.Bid(b=ANY))
time
0    0.000000e+00
1    1.190933e-12
2    2.768582e-11
3    1.609716e-10
4    5.320530e-10
dtype: float64
```

Observable of AMito bound to mCytoC:

```
>>> simres.observable(m.AMito(b=1) % m.mCytoC(b=1))
time
0      0.000000e+00
1      1.477319e-77
2      1.669917e-71
3      5.076939e-69
4      1.157400e-66
dtype: float64
```

property observables

List of trajectory sets. The first dimension contains observables.

save(filename, dataset_name=None, group_name=None, append=False, include_obs_exprs=False)

Save a SimulationResult to a file (HDF5 format)

HDF5 is a hierarchical, binary storage format well suited to storing matrix-like data. Our implementation requires the h5py package.

Each SimulationResult is treated as an HDF5 dataset, stored within a group which is specific to a model. In this way, it is possible to save multiple SimulationResults for a specific model.

A group is first created in the HDF file root (see group_name argument). Within that group, a dataset “_model” has a JSON version of the PySB model. SimulationResult are stored as groups within the model group.

The file hierarchy under group_name/dataset_name/ then consists of the following HDF5 gzip compressed HDF5 datasets: trajectories, param_values, initials, tout, observables (optional) and expressions (optional); and the following attributes: simulator_class (pickled Class), simulator_kwargs (pickled dict), squeeze (bool), simulations_per_param_set (int), pysb_version (str), timestamp (ISO 8601 format).

Custom attributes can be stored in the SimulationResult’s *custom_attrs* dictionary. Keys should be strings, values can be any picklable object. When saved to HDF5, these custom attributes will be prefixed with *usrattr_*.

Parameters

filename: str

Filename to which the data will be saved

dataset_name: str or None

Dataset name. If None, it will default to ‘result’. If the dataset_name already exists within the group, a ValueError is raised.

group_name: str or None

Group name. If None, will default to the name of the model.

append: bool

If False, raise IOError if the specified file already exists. If True, append to existing file (or create if it doesn’t exist).

include_obs_exprs: bool

Whether to save observables and expressions in the file or not. If they are not included, they can be recreated from the model and species trajectories when loaded back into PySB, but you may wish to include them for use with external software, or if you have complex expressions which take a long time to compute.

property species

List of trajectory sets. The first dimension contains species.


```
class pysb.simulator.StochKitSimulator(model, tspan=None, initials=None, param_values=None,
                                       verbose=False, **kwargs)
```

Interface to the StochKit 2 stochastic simulation toolkit

StochKit can be installed from GitHub: <https://github.com/stochss/stochkit>

This class is inspired by the *gillespy* <<https://github.com/JohnAbel/gillespy>> library, but has been optimised for use with PySB.

Warning: The interface for this class is considered experimental and may change without warning as PySB is updated.

Parameters

model

[pysb.Model] Model to simulate.

tspan

[vector-like, optional] Time values over which to simulate. The first and last values define the time range. Returned trajectories are sampled at every value unless the simulation is interrupted for some reason, e.g., due to satisfaction of a logical stopping criterion (see ‘tout’ below).

initials

[vector-like or dict, optional] Values to use for the initial condition of all species. Ordering is determined by the order of model.species. If not specified, initial conditions will be taken from model.initials (with initial condition parameter values taken from *param_values* if specified).

param_values

[vector-like or dict, optional] Values to use for every parameter in the model. Ordering is determined by the order of model.parameters. If passed as a dictionary, keys must be parameter names. If not specified, parameter values will be taken directly from model.parameters.

verbose

[bool or int, optional (default: False)] Sets the verbosity level of the logger. See the logging levels and constants from Python’s logging module for interpretation of integer values. False is equal to the PySB default level (currently WARNING), True is equal to DEBUG.

****kwargs**

[dict] Extra keyword arguments, including:

- **cleanup:** Boolean, delete directory after completion if True

Examples

Simulate a model and display the results for an observable:

```
>>> from pysb.examples.robertson import model
>>> import numpy as np
>>> np.set_printoptions(precision=4)
>>> sim = StochKitSimulator(model, tspan=np.linspace(0, 10, 5))
```

Here we supply a “seed” to the random number generator for deterministic results, but for most purposes it is recommended to leave this blank.

```
>>> simulation_result = sim.run(n_runs=2, seed=123456)
```

A_total trajectory for first run

```
>>> print(simulation_result.observables[0]['A_total'])  
[1.  0.  0.  0.  0.]
```

A_total trajectory for second run

```
>>> print(simulation_result.observables[1]['A_total'])  
[1.  1.  1.  0.  0.]
```

For further information on retrieving trajectories (species, observables, expressions over time) from the `simulation_result` object returned by `run()`, see the examples under the `SimulationResult` class.

run(*tspan=None, initials=None, param_values=None, n_runs=1, algorithm='ssa', output_dir=None, num_processors=1, seed=None, method=None, stats=False, epsilon=None, threshold=None*)

Run a simulation and returns the result (trajectories)

Note: In early versions of the Simulator class, `tspan`, `initials` and `param_values` supplied to this method persisted to future `run()` calls. This is no longer the case.

Parameters

tspan

initials

param_values

See parameter definitions in [StochKitSimulator](#).

n_runs

[int] The number of simulation runs per parameter set. The total number of simulations is therefore `n_runs * max(len(initials), len(param_values))`

algorithm

[str] Choice of 'ssa' (Gillespie's stochastic simulation algorithm) or 'tau_leaping' (Tau leaping algorithm)

output_dir

[str or None] Directory for StochKit output, or None for a system-specific temporary directory

num_processors

[int] Number of CPU cores for StochKit to use (default: 1)

seed

[int or None] A random number seed for StochKit. Set to any integer value for deterministic behavior.

method

[str or None] StochKit "method" argument, default None. Only used by StochKit 2.1 (not yet released at time of writing).

stats

[bool] Ask StochKit to generate simulation summary statistics if True

epsilon

[float or None] Tolerance parameter for tau-leaping algorithm

threshold

[int or None] Threshold parameter for tau-leaping algorithm

Returns

A *SimulationResult* object

4.4 Set/get paths for external tools (pysb.pathfinder)

`pysb.pathfinder.get_path(prog_name)`

Gets the currently active path to an external executable

The path will be determined automatically if not set (see return value). To override, call `set_path()`.

Parameters

prog_name: str

The PySB internal program name for an executable (run `list_programs()` for a list).

Returns

The currently active path to an external executable. If the path hasn't previously been set, the relevant environment variable for that program's path will be searched. Failing that, a list of default paths for the operating system will be checked. An Exception is raised if none of these approaches works.

`pysb.pathfinder.list_programs()`

Return the list of available external programs as a dictionary

Returns

A dictionary containing the internal program name (key) and the human-readable name and environment variable (value) to adjust the path for that program.

`pysb.pathfinder.set_path(prog_name, full_path)`

Sets the full path to an external executable at runtime

External program paths can also be adjusted by environment variable prior to first use; run `list_programs()` for a list of programs.

Parameters

prog_name: str

The internal program name for an executable. (see `list_programs()`)

full_path: str

The full path to the external executable or its enclosing directory. If the path is a directory, it will be searched for the executable. A `ValueError` will be raised if there's an issue with the path (not found, permissions etc.).

4.5 Testing PySB Models (`pysb.testing.modeltests`)

```
class pysb.testing.modeltests.AllObservablesInRules(*args, **kwargs)

class pysb.testing.modeltests.ModelAssertion(*args, **kwargs)
    Base class for model assertions

exception pysb.testing.modeltests.ModelAssertionFailure(assertion, model, message=None)

class pysb.testing.modeltests.ReactionAssertion(*args, **kwargs)

class pysb.testing.modeltests.ReactionNetworkAssertion(*args, **kwargs)
    Base class for reaction network assertions
    Checks the reaction network has been generated

class pysb.testing.modeltests.RuleAssertion(*args, **kwargs)

class pysb.testing.modeltests.SpeciesAssertion(*args, **kwargs)
    Class for checking species within a reaction network

class pysb.testing.modeltests.SpeciesDoesNotExist(*args, **kwargs)

class pysb.testing.modeltests.SpeciesExists(*args, **kwargs)
    Checks a species pattern exists in the list of species

class pysb.testing.modeltests.SpeciesIsProduct(*args, **kwargs)
    Checks a species pattern appears on the product side of a reaction

class pysb.testing.modeltests.SpeciesIsReactant(*args, **kwargs)
    Checks a species pattern appears on the reactant side of a reaction

class pysb.testing.modeltests.SpeciesNeverProduct(*args, **kwargs)

class pysb.testing.modeltests.SpeciesNeverReactant(*args, **kwargs)

class pysb.testing.modeltests.SpeciesOnlyProduct(*args, **kwargs)
    Checks a species appears as a product but never as a reactant

class pysb.testing.modeltests.SpeciesOnlyReactant(*args, **kwargs)
    Checks a species appears as a reactant but never as a product

class pysb.testing.modeltests.TestSuite(model=None)
    A suite of tests for checking properties of a model

    There are two modes of operation: building a test suite using add() and executing all the tests at once with check_all(), or executing tests immediately with check().
```

Examples

Create a test suite for the EARM 1.0 model:

```
>>> from pysb.testing.modeltests import TestSuite, SpeciesExists,
↳ SpeciesDoesNotExist
>>> from pysb.bng import generate_equations
>>> from pysb.examples.earm_1_0 import model
>>> ts = TestSuite(model)
```

Create variables for model components (not needed for models defined interactively):

```
>>> AMito, mCytoC, mSmac, cSmac, L, CPARP = [model.monomers[m] for m in
↳      ('AMito', 'mCytoC', 'mSmac', 'cSmac',
↳      'L', 'CPARP')]
```

Add some assertions:

Check that `AMito(b=1) % mSmac(b=1)` exists in the species graph (note this doesn't guarantee the species will actually be produced/consumed/change in concentration; that depends on the rate constants):

```
>>> ts.add(SpeciesExists(AMito(b=1) % mSmac(b=1)))
```

This is the opposite check, that the complex above doesn't exist, which should of course fail:

```
>>> ts.add(SpeciesDoesNotExist(AMito(b=1) % mSmac(b=1)))
```

We can also specify that species matching a pattern should never exist in a model. For example, we shouldn't ever be producing unbound ligand in the EARM 1.0 model:

```
>>> ts.add(SpeciesNeverProduct(L(b=None)))
```

We could also have used `SpeciesOnlyReactant`. The difference is the latter checks for an appearance as a reactant, whereas `SpeciesNeverProduct` would pass whether the species appeared as a reactant or not.

```
>>> ts.add(SpeciesOnlyReactant(L(b=None)))
```

CPARP is an output in this model, so it should appear as a product but never as a reactant:

```
>>> ts.add(SpeciesOnlyProduct(CPARP()))
```

When we're ready, we can generate the reactions and check the assertions:

```
>>> generate_equations(model)
>>> ts.check_all()
SpeciesExists(AMito() % mSmac())...OK...
SpeciesDoesNotExist(AMito() % mSmac())...FAIL...
  [AMito(b=1) % mSmac(b=1)]...
SpeciesExists(AMito(b=1) % mCytoC(b=1))...OK...
SpeciesNeverProduct(L(b=None))...OK...
SpeciesOnlyProduct(CPARP())...OK...
```

We can also execute any test immediately without adding it to the test suite (note that some tests require a reaction network to be generated):

```
>>> ts.check(SpeciesExists(L(b=None)))
True
```

check(assertion)

Checks an assertion immediately without adding it to the test suite

Parameters

assertion: ModelAssertion

An instance of the ModelAssertion subclass

Returns

True if assertion succeeded or raises a `ModelAssertionFailure` exception if not

check_all(*stop_on_exception=False*)
Runs all assertions in the test suite

4.6 BioNetGen integration (pysb.bng)

class pysb.bng.**BngBaseInterface**(*model=None, verbose=False, cleanup=False, output_prefix=None, output_dir=None, model_additional_species=None, model_population_maps=None*)

Abstract base class for interfacing with BNG

abstract action(*action, **kwargs*)
Generates code to execute a BNG action command

Parameters

action: **string**
The name of the BNG action function

kwargs: **kwargs, optional**
Arguments and values to supply to BNG

property base_filename
Returns the base filename (without extension) for BNG output files

property bng_filename
Returns the BNG command list (.bngl) filename (does not check whether the file exists)

property net_filename
Returns the BNG network filename (does not check whether the file exists)

read_netfile()
Reads a BNG network file as a string. Note that you must execute network generation separately before attempting this, or the file will not be found. :return: Contents of the BNG network file as a string

read_simulation_results()
Read the results of a BNG simulation as a numpy array

Returns

numpy.ndarray
Simulation results in a 2D matrix (time on Y axis, species/observables/expressions on X axis depending on simulation type)

static read_simulation_results_multi(*base_filenames*)
Read the results of multiple BNG simulations

Parameters

base_filenames: **list of str**
A list of filename stems to read simulation results in from, including the full path but not including any file extension.

Returns

list of numpy.ndarray

List of simulation results, each in a 2D matrix (time on Y axis, species/observables/expressions on X axis depending on simulation type)

```
class pysb.bng.BngConsole(model=None, verbose=False, cleanup=True, output_dir=None,  
                        output_prefix=None, timeout=30, suppress_warnings=False,  
                        model_additional_species=None)
```

Interact with BioNetGen through BNG Console

```
action(action, **kwargs)
```

Generates a BNG action command and executes it through the console, returning any console output

Parameters
action

[string] The name of the BNG action function

kwargs

[kwargs, optional] Arguments and values to supply to BNG

```
generate_network(overwrite=False)
```

Generates a network in BNG and returns the network file contents as a string

Parameters
overwrite: bool, optional

Overwrite existing network file, if any

```
load_bngl(bngl_file)
```

Load a BNGL file in the BNG console

Parameters
bngl_file

[string] The filename of a .bngl file

```
class pysb.bng.BngFileInterface(model=None, verbose=False, output_dir=None, output_prefix=None,  
                               cleanup=True, model_additional_species=None,  
                               model_population_maps=None)
```

```
action(action, **kwargs)
```

Generates a BNG action command and adds it to the command queue

Parameters
action

[string] The name of the BNG action function

kwargs

[kwargs, optional] Arguments and values to supply to BNG

```
execute(reload_netfile=False, skip_file_actions=True)
```

Executes all BNG commands in the command queue.

Parameters
reload_netfile: bool or str

If true, attempts to reload an existing .net file from a previous execute() iteration. If a string, the filename specified in the string is supplied to BNG's readFile (which can be any file type BNG supports, such as .net or .bngl). This is useful for running multiple actions in a row, where results need to be read into PySB before a new series of actions is executed.

skip_file_actions: bool

Only used if the previous argument is not False. Set this argument to True to ignore any actions block in the loaded file.

set_concentration(*cplx_pat*, *value*)

Generates a BNG action command and adds it to the command queue

Parameters

cplx_pat: pysb.ComplexPattern or string

Species ComplexPattern, or a BNG format string representation

value: float-like

Initial concentration

set_parameter(*name*, *value*)

Generates a BNG action command and adds it to the command queue

Parameters

name: string

The name of the parameter to set

value: float-like

Value of parameter

exception pysb.bng.BngInterfaceError

BNG reported an error

exception pysb.bng.NoInitialConditionsError

Model initial_conditions is empty.

exception pysb.bng.NoRulesError

Model rules is empty.

pysb.bng.generate_equations(*model*, *cleanup*=True, *verbose*=False, *kwargs*)**

Generate math expressions for reaction rates and species in a model.

This fills in the following pieces of the model:

- species
- reactions
- reactions_bidirectional
- observables (just *coefficients* and *species* fields for each element)

Parameters

model

[Model] Model to pass to generate_network.

cleanup

[bool, optional] If True (default), delete the temporary files after the simulation is finished. If False, leave them in place (in *output_dir*). Useful for debugging.

verbose

[bool or int, optional (default: False)] Sets the verbosity level of the logger. See the logging levels and constants from Python's logging module for interpretation of integer values. False is equal to the PySB default level (currently WARNING), True is equal to DEBUG.

`pysb.bng.generate_network(model, cleanup=True, append_stdout=False, verbose=False, **kwargs)`

Return the output from BNG's `generate_network` function given a model.

The output is a BNGL model definition with additional sections 'reactions' and 'groups', and the 'species' section expanded to contain all possible species. BNG refers to this as a 'net' file.

Parameters

model

[Model] Model to pass to `generate_network`.

cleanup

[bool, optional] If True (default), delete the temporary files after the simulation is finished. If False, leave them in place (in `output_dir`). Useful for debugging.

append_stdout

[bool, optional] This option is no longer supported and has been left here for API compatibility reasons.

verbose

[bool or int, optional (default: False)] Sets the verbosity level of the logger. See the logging levels and constants from Python's logging module for interpretation of integer values. False is equal to the PySB default level (currently WARNING), True is equal to DEBUG.

`pysb.bng.load_equations(model, netfile)`

Load model equations from a specified netfile

Useful for large models where BioNetGen network generation takes a long time - the .net file can be saved and reloaded using this function at a later date.

Parameters

model: pysb.Model

PySB model file

netfile: str

BNG netfile

`pysb.bng.parse_bngl_expr(text, *args, **kwargs)`

Convert a BNGL math expression string to a sympy Expr.

`pysb.bng.run_ssa(model, t_end=10, n_steps=100, param_values=None, output_dir=None, output_file_basename=None, cleanup=True, verbose=False, **additional_args)`

Simulate a model with BNG's SSA simulator and return the trajectories.

Parameters

model

[Model] Model to simulate.

t_end

[number, optional] Final time point of the simulation.

n_steps

[int, optional] Number of steps in the simulation.

param_values

[vector-like or dictionary, optional] Values to use for every parameter in the model. Ordering is determined by the order of `model.parameters`. If not specified, parameter values will be taken directly from `model.parameters`.

output_dir

[string, optional] Location for temporary files generated by BNG. If None (the default), uses a temporary directory provided by the system. A temporary directory with a random name is created within the supplied location.

output_file_basename

[string, optional] This argument is used as a prefix for the temporary BNG output directory, rather than the individual files.

cleanup

[bool, optional] If True (default), delete the temporary files after the simulation is finished. If False, leave them in place. Useful for debugging.

verbose

[bool or int, optional (default: False)] Sets the verbosity level of the logger. See the logging levels and constants from Python's logging module for interpretation of integer values. False is equal to the PySB default level (currently WARNING), True is equal to DEBUG.

additional_args: kwargs, optional

Additional arguments to pass to BioNetGen

`pysb.bng.set_bng_path(dir)`

Deprecated. Use `pysb.pathfinder.set_path()` instead.

4.7 Kappa integration (`pysb.kappa`)

Wrapper functions for running the Kappa programs *KaSim* and *KaSa*.

The path to the directory containing the KaSim and KaSa executables can be specified in one of three ways:

- set the KAPPAPATH environment variable to the KaSim directory
- move Kappa to /usr/local/share/KaSim (macOS, Linux) or c:\Program Files\KaSim (Windows)
- set the path using the `pysb.pathfinder.set_path()` function at runtime

exception `pysb.kappa.KasaInterfaceError`

exception `pysb.kappa.KasimInterfaceError`

class `pysb.kappa.SimulationResult(timecourse, flux_map)`

flux_map

Alias for field number 1

timecourse

Alias for field number 0

class `pysb.kappa.StaticAnalysisResult(contact_map, influence_map)`

contact_map

Alias for field number 0

influence_map

Alias for field number 1

`pysb.kappa.contact_map(model, **kwargs)`

Generates the contact map via KaSa.

Parameters

model

[pysb.core.Model] The model for generating the influence map.

****kwargs**

[other keyword arguments] Any other keyword arguments are passed to the function [run_static_analysis\(\)](#).

Returns

networkx MultiGraph object containing the contact map. For details on viewing the contact map graphically see [run_static_analysis\(\)](#) (notes section).

`pysb.kappa.influence_map(model, **kwargs)`

Generates the influence map via KaSa.

Parameters

model

[pysb.core.Model] The model for generating the influence map.

****kwargs**

[other keyword arguments] Any other keyword arguments are passed to the function [run_static_analysis\(\)](#).

Returns

networkx MultiGraph object containing the influence map. For details on viewing the influence map graphically see [run_static_analysis\(\)](#) (notes section).

`pysb.kappa.run_simulation(model, time=10000, points=200, cleanup=True, output_prefix=None, output_dir=None, flux_map=False, perturbation=None, seed=None, verbose=False)`

Runs the given model using KaSim and returns the parsed results.

Deprecated since version 1.10.

Use [pysb.simulator.KappaSimulator\(\)](#) instead

Parameters

model

[pysb.core.Model] The model to simulate/analyze using KaSim.

time

[number] The amount of time (in arbitrary units) to run a simulation. Identical to the -u time -l argument when using KaSim at the command line. Default value is 10000. If set to 0, no simulation will be run.

points

[integer] The number of data points to collect for plotting. Note that this is not identical to the -p argument of KaSim when called from the command line, which denotes plot period (time interval between points in plot). Default value is 200. Note that the number of points actually returned by the simulator will be points + 1 (including the 0 point).

cleanup

[boolean] Specifies whether output files produced by KaSim should be deleted after execution is completed. Default value is True.

output_prefix: str

Prefix of the temporary directory name. Default is 'tmpKappa_<model name>_'.

output_dir

[string] The directory in which to create the temporary directory for the .ka and other output files. Defaults to the system temporary file directory (e.g. /tmp). If the specified directory does not exist, an Exception is thrown.

flux_map: boolean

Specifies whether or not to produce the flux map (generated over the full duration of the simulation). Default value is False.

perturbation

[string or None] Optional perturbation language syntax to be appended to the Kappa file. See KaSim manual for more details. Default value is None (no perturbation).

seed

[integer] A seed integer for KaSim random number generator. Set to None to allow KaSim to use a random seed (default) or supply a seed for deterministic behaviour (e.g. for testing)

verbose

[boolean] Whether to pass the output of KaSim through to stdout/stderr.

Returns

If flux_map is False, returns the kasim simulation data as a Numpy ndarray.

Data is accessed using the syntax::

results[index_name]

The index 'time' gives the time coordinates of the simulation. Data for the observables can be accessed by indexing the array with the names of the observables. Each entry in the ndarray has length points + 1, due to the inclusion of both the zero point and the final timepoint.

If flux_map is True, returns an instance of SimulationResult, a namedtuple with two members, *timecourse* and *flux_map*. The *timecourse* field contains the simulation ndarray, and the *flux_map* field is an instance of a networkx MultiGraph containing the flux map. For details on viewing the flux map graphically see [run_static_analysis\(\)](#) (notes section).

```
pysb.kappa.run_static_analysis(model, influence_map=False, contact_map=False, cleanup=True,
                               output_prefix=None, output_dir=None, verbose=False)
```

Run static analysis (KaSa) on to get the contact and influence maps.

If neither influence_map nor contact_map are set to True, then a ValueError is raised.

Parameters

model

[pysb.core.Model] The model to simulate/analyze using KaSa.

influence_map

[boolean] Whether to compute the influence map.

contact_map

[boolean] Whether to compute the contact map.

cleanup

[boolean] Specifies whether output files produced by KaSa should be deleted after execution is completed. Default value is True.

output_prefix: str

Prefix of the temporary directory name. Default is 'tmpKappa_<model name>_'.

output_dir

[string] The directory in which to create the temporary directory for the .ka and other output files. Defaults to the system temporary file directory (e.g. /tmp). If the specified directory does not exist, an Exception is thrown.

verbose

[boolean] Whether to pass the output of KaSa through to stdout/stderr.

Returns

StaticAnalysisResult, a namedtuple with two fields, *contact_map* and *influence_map*, each containing the respective result as an instance of a **networkx MultiGraph**. If either the *contact_map* or *influence_map* argument to the function is False, the corresponding entry in the **StaticAnalysisResult** returned by the function will be None.

Notes

To view a networkx file graphically, use *draw_network*:

```
import networkx as nx
nx.draw_networkx(g, with_labels=True)
```

You can use *graphviz_layout* to use graphviz for layout (requires pydot library):

```
import networkx as nx
pos = nx.drawing.nx_pydot.graphviz_layout(g, prog='dot')
nx.draw_networkx(g, pos, with_labels=True)
```

For further information, see the networkx documentation on visualization: <https://networkx.github.io/documentation/latest/reference/drawing.html>

`pysb.kappa.set_kappa_path(path)`

Set the path to the KaSim and KaSa executables.

Deprecated. Use `pysb.pathfinder.set_path()` instead.

Parameters**path: string**

Directory containing KaSim and KaSa executables.

4.8 Macros (`pysb.macros`)

A collection of generally useful modeling macros.

These macros are written to be as generic and reusable as possible, serving as a collection of best practices and implementation ideas. They conform to the following general guidelines:

- All components created by the macro are implicitly added to the current model and explicitly returned in a `ComponentSet`.
- Parameters may be passed as `Parameter` or `Expression` objects, or as plain numbers for which `Parameter` objects will be automatically created using an appropriate naming convention.
- Arguments which accept a `MonomerPattern` should also accept `Monomers`, which are to be interpreted as `MonomerPatterns` on that `Monomer` with an empty condition list. This is typically implemented by having the macro apply the “call” (parentheses) operator to the argument with an empty argument list and using the resulting value instead of the original argument when creating Rules, e.g. `arg = arg()`. Calling a `Monomer` will return a `MonomerPattern`, and calling a `MonomerPattern` will return a copy of itself, so calling either is guaranteed to return a `MonomerPattern`.

The `_macro_rule` helper function contains much of the logic needed to follow these guidelines. Every macro in this module either uses `_macro_rule` directly or calls another macro which does.

Another useful function is `_verify_sites` which will raise an exception if a `Monomer` or `MonomerPattern` does not possess every one of a given list of sites. This can be used to trigger such errors up front rather than letting an exception occur at the point where the macro tries to use the invalid site in a pattern, which can be harder for the caller to debug.

`pysb.macros.assemble_chain_sequential_base(base, basesite, subunit, site1, site2, max_size, ktable, comp=1)`

Generate rules to assemble a homomeric chain sequentially onto a base complex (only the subunit creates repeating chain, not the base).

The chain species are created by sequential addition of *subunit* monomers. The chain structure is defined by the *pore_species_base* macro.

Parameters

base

[`Monomer` or `MonomerPattern`] The base complex to which the chain is attached.

basesite

[string] The name of the site on the complex to which chain attaches.

subunit

[`Monomer` or `MonomerPattern`] The subunit of which the chain is composed.

site1, site2

[string] The names of the sites where one copy of *subunit* binds to the next; the first will also be the site where the first subunit binds the base.

max_size

[integer] The maximum number of subunits in the chain.

ktable

[list of lists of Parameters or numbers] Table of forward and reverse rate constants for the assembly steps. The outer list must be of length *max_size* + 1, and the inner lists must all be of length 2. In the outer list, the first element corresponds to the first assembly step in which the complex binds the first subunit. The next corresponds to a bound subunit binding to form a 2-subunit complex, and the last element corresponds to the final step in which the *max_size* *th* subunit is added. Each inner list contains the forward and reverse

rate constants (in that order) for the corresponding assembly reaction, and each of these pairs must comprise solely Parameter objects or solely numbers (never one of each). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on `subunit`, `site1`, `site2` and the chain sizes and these parameters will be included at the end of the returned component list.

comp

[optional; a ComplexPattern to which the base molecule is attached.]

Examples

Assemble a three-membered chain by sequential addition of monomers to a base, which is in turn attached to a complex, with the same forward/reverse rates for monomer-monomer and monomer-dimer interactions:

```
Model()
Monomer('Base', ['b1', 'b2'])
Monomer('Unit', ['p1', 'p2'])
Monomer('Complex1', ['s1'])
Monomer('Complex2', ['s1', 's2'])
assemble_chain_sequential(Base(b2=ANY), 'b1', Unit, 'p1', 'p2', 3, [[1e-4, 1e-1]] * 2,
    Complex1(s1=ANY) % Complex2(s1=ANY, s2=ANY))
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('Base', ['b1', 'b2'])
Monomer('Base', ['b1', 'b2'])
>>> Monomer('Unit', ['p1', 'p2'])
Monomer('Unit', ['p1', 'p2'])
>>> Monomer('Complex1', ['s1'])
Monomer('Complex1', ['s1'])
>>> Monomer('Complex2', ['s1', 's2'])
Monomer('Complex2', ['s1', 's2'])
>>> assemble_chain_sequential_base(Base(b2=ANY), 'b1', Unit, 'p1', 'p2', 3, [[1e-4,
    1e-1]] * 2, Complex1(s1=ANY) % Complex2(s1=ANY, s2=ANY))
ComponentSet([
  Rule('assemble_chain_sequential_base_Unit_2', Unit(p1=None, p2=None) +
    Complex1(s1=ANY) % Complex2(s1=ANY, s2=ANY) % Base(b1=1, b2=ANY) % Unit(p1=1,
    p2=None) | Complex1(s1=ANY) % Complex2(s1=ANY, s2=ANY) % Base(b1=1, b2=ANY) %
    Unit(p1=1, p2=2) % Unit(p1=2, p2=None), assemble_chain_sequential_base_Unit_2_kf,
    assemble_chain_sequential_base_Unit_2_kr),
  Parameter('assemble_chain_sequential_base_Unit_2_kf', 0.0001),
  Parameter('assemble_chain_sequential_base_Unit_2_kr', 0.1),
  Rule('assemble_chain_sequential_base_Unit_3', Unit(p1=None, p2=None) +
    Complex1(s1=ANY) % Complex2(s1=ANY, s2=ANY) % Base(b1=1, b2=ANY) % Unit(p1=1,
    p2=2) % Unit(p1=2, p2=None) | MatchOnce(Complex1(s1=ANY) % Complex2(s1=ANY,
    s2=ANY) % Base(b1=1, b2=ANY) % Unit(p1=1, p2=2) % Unit(p1=2, p2=3) % Unit(p1=3,
    p2=None)), assemble_chain_sequential_base_Unit_3_kf, assemble_chain_sequential_
    base_Unit_3_kr),
  Parameter('assemble_chain_sequential_base_Unit_3_kf', 0.0001),
  Parameter('assemble_chain_sequential_base_Unit_3_kr', 0.1),
])
```

`pysb.macros.assemble_pore_sequential(subunit, site1, site2, max_size, ktable)`

Generate rules to assemble a circular homomeric pore sequentially.

The pore species are created by sequential addition of *subunit* monomers, i.e. larger oligomeric species never fuse together. The pore structure is defined by the *pore_species* macro.

Parameters

subunit

[Monomer or MonomerPattern] The subunit of which the pore is composed.

site1, site2

[string] The names of the sites where one copy of *subunit* binds to the next.

max_size

[integer] The maximum number of subunits in the pore.

ktable

[list of lists of Parameters or numbers] Table of forward and reverse rate constants for the assembly steps. The outer list must be of length *max_size* - 1, and the inner lists must all be of length 2. In the outer list, the first element corresponds to the first assembly step in which two monomeric subunits bind to form a 2-subunit complex, and the last element corresponds to the final step in which the *max_size*'th subunit is added. Each inner list contains the forward and reverse rate constants (in that order) for the corresponding assembly reaction, and each of these pairs must comprise solely Parameter objects or solely numbers (never one of each). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on *subunit*, *site1*, *site2* and the pore sizes and these parameters will be included at the end of the returned component list.

Examples

Assemble a three-membered pore by sequential addition of monomers, with the same forward/reverse rates for monomer-monomer and monomer-dimer interactions:

```
Model()
Monomer('Unit', ['p1', 'p2'])
assemble_pore_sequential(Unit, 'p1', 'p2', 3, [[1e-4, 1e-1]] * 2)
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('Unit', ['p1', 'p2'])
Monomer('Unit', ['p1', 'p2'])
>>> assemble_pore_sequential(Unit, 'p1', 'p2', 3, [[1e-4, 1e-1]] * 2)
ComponentSet([
  Rule('assemble_pore_sequential_Unit_2',
    Unit(p1=None, p2=None) + Unit(p1=None, p2=None) |
    Unit(p1=None, p2=1) % Unit(p1=1, p2=None),
    assemble_pore_sequential_Unit_2_kf,
    assemble_pore_sequential_Unit_2_kr),
  Parameter('assemble_pore_sequential_Unit_2_kf', 0.0001),
  Parameter('assemble_pore_sequential_Unit_2_kr', 0.1),
  Rule('assemble_pore_sequential_Unit_3',
    Unit(p1=None, p2=None) + Unit(p1=None, p2=1) % Unit(p1=1, p2=None) |
```

(continues on next page)

(continued from previous page)

```

        MatchOnce(Unit(p1=3, p2=1) % Unit(p1=1, p2=2) % Unit(p1=2, p2=3)),
        assemble_pore_sequential_Unit_3_kf,
        assemble_pore_sequential_Unit_3_kr),
    Parameter('assemble_pore_sequential_Unit_3_kf', 0.0001),
    Parameter('assemble_pore_sequential_Unit_3_kr', 0.1),
])

```

`pysb.macros.bind(s1, site1, s2, site2, klist)`

Generate the reversible binding reaction $S1 + S2 \mid S1:S2$.

Parameters

s1, s2

[Monomer or MonomerPattern] Monomers participating in the binding reaction.

site1, site2

[string] The names of the sites on s1 and s2 used for binding.

klist

[list of 2 Parameters or list of 2 numbers] Forward and reverse rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of S1 and S2 and these parameters will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains the bidirectional binding Rule and optionally two Parameters if klist was given as numbers.

Examples

Binding between A and B:

```

Model()
Monomer('A', ['x'])
Monomer('B', ['y'])
bind(A, 'x', B, 'y', [1e-4, 1e-1])

```

Execution:

```

>>> Model()
<Model '_interactive_' ...>
>>> Monomer('A', ['x'])
Monomer('A', ['x'])
>>> Monomer('B', ['y'])
Monomer('B', ['y'])
>>> bind(A, 'x', B, 'y', [1e-4, 1e-1])
ComponentSet([
    Rule('bind_A_B', A(x=None) + B(y=None) | A(x=1) % B(y=1), bind_A_B_kf, bind_A_B_
    ↪kr),
    Parameter('bind_A_B_kf', 0.0001),
    Parameter('bind_A_B_kr', 0.1),
])

```

`pysb.macros.bind_complex(s1, site1, s2, site2, klist, m1=None, m2=None)`

Generate the reversible binding reaction $S1 + S2 \mid S1:S2$, with optional complexes attached to either $S1$ ($C1:S1 + S2 \mid C1:S1:S2$), $S2$ ($S1 + C2:S2 \mid C2:S2:S1$), or both ($C1:S1 + C2:S2 \mid C1:S1:S2:C2$).

Parameters

s1, s2

[Monomer, MonomerPattern, or ComplexPattern] Monomers or complexes participating in the binding reaction.

site1, site2

[string] The names of the sites on s1 and s2 used for binding.

klist

[list of 2 Parameters or list of 2 numbers] Forward and reverse rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of S1 and S2 and these parameters will be included at the end of the returned component list.

m1, m2

[Monomer or MonomerPattern] If s1 or s2 binding site is present in multiple monomers within a complex, the specific monomer desired for binding must be specified.

Returns

components

[ComponentSet] The generated components. Contains the bidirectional binding Rule and optionally two Parameters if klist was given as numbers.

Examples

Binding between A:B and C:D:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('A', ['a', 'b'])
Monomer('A', ['a', 'b'])
>>> Monomer('B', ['c', 'd'])
Monomer('B', ['c', 'd'])
>>> Monomer('C', ['e', 'f'])
Monomer('C', ['e', 'f'])
>>> Monomer('D', ['g', 'h'])
Monomer('D', ['g', 'h'])
>>> bind_complex(A(a=1) % B(c=1), 'b', C(e=2) % D(g=2), 'h', [1e-4, 1e-
↪ 1])
ComponentSet([
Rule('bind_AB_DC', A(a=1, b=None) % B(c=1) + D(g=3, h=None) % C(e=3)
| A(a=1, b=50) % B(c=1) % D(g=3, h=50) % C(e=3), bind_AB_DC_kf,
bind_AB_DC_kr),
Parameter('bind_AB_DC_kf', 0.0001),
Parameter('bind_AB_DC_kr', 0.1),
])
```

Execution:

```

>>> Model()
<Model '_interactive_' ...>
>>> Monomer('A', ['a', 'b'])
Monomer('A', ['a', 'b'])
>>> Monomer('B', ['c', 'd'])
Monomer('B', ['c', 'd'])
>>> Monomer('C', ['e', 'f'])
Monomer('C', ['e', 'f'])
>>> Monomer('D', ['g', 'h'])
Monomer('D', ['g', 'h'])
>>> bind(A, 'a', B, 'c', [1e4, 1e-1])
ComponentSet([
  Rule('bind_A_B',
    A(a=None) + B(c=None) | A(a=1) % B(c=1),
    bind_A_B_kf, bind_A_B_kr),
  Parameter('bind_A_B_kf', 10000.0),
  Parameter('bind_A_B_kr', 0.1),
])
>>> bind(C, 'e', D, 'g', [1e4, 1e-1])
ComponentSet([
  Rule('bind_C_D',
    C(e=None) + D(g=None) | C(e=1) % D(g=1),
    bind_C_D_kf, bind_C_D_kr),
  Parameter('bind_C_D_kf', 10000.0),
  Parameter('bind_C_D_kr', 0.1),
])
>>> bind_complex(A(a=1) % B(c=1), 'b', C(e=2) % D(g=2), 'h', [1e-4, 1e-
↪ 1])
ComponentSet([
  Rule('bind_AB_DC',
    A(a=1, b=None) % B(c=1) + D(g=3, h=None) % C(e=3) | A(a=1,
    b=50) % B(c=1) % D(g=3, h=50) % C(e=3),
    bind_AB_DC_kf, bind_AB_DC_kr),
  Parameter('bind_AB_DC_kf', 0.0001),
  Parameter('bind_AB_DC_kr', 0.1),
])

```

`pysb.macros.bind_table(bindtable, row_site, col_site, kf=None)`

Generate a table of reversible binding reactions.

Given two lists of species R and C, calls the *bind* macro on each pairwise combination (R[i], C[j]). The species lists and the parameter values are passed as a list of lists (i.e. a table) with elements of R passed as the “row headers”, elements of C as the “column headers”, and forward / reverse rate pairs (in that order) as tuples in the “cells”. For example with two elements in each of R and C, the table would appear as follows (note that the first row has one fewer element than the subsequent rows):

```

[[
  C1,      C2,
  [R1, (1e-4, 1e-1), (2e-4, 2e-1)],
  [R2, (3e-4, 3e-1), (4e-4, 4e-1)]]

```

Each parameter tuple may contain Parameters or numbers. If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of the relevant species and these parameters will be included at the end of the returned component list. To omit any individual reaction, pass None in place of the corresponding parameter

tuple.

Alternately, single k_d values (dissociation constant, k_r/k_f) may be specified instead of (k_f, k_r) tuples. If k_d s are used, a single shared k_f Parameter or number must be passed as an extra k_f argument. k_r values for each binding reaction will be calculated as k_d*k_f . It is important to remember that the forward rate constant is a single parameter shared across the entire bind table, as this may have implications for parameter fitting.

Parameters

bindtable

[list of lists] Table of reactants and rates, as described above.

row_site, col_site

[string] The names of the sites on the elements of R and C, respectively, used for binding.

kf

[Parameter or number, optional] If the “cells” in bindtable are given as single k_d values, this is the shared k_f used to calculate the k_r values.

Returns

components

[ComponentSet] The generated components. Contains the bidirectional binding Rules and optionally the Parameters for any parameters given as numbers.

Examples

Binding table for two species types (R and C), each with two members:

```
Model()
Monomer('R1', ['x'])
Monomer('R2', ['x'])
Monomer('C1', ['y'])
Monomer('C2', ['y'])
bind_table([[
                C1,          C2],
             [R1, (1e-4, 1e-1), (2e-4, 2e-1)],
             [R2, (3e-4, 3e-1),      None]],
            'x', 'y')
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('R1', ['x'])
Monomer('R1', ['x'])
>>> Monomer('R2', ['x'])
Monomer('R2', ['x'])
>>> Monomer('C1', ['y'])
Monomer('C1', ['y'])
>>> Monomer('C2', ['y'])
Monomer('C2', ['y'])
>>> bind_table([[
                C1,          C2],
             ...   [R1, (1e-4, 1e-1), (2e-4, 2e-1)],
             ...   [R2, (3e-4, 3e-1),      None]],
             ...   'x', 'y')
ComponentSet([
```

(continues on next page)

(continued from previous page)

```

Rule('bind_R1_C1', R1(x=None) + C1(y=None) | R1(x=1) % C1(y=1),
    bind_R1_C1_kf, bind_R1_C1_kr),
Parameter('bind_R1_C1_kf', 0.0001),
Parameter('bind_R1_C1_kr', 0.1),
Rule('bind_R1_C2', R1(x=None) + C2(y=None) | R1(x=1) % C2(y=1),
    bind_R1_C2_kf, bind_R1_C2_kr),
Parameter('bind_R1_C2_kf', 0.0002),
Parameter('bind_R1_C2_kr', 0.2),
Rule('bind_R2_C1', R2(x=None) + C1(y=None) | R2(x=1) % C1(y=1),
    bind_R2_C1_kf, bind_R2_C1_kr),
Parameter('bind_R2_C1_kf', 0.0003),
Parameter('bind_R2_C1_kr', 0.3),
])

```

`pysb.macros.bind_table_complex(bindtable, row_site, col_site, m1=None, m2=None, kf=None)`

Generate a table of reversible binding reactions when either the row or column species (or both) have a complex bound to them.

Given two lists of species R and C (which can be complexes or monomers), calls the `bind_complex` macro on each pairwise combination (R[i], C[j]). The species lists and the parameter values are passed as a list of lists (i.e. a table) with elements of R passed as the “row headers”, elements of C as the “column headers”, and forward / reverse rate pairs (in that order) as tuples in the “cells”. For example with two elements in each of R and C, the table would appear as follows (note that the first row has one fewer element than the subsequent rows):

```

[[
    C1,      C2],
[R1, (1e-4, 1e-1), (2e-4, 2e-1)],
[R2, (3e-4, 3e-1), (4e-4, 4e-1)]]

```

Each parameter tuple may contain Parameters or numbers. If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of the relevant species and these parameters will be included at the end of the returned component list. To omit any individual reaction, pass `None` in place of the corresponding parameter tuple.

Alternately, single `kd` values (dissociation constant, `kr/kf`) may be specified instead of (`kf`, `kr`) tuples. If `kds` are used, a single shared `kf` Parameter or number must be passed as an extra `kf` argument. `kr` values for each binding reaction will be calculated as `kd*kf`. It is important to remember that the forward rate constant is a single parameter shared across the entire bind table, as this may have implications for parameter fitting.

Parameters

bindtable

[list of lists] Table of reactants and rates, as described above.

row_site, col_site

[string] The names of the sites on the elements of R and C, respectively, used for binding.

m1

[Monomer or MonomerPattern, optional] Monomer in row complex for binding. Must be specified if there are multiple monomers that have the `row_site` within a complex.

m2

[Monomer or MonomerPattern, optional] Monomer in column complex for binding. Must be specified if there are multiple monomers that have the `col_site` within a complex.

kf

[Parameter or number, optional] If the “cells” in `bindtable` are given as single `kd` values,

this is the shared kf used to calculate the kr values.

Returns

components

[ComponentSet] The generated components. Contains the bidirectional binding Rules and optionally the Parameters for any parameters given as numbers.

Examples

Binding table for two species types (R and C, which can be complexes or monomers):

```
Model()
Monomer('R1', ['x', 'c1'])
Monomer('R2', ['x', 'c1'])
Monomer('C1', ['y', 'c2'])
Monomer('C2', ['y', 'c2'])
bind(C1(y=None), 'c2', C1(y=None), 'c2', (1e-3, 1e-2))
bind(R1(x=None), 'c1', R2(x=None), 'c1', (1e-3, 1e-2))
bind_table_complex([[
    C1(c2=1, y=None)%C1(c2=1),          C2],
    [R1()%R2(), (1e-4, 1e-1), (2e-4, 2e-1)],
    [R2, (3e-4, 3e-1), None]],
    ['x', 'y', m1=R1(), m2=C1(y=None, c2=1)])
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('R1', ['x', 'c1'])
Monomer('R1', ['x', 'c1'])
>>> Monomer('R2', ['x', 'c1'])
Monomer('R2', ['x', 'c1'])
>>> Monomer('C1', ['y', 'c2'])
Monomer('C1', ['y', 'c2'])
>>> Monomer('C2', ['y', 'c2'])
Monomer('C2', ['y', 'c2'])
>>> bind(C1(y=None), 'c2', C1(y=None), 'c2', (1e-3, 1e-2))
ComponentSet([
  Rule('bind_C1_C1', C1(y=None, c2=None) + C1(y=None, c2=None) | C1(y=None, c2=1) %_
  ↪ C1(y=None, c2=1), bind_C1_C1_kf, bind_C1_C1_kr),
  Parameter('bind_C1_C1_kf', 0.001),
  Parameter('bind_C1_C1_kr', 0.01),
])
>>> bind(R1(x=None), 'c1', R2(x=None), 'c1', (1e-3, 1e-2))
ComponentSet([
  Rule('bind_R1_R2', R1(x=None, c1=None) + R2(x=None, c1=None) | R1(x=None, c1=1) %_
  ↪ R2(x=None, c1=1), bind_R1_R2_kf, bind_R1_R2_kr),
  Parameter('bind_R1_R2_kf', 0.001),
  Parameter('bind_R1_R2_kr', 0.01),
])
>>> bind_table_complex([[
...          C1(c2=1, y=None)%C1(c2=1),          C2],
...          [R1()%R2(), (1e-4, 1e-1), (2e-
  ↪ 4, 2e-1)],
...          [R2, (3e-4, 3e-1),
  ↪
```

(continues on next page)

(continued from previous page)

```

→None]],
...
    'x', 'y', m1=R1(), m2=C1(y=None, c2=1))
ComponentSet([
Rule('bind_R1R2_C1C1', R1(x=None) % R2() + C1(y=None, c2=1) % C1(c2=1) | R1(x=50) %
→R2() % C1(y=50, c2=1) % C1(c2=1), bind_R1R2_C1C1_kf, bind_R1R2_C1C1_kr),
Parameter('bind_R1R2_C1C1_kf', 0.0001),
Parameter('bind_R1R2_C1C1_kr', 0.1),
Rule('bind_R1R2_C2', R1(x=None) % R2() + C2(y=None) | R1(x=50) % R2() % C2(y=50),
→bind_R1R2_C2_kf, bind_R1R2_C2_kr),
Parameter('bind_R1R2_C2_kf', 0.0002),
Parameter('bind_R1R2_C2_kr', 0.2),
Rule('bind_C1C1_R2', C1(y=None, c2=1) % C1(c2=1) + R2(x=None) | C1(y=50, c2=1) %
→C1(c2=1) % R2(x=50), bind_C1C1_R2_kf, bind_C1C1_R2_kr),
Parameter('bind_C1C1_R2_kf', 0.0003),
Parameter('bind_C1C1_R2_kr', 0.3),
])

```

`pysb.macros.catalyze(enzyme, e_site, substrate, s_site, product, klist)`

Generate the two-step catalytic reaction $E + S \rightarrow E:S \rightarrow E + P$.

Parameters

enzyme, substrate, product

[Monomer or MonomerPattern] E, S and P in the above reaction.

e_site, s_site

[string] The names of the sites on *enzyme* and *substrate* (respectively) where they bind each other to form the E:S complex.

klist

[list of 3 Parameters or list of 3 numbers] Forward, reverse and catalytic rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of enzyme, substrate and product and these parameters will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains two Rules (bidirectional complex formation and unidirectional product dissociation), and optionally three Parameters if klist was given as plain numbers.

Notes

When passing a MonomerPattern for *enzyme* or *substrate*, do not include *e_site* or *s_site* in the respective patterns. The macro will handle this.

Examples

Using distinct Monomers for substrate and product:

```
Model()
Monomer('E', ['b'])
Monomer('S', ['b'])
Monomer('P')
catalyze(E(), 'b', S(), 'b', P(), (1e-4, 1e-1, 1))
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('E', ['b'])
Monomer('E', ['b'])
>>> Monomer('S', ['b'])
Monomer('S', ['b'])
>>> Monomer('P')
Monomer('P')
>>> catalyze(E(), 'b', S(), 'b', P(), (1e-4, 1e-1, 1))
ComponentSet([
  Rule('bind_E_S_to_ES', E(b=None) + S(b=None) | E(b=1) % S(b=1),
      bind_E_S_to_ES_kf, bind_E_S_to_ES_kr),
  Parameter('bind_E_S_to_ES_kf', 0.0001),
  Parameter('bind_E_S_to_ES_kr', 0.1),
  Rule('catalyze_ES_to_E_P', E(b=1) % S(b=1) >> E(b=None) + P(),
      catalyze_ES_to_E_P_kc),
  Parameter('catalyze_ES_to_E_P_kc', 1.0),
])
```

Using a single Monomer for substrate and product with a state change:

```
Monomer('Kinase', ['b'])
Monomer('Substrate', ['b', 'y'], {'y': ('U', 'P')})
catalyze(Kinase(), 'b', Substrate(y='U'), 'b', Substrate(y='P'),
        (1e-4, 1e-1, 1))
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('Kinase', ['b'])
Monomer('Kinase', ['b'])
>>> Monomer('Substrate', ['b', 'y'], {'y': ('U', 'P')})
Monomer('Substrate', ['b', 'y'], {'y': ('U', 'P')})
>>> catalyze(Kinase(), 'b', Substrate(y='U'), 'b', Substrate(y='P'), (1e-4, 1e-1,
↪ 1))
ComponentSet([
  Rule('bind_Kinase_SubstrateU_to_KinaseSubstrateU',
      Kinase(b=None) + Substrate(b=None, y='U') | Kinase(b=1) % Substrate(b=1, y='U'
↪ ),
      bind_Kinase_SubstrateU_to_KinaseSubstrateU_kf,
      bind_Kinase_SubstrateU_to_KinaseSubstrateU_kr),
```

(continues on next page)

(continued from previous page)

```

Parameter('bind_Kinase_SubstrateU_to_KinaseSubstrateU_kf', 0.0001),
Parameter('bind_Kinase_SubstrateU_to_KinaseSubstrateU_kr', 0.1),
Rule('catalyze_KinaseSubstrateU_to_Kinase_SubstrateP',
     Kinase(b=1) % Substrate(b=1, y='U') >> Kinase(b=None) + Substrate(b=None, y='P
→'),
     catalyze_KinaseSubstrateU_to_Kinase_SubstrateP_kc),
Parameter('catalyze_KinaseSubstrateU_to_Kinase_SubstrateP_kc', 1.0),
])

```

`pysb.macros.catalyze_complex(enzyme, e_site, substrate, s_site, product, klist, m1=None, m2=None)`

Generate the two-step catalytic reaction $E + S \mid E:S \gg E + P$, while allowing complexes to serve as enzyme, substrate and/or product.

$E:S1 + S:S2 \mid E:S1:S2 \gg E:S1 + P:S2$

Parameters

enzyme, substrate, product

[Monomer, MonomerPattern, or ComplexPattern]

Monomers or complexes participating in the binding reaction.

e_site, s_site

[string]

The names of the sites on `enzyme` and `substrate` (respectively) where they bind each other to form the E:S complex.

klist

[list of 3 Parameters or list of 3 numbers]

Forward, reverse and catalytic rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of enzyme, substrate and product and these parameters will be included at the end of the returned component list.

m1, m2

[Monomer or MonomerPattern]

If enzyme or substrate binding site is present in multiple monomers within a complex, the specific monomer desired for binding must be specified.

Returns

components

[ComponentSet]

The generated components. Contains the bidirectional binding Rule and optionally three Parameters if klist was given as numbers.

`pysb.macros.catalyze_one_step(enzyme, substrate, product, kf)`

Generate the one-step catalytic reaction $E + S \gg E + P$.

Parameters

enzyme, substrate, product

[Monomer or MonomerPattern] E, S and P in the above reaction.

kf

[a Parameter or a number] Forward rate constant for the reaction. If a Parameter is passed,

it will be used directly in the generated Rules. If a number is passed, a Parameter will be created with an automatically generated name based on the names and states of the enzyme, substrate and product and this parameter will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains the unidirectional reaction Rule and optionally the forward rate Parameter if klist was given as a number.

Notes

In this macro, there is no direct binding between enzyme and substrate, so binding sites do not have to be specified. This represents an approximation for the case when the enzyme is operating in its linear range. However, if catalysis is nevertheless contingent on the enzyme or substrate being unbound on some site, then that information must be encoded in the MonomerPattern for the enzyme or substrate. See the examples, below.

Examples

Convert S to P by E:

```
Model()
Monomer('E', ['b'])
Monomer('S', ['b'])
Monomer('P')
catalyze_one_step(E, S, P, 1e-4)
```

If the ability of the enzyme E to catalyze this reaction is dependent on the site 'b' of E being unbound, then this macro must be called as

```
catalyze_one_step(E(b=None), S, P, 1e-4)
```

and similarly if the substrate or product must be unbound.

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('E', ['b'])
Monomer('E', ['b'])
>>> Monomer('S', ['b'])
Monomer('S', ['b'])
>>> Monomer('P')
Monomer('P')
>>> catalyze_one_step(E, S, P, 1e-4)
ComponentSet([
  Rule('one_step_E_S_to_E_P', E() + S() >> E() + P(), one_step_E_S_to_E_P_kf),
  Parameter('one_step_E_S_to_E_P_kf', 0.0001),
])
```

`pysb.macros.catalyze_one_step_reversible(enzyme, substrate, product, klist)`

Create fwd and reverse rules for catalysis of the form:

```
E + S -> E + P
P -> S
```

Parameters

enzyme, substrate, product

[Monomer or MonomerPattern] E, S and P in the above reactions.

klist

[list of 2 Parameters or list of 2 numbers] A list containing the rate constant for catalysis and the rate constant for the conversion of product back to substrate (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of S1 and S2 and these parameters will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains two rules (the single-step catalysis rule and the product reversion rule) and optionally the two generated Parameter objects if klist was given as numbers.

Notes

Calls the macro `catalyze_one_step` to generate the catalysis rule.

Examples

One-step, pseudo-first order conversion of S to P by E:

```
Model()
Monomer('E', ['b'])
Monomer('S', ['b'])
Monomer('P')
catalyze_one_step_reversible(E, S, P, [1e-1, 1e-4])
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('E', ['b'])
Monomer('E', ['b'])
>>> Monomer('S', ['b'])
Monomer('S', ['b'])
>>> Monomer('P')
Monomer('P')
>>> catalyze_one_step_reversible(E, S, P, [1e-1, 1e-4])
ComponentSet([
  Rule('one_step_E_S_to_E_P', E() + S() >> E() + P(), one_step_E_S_to_E_P_kf),
  Parameter('one_step_E_S_to_E_P_kf', 0.1),
  Rule('reverse_P_to_S', P() >> S(), reverse_P_to_S_kr),
  Parameter('reverse_P_to_S_kr', 0.0001),
])
```

`pysb.macros.catalyze_state(enzyme, e_site, substrate, s_site, mod_site, state1, state2, klist)`

Generate the two-step catalytic reaction $E + S \mid E:S \gg E + P$. A wrapper around `catalyze()` with a signature specifying the state change of the substrate resulting from catalysis.

Parameters

enzyme

[Monomer or MonomerPattern] E in the above reaction.

substrate

[Monomer or MonomerPattern] S and P in the above reaction. The product species is assumed to be identical to the substrate species in all respects except the state of the modification site. The state of the modification site should not be specified in the MonomerPattern for the substrate.

e_site, s_site

[string] The names of the sites on *enzyme* and *substrate* (respectively) where they bind each other to form the E:S complex.

mod_site

[string] The name of the site on the substrate that is modified by catalysis.

state1, state2

[strings] The states of the modification site (*mod_site*) on the substrate before (*state1*) and after (*state2*) catalysis.

klist

[list of 3 Parameters or list of 3 numbers] Forward, reverse and catalytic rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of enzyme, substrate and product and these parameters will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains two Rules (bidirectional complex formation and unidirectional product dissociation), and optionally three Parameters if *klist* was given as plain numbers.

Notes

When passing a MonomerPattern for *enzyme* or *substrate*, do not include *e_site* or *s_site* in the respective patterns. In addition, do not include the state of the modification site on the substrate. The macro will handle this.

Examples

Using a single Monomer for substrate and product with a state change:

```
Monomer('Kinase', ['b'])
Monomer('Substrate', ['b', 'y'], {'y': ('U', 'P')})
catalyze_state(Kinase, 'b', Substrate, 'b', 'y', 'U', 'P',
               (1e-4, 1e-1, 1))
```

Execution:

```

>>> Model()
<Model '_interactive_' ...>
>>> Monomer('Kinase', ['b'])
Monomer('Kinase', ['b'])
>>> Monomer('Substrate', ['b', 'y'], {'y': ('U', 'P')})
Monomer('Substrate', ['b', 'y'], {'y': ('U', 'P')})
>>> catalyze_state(Kinase, 'b', Substrate, 'b', 'y', 'U', 'P', (1e-4, 1e-1, 1))
ComponentSet([
  Rule('bind_Kinase_SubstrateU_to_KinaseSubstrateU',
    Kinase(b=None) + Substrate(b=None, y='U') | Kinase(b=1) % Substrate(b=1, y='U
↪'),
    bind_Kinase_SubstrateU_to_KinaseSubstrateU_kf,
    bind_Kinase_SubstrateU_to_KinaseSubstrateU_kr),
  Parameter('bind_Kinase_SubstrateU_to_KinaseSubstrateU_kf', 0.0001),
  Parameter('bind_Kinase_SubstrateU_to_KinaseSubstrateU_kr', 0.1),
  Rule('catalyze_KinaseSubstrateU_to_Kinase_SubstrateP',
    Kinase(b=1) % Substrate(b=1, y='U') >> Kinase(b=None) + Substrate(b=None, y='P
↪'),
    catalyze_KinaseSubstrateU_to_Kinase_SubstrateP_kc),
  Parameter('catalyze_KinaseSubstrateU_to_Kinase_SubstrateP_kc', 1.0),
])

```

`pysb.macros.degrade(species, kdeg)`

Generate a reaction which degrades a species.

Note that *species* is not required to be “concrete”.

Parameters

species

[Monomer, MonomerPattern or ComplexPattern] The species to synthesize. If a Monomer, sites are considered as unbound and in their default state. If a pattern, must be concrete.

kdeg

[Parameter or number] Degradation rate. If a Parameter is passed, it will be used directly in the generated Rule. If a number is passed, a Parameter will be created with an automatically generated name based on the names and site states of the components of *species* and this parameter will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains the unidirectional degradation Rule and optionally a Parameter if *ksynth* was given as a number.

Examples

Degrade all B, even bound species:

```
Model()
Monomer('B', ['x'])
degrade(B(), 1e-6)
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('B', ['x'])
Monomer('B', ['x'])
>>> degrade(B(), 1e-6)
ComponentSet([
  Rule('degrade_B', B() >> None, degrade_B_k),
  Parameter('degrade_B_k', 1e-06),
])
```

`pysb.macros.drug_binding(drug, d_site, substrate, s_site, t_action, klist)`

Generate the reversible binding reaction `DRUG + SUBSTRATE | DRUG:SUBSTRATE` that only gets triggered when the simulation reaches the time point `t_action`. The idea of this macro is to mimic experimental settings when a reaction is started and later on some kind of perturbation is added to the system.

Warning: This macro only works when a model is simulated using a deterministic simulator.

Parameters

drug, substrate: Monomer or MonomerPattern

Monomers participating in the binding reaction.

d_site, s_site: string

The names of the sites on s1 and s2 used for binding.

t_action: float

Time of the simulation at which the drug is added

klist: list of 2 Parameters or list of 2 numbers

Forward and reverse rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of S1 and S2 and these parameters will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains the bidirectional binding Rule, the time monomer, Parameter rate of time creation, Rule to simulate passing of time, time Observable, two Expression rates that take into account when the interaction between the drug and that substrate start to occur and optionally two Parameters if `klist` was given as numbers as numbers

Examples

Binding between drug and substrate::

```
Model() Monomer('drug', ['b']) Monomer('substrate', ['b']) drug_binding(drug(), 'b', substrate(), 'b', 10, [2,4])
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('drug', ['b'])
Monomer('drug', ['b'])
>>> Monomer('substrate', ['b'])
Monomer('substrate', ['b'])
>>> drug_binding(drug(), 'b', substrate(), 'b', 10, [0.1, 0.01])
ComponentSet([
  Rule('bind_drug_substrate_to_drugsubstrate', drug(b=None) + substrate(b=None) |
  ↪ drug(b=1) % substrate(b=1), kf_expr_drug_substrate, kr_expr_drug_substrate),
  Parameter('kf_drug_substrate', 0.1),
  Parameter('kr_drug_substrate', 0.01),
  Rule('synthesize__t', None >> __t(), __k_t),
  Monomer('__t'),
  Parameter('__k_t', 1.0),
  Observable('t', __t()),
  Expression('kf_expr_drug_substrate', Piecewise((kf_drug_substrate, t > 10), (0,
  ↪ True))),
  Expression('kr_expr_drug_substrate', Piecewise((kr_drug_substrate, t > 10), (0,
  ↪ True))),
])
```

`pysb.macros.equilibrate(s1, s2, klist)`

Generate the unimolecular reversible equilibrium reaction $S1 \rightleftharpoons S2$.

Parameters

s1, s2

[Monomer or MonomerPattern] S1 and S2 in the above reaction.

klist

[list of 2 Parameters or list of 2 numbers] Forward ($S1 \rightarrow S2$) and reverse rate constants (in that order). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of S1 and S2 and these parameters will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains one reversible Rule and optionally two Parameters if klist was given as plain numbers.

Examples

Simple two-state equilibrium between A and B:

```
Model()
Monomer('A')
Monomer('B')
equilibrate(A(), B(), [1, 1])
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('A')
Monomer('A')
>>> Monomer('B')
Monomer('B')
>>> equilibrate(A(), B(), [1, 1])
ComponentSet([
  Rule('equilibrate_A_to_B', A() | B(), equilibrate_A_to_B_kf, equilibrate_A_to_B_
↪kr),
  Parameter('equilibrate_A_to_B_kf', 1.0),
  Parameter('equilibrate_A_to_B_kr', 1.0),
])
```

`pysb.macros.pore_bind(subunit, sp_site1, sp_site2, sc_site, size, cargo, c_site, klist)`

Generate rules to bind a monomer to a circular homomeric pore.

The pore structure is defined by the *pore_species* macro – *subunit* monomers bind to each other from *sp_site1* to *sp_site2* to form a closed ring. The binding reaction takes the form *pore* + *cargo* | *pore:cargo*.

Parameters

subunit

[Monomer or MonomerPattern] Subunit of which the pore is composed.

sp_site1, sp_site2

[string] Names of the sites where one copy of *subunit* binds to the next.

sc_site

[string] Name of the site on *subunit* where it binds to the cargo *cargo*.

size

[integer] Number of subunits in the pore at which binding will occur.

cargo

[Monomer or MonomerPattern] Cargo that binds to the pore complex.

c_site

[string] Name of the site on *cargo* where it binds to *subunit*.

klist

[list of Parameters or numbers] List containing forward and reverse rate constants for the binding reaction (in that order). Rate constants should either be both Parameter objects or both numbers. If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the subunit, the pore size and the cargo, and these parameters will be included at the end of the returned component list.

Examples

Specify that a cargo molecule can bind reversibly to a 3-membered pore:

```
Model()
Monomer('Unit', ['p1', 'p2', 'sc_site'])
Monomer('Cargo', ['c_site'])
pore_bind(Unit, 'p1', 'p2', 'sc_site', 3,
          Cargo(), 'c_site', [1e-4, 1e-1, 1])
```

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('Unit', ['p1', 'p2', 'sc_site'])
Monomer('Unit', ['p1', 'p2', 'sc_site'])
>>> Monomer('Cargo', ['c_site'])
Monomer('Cargo', ['c_site'])
>>> pore_bind(Unit, 'p1', 'p2', 'sc_site', 3,
...           Cargo(), 'c_site', [1e-4, 1e-1, 1])
ComponentSet([
  Rule('pore_bind_Unit_3_Cargo',
    MatchOnce(Unit(p1=3, p2=1, sc_site=None) %
      Unit(p1=1, p2=2, sc_site=None) %
      Unit(p1=2, p2=3, sc_site=None)) +
    Cargo(c_site=None) |
    MatchOnce(Unit(p1=3, p2=1, sc_site=4) %
      Unit(p1=1, p2=2, sc_site=None) %
      Unit(p1=2, p2=3, sc_site=None) %
      Cargo(c_site=4)),
    pore_bind_Unit_3_Cargo_kf, pore_bind_Unit_3_Cargo_kr),
  Parameter('pore_bind_Unit_3_Cargo_kf', 0.0001),
  Parameter('pore_bind_Unit_3_Cargo_kr', 0.1),
])
```

`pysb.macros.pore_transport(subunit, sp_site1, sp_site2, sc_site, min_size, max_size, csource, c_site, cdest, ktable)`

Generate rules to transport cargo through a circular homomeric pore.

The pore structure is defined by the *pore_species* macro – *subunit* monomers bind to each other from *sp_site1* to *sp_site2* to form a closed ring. The transport reaction is modeled as a catalytic process of the form *pore* + *csource* | *pore:csource* >> *pore* + *cdest*

Parameters

subunit

[Monomer or MonomerPattern] Subunit of which the pore is composed.

sp_site1, sp_site2

[string] Names of the sites where one copy of *subunit* binds to the next.

sc_site

[string] Name of the site on *subunit* where it binds to the cargo *csource*.

min_size, max_size

[integer] Minimum and maximum number of subunits in the pore at which transport will occur.

csource

[Monomer or MonomerPattern] Cargo “source”, i.e. the entity to be transported.

c_site

[string] Name of the site on *csource* where it binds to *subunit*.

cdest

[Monomer or MonomerPattern] Cargo “destination”, i.e. the resulting state after the transport event.

ktable

[list of lists of Parameters or numbers] Table of forward, reverse and catalytic rate constants for the transport reactions. The outer list must be of length *max_size* - *min_size* + 1, and the inner lists must all be of length 3. In the outer list, the first element corresponds to the transport through the pore of size *min_size* and the last element to that of size *max_size*. Each inner list contains the forward, reverse and catalytic rate constants (in that order) for the corresponding transport reaction, and each of these pairs must comprise solely Parameter objects or solely numbers (never some of each). If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the subunit, the pore size and the cargo, and these parameters will be included at the end of the returned component list.

Examples

Specify that a three-membered pore is capable of transporting cargo from the mitochondria to the cytoplasm:

```
Model()
Monomer('Unit', ['p1', 'p2', 'sc_site'])
Monomer('Cargo', ['c_site', 'loc'], {'loc': ['mito', 'cyto']})
pore_transport(Unit, 'p1', 'p2', 'sc_site', 3, 3,
               Cargo(loc='mito'), 'c_site', Cargo(loc='cyto'),
               [[1e-4, 1e-1, 1]])
```

Generates two rules—one (reversible) binding rule and one transport rule—and the three associated parameters.

Execution:

```
>>> Model()
<Model '_interactive_' ...>
>>> Monomer('Unit', ['p1', 'p2', 'sc_site'])
Monomer('Unit', ['p1', 'p2', 'sc_site'])
>>> Monomer('Cargo', ['c_site', 'loc'], {'loc': ['mito', 'cyto']})
Monomer('Cargo', ['c_site', 'loc'], {'loc': ['mito', 'cyto']})
>>> pore_transport(Unit, 'p1', 'p2', 'sc_site', 3, 3,
...               Cargo(loc='mito'), 'c_site', Cargo(loc='cyto'),
...               [[1e-4, 1e-1, 1]])
ComponentSet([
  Rule('pore_transport_complex_Unit_3_Cargomito',
    MatchOnce(Unit(p1=3, p2=1, sc_site=None) %
      Unit(p1=1, p2=2, sc_site=None) %
      Unit(p1=2, p2=3, sc_site=None)) +
    Cargo(c_site=None, loc='mito') |
    MatchOnce(Unit(p1=3, p2=1, sc_site=4) %
      Unit(p1=1, p2=2, sc_site=None) %
      Unit(p1=2, p2=3, sc_site=None) %
```

(continues on next page)

(continued from previous page)

```

        Cargo(c_site=4, loc='mito')),
        pore_transport_complex_Unit_3_Cargomito_kf,
        pore_transport_complex_Unit_3_Cargomito_kr),
    Parameter('pore_transport_complex_Unit_3_Cargomito_kf', 0.0001),
    Parameter('pore_transport_complex_Unit_3_Cargomito_kr', 0.1),
    Rule('pore_transport_dissociate_Unit_3_Cargocyto',
        MatchOnce(Unit(p1=3, p2=1, sc_site=4) %
            Unit(p1=1, p2=2, sc_site=None) %
            Unit(p1=2, p2=3, sc_site=None) %
            Cargo(c_site=4, loc='mito')) >>
        MatchOnce(Unit(p1=3, p2=1, sc_site=None) %
            Unit(p1=1, p2=2, sc_site=None) %
            Unit(p1=2, p2=3, sc_site=None)) +
            Cargo(c_site=None, loc='cyto'),
        pore_transport_dissociate_Unit_3_Cargocyto_kc),
    Parameter('pore_transport_dissociate_Unit_3_Cargocyto_kc', 1.0),
    ])

```

`pysb.macros.synthesize(species, ksynth)`

Generate a reaction which synthesizes a species.

Note that *species* must be “concrete”, i.e. the state of all sites in all of its monomers must be specified. No site may be left unmentioned.

Parameters

species

[Monomer, MonomerPattern or ComplexPattern] The species to synthesize. If a Monomer, sites are considered as unbound and in their default state. If a pattern, must be concrete.

ksynth

[Parameters or number] Synthesis rate. If a Parameter is passed, it will be used directly in the generated Rule. If a number is passed, a Parameter will be created with an automatically generated name based on the names and site states of the components of *species* and this parameter will be included at the end of the returned component list.

Returns

components

[ComponentSet] The generated components. Contains the unidirectional synthesis Rule and optionally a Parameter if *ksynth* was given as a number.

Examples

Synthesize A with site x unbound and site y in state ‘e’:

```

Model()
Monomer('A', ['x', 'y'], {'y': ['e', 'f']})
synthesize(A(x=None, y='e'), 1e-4)

```

Execution:

```

>>> Model()
<Model '_interactive_' ...>
>>> Monomer('A', ['x', 'y'], {'y': ['e', 'f']})
Monomer('A', ['x', 'y'], {'y': ['e', 'f']})
>>> synthesize(A(x=None, y='e'), 1e-4)
ComponentSet([
  Rule('synthesize_Ae', None >> A(x=None, y='e'), synthesize_Ae_k),
  Parameter('synthesize_Ae_k', 0.0001),
])

```

pysb.macros.synthesize_degrade_table(table)

Generate a table of synthesis and degradation reactions.

Given a list of species, calls the *synthesize* and *degrade* macros on each one. The species and the parameter values are passed as a list of lists (i.e. a table) with each inner list consisting of the species, forward and reverse rates (in that order).

Each species' associated pair of rates may be either Parameters or numbers. If Parameters are passed, they will be used directly in the generated Rules. If numbers are passed, Parameters will be created with automatically generated names based on the names and states of the relevant species and these parameters will be included in the returned component list. To omit any individual reaction, pass None in place of the corresponding parameter.

Note that any *species* with a non-None synthesis rate must be “concrete”.

Parameters

table

[list of lists] Table of species and rates, as described above.

Returns

components

[ComponentSet] The generated components. Contains the unidirectional synthesis and degradation Rules and optionally the Parameters for any rates given as numbers.

Examples

Specify synthesis and degradation reactions for A and B in a table:

```

Model()
Monomer('A', ['x', 'y'], {'y': ['e', 'f']})
Monomer('B', ['x'])
synthesize_degrade_table([[A(x=None, y='e'), 1e-4, 1e-6],
                          [B(), None, 1e-7]])

```

Execution:

```

>>> Model()
<Model '_interactive_' ...>
>>> Monomer('A', ['x', 'y'], {'y': ['e', 'f']})
Monomer('A', ['x', 'y'], {'y': ['e', 'f']})
>>> Monomer('B', ['x'])
Monomer('B', ['x'])
>>> synthesize_degrade_table([[A(x=None, y='e'), 1e-4, 1e-6],
...                             [B(), None, 1e-7]])
ComponentSet([

```

(continues on next page)

(continued from previous page)

```

Rule('synthesize_Ae', None >> A(x=None, y='e'), synthesize_Ae_k),
Parameter('synthesize_Ae_k', 0.0001),
Rule('degrade_Ae', A(x=None, y='e') >> None, degrade_Ae_k),
Parameter('degrade_Ae_k', 1e-06),
Rule('degrade_B', B() >> None, degrade_B_k),
Parameter('degrade_B_k', 1e-07),
])

```

4.9 Pattern matching against PySB models (pysb.pattern)

class pysb.pattern.FilterPredicate

Base class for building predicates

For use with `pysb.core.ComponentSet.filter()`.

class pysb.pattern.Function(*regex*)

Predicate to filter a ComponentSet by function where components are defined

class pysb.pattern.Module(*regex*)

Predicate to filter a ComponentSet by module where components are defined

class pysb.pattern.Name(*regex*)

Predicate to filter a ComponentSet by regular expression name search

Note that this uses `re.search` which matches anywhere in the component name. Use `^` to explicitly anchor the match to the beginning.

class pysb.pattern.Pattern(*pattern*)

Predicate to filter a ComponentSet by matching a ComplexPattern

See `pysb.core.ComponentSet.filter()` for examples.

class pysb.pattern.ReactionPatternMatcher(*model*, *species_pattern_matcher=None*)

Match a pattern against a model's reactions list

Methods are provided to match against reaction reactants, products or both. Searches can be Monomers, MonomerPatterns, ComplexPatterns or ReactionPatterns.

Examples

Create a PatternMatcher for the EARM 1.0 model

```

>>> from pysb.examples.earm_1_0 import model
>>> from pysb.bng import generate_equations
>>> from pysb.pattern import ReactionPatternMatcher
>>> generate_equations(model)
>>> rpm = ReactionPatternMatcher(model)

```

Assign some monomers to variables (only needed when importing a model instead of defining one interactively)

```

>>> AMito, mCytoC, mSmac, cSmac = [model.monomers[m] for m in
    ('AMito', 'mCytoC', 'mSmac', 'cSmac')]

```

Search using a Monomer

```
>>> rpm.match_products(mSmac)
[Rxn (reversible):
  Reactants: {'__s15': mSmac(b=None), '__s45': AMito(b=None)}
  Products: {'__s47': AMito(b=1) % mSmac(b=1)}
  Rate: kf21*__s15*__s45 - kr21*__s47
  Rules: [Rule('bind_mSmac_AMito', AMito(b=None) + mSmac(b=None) |
              AMito(b=1) % mSmac(b=1), kf21, kr21)]]
```

Search using a MonomerPattern

```
>>> rpm.match_reactants(AMito(b=ANY))
[Rxn (one-way):
  Reactants: {'__s46': AMito(b=1) % mCytoC(b=1)}
  Products: {'__s45': AMito(b=None), '__s48': ACytoC(b=None)}
  Rate: kc20*__s46
  Rules: [Rule('produce_ACytoC_via_AMito', AMito(b=1) % mCytoC(b=1) >>
              AMito(b=None) + ACytoC(b=None), kc20)],
  Rxn (one-way):
  Reactants: {'__s47': AMito(b=1) % mSmac(b=1)}
  Products: {'__s45': AMito(b=None), '__s49': ASmac(b=None)}
  Rate: kc21*__s47
  Rules: [Rule('produce_ASmac_via_AMito', AMito(b=1) % mSmac(b=1) >>
              AMito(b=None) + ASmac(b=None), kc21)]]
```

```
>>> rpm.match_products(cSmac(b=ANY))
[Rxn (reversible):
  Reactants: {'__s7': XIAP(b=None), '__s51': cSmac(b=None)}
  Products: {'__s53': XIAP(b=1) % cSmac(b=1)}
  Rate: kf28*__s51*__s7 - kr28*__s53
  Rules: [Rule('inhibit_cSmac_by_XIAP', cSmac(b=None) + XIAP(b=None) |
              cSmac(b=1) % XIAP(b=1), kf28, kr28)]]
```

Search using a ComplexPattern

```
>>> rpm.match_reactants(AMito() % mSmac())
[Rxn (one-way):
  Reactants: {'__s47': AMito(b=1) % mSmac(b=1)}
  Products: {'__s45': AMito(b=None), '__s49': ASmac(b=None)}
  Rate: kc21*__s47
  Rules: [Rule('produce_ASmac_via_AMito', AMito(b=1) % mSmac(b=1) >>
              AMito(b=None) + ASmac(b=None), kc21)]]
```

```
>>> rpm.match_reactions(AMito(b=3) % mCytoC(b=3))
[Rxn (reversible):
  Reactants: {'__s14': mCytoC(b=None), '__s45': AMito(b=None)}
  Products: {'__s46': AMito(b=1) % mCytoC(b=1)}
  Rate: kf20*__s14*__s45 - kr20*__s46
  Rules: [Rule('bind_mCytoC_AMito', AMito(b=None) + mCytoC(b=None) |
              AMito(b=1) % mCytoC(b=1), kf20, kr20)],
  Rxn (one-way):
  Reactants: {'__s46': AMito(b=1) % mCytoC(b=1)}
```

(continues on next page)

(continued from previous page)

```

Products: {'__s45': AMito(b=None), '__s48': ACytoC(b=None)}
Rate: kc20*__s46
Rules: [Rule('produce_ACytoC_via_AMito', AMito(b=1) % mCytoC(b=1) >>
            AMito(b=None) + ACytoC(b=None), kc20)]

```

class pysb.pattern.**RulePatternMatcher**(model)

Match a pattern against a model's species list

Methods are provided to match against rule reactants, products or both. Searches can be Monomers, Monomer-Patterns, ComplexPatterns or ReactionPatterns.

Examples

Create a PatternMatcher for the EARM 1.0 model

```

>>> from pysb.examples.earm_1_0 import model
>>> from pysb.pattern import RulePatternMatcher
>>> rpm = RulePatternMatcher(model)

```

Assign some monomers to variables (only needed when importing a model instead of defining one interactively)

```

>>> AMito, mCytoC, mSmac, cSmac = [model.monomers[m] for m in ('AMito',
↪ 'mCytoC', 'mSmac', 'cSmac')]

```

Search using a Monomer

```

>>> rpm.match_reactants(AMito)
[Rule('bind_mCytoC_AMito', AMito(b=None) + mCytoC(b=None) |
      AMito(b=1) % mCytoC(b=1), kf20, kr20),
Rule('produce_ACytoC_via_AMito', AMito(b=1) % mCytoC(b=1) >>
      AMito(b=None) + ACytoC(b=None), kc20),
Rule('bind_mSmac_AMito', AMito(b=None) + mSmac(b=None) |
      AMito(b=1) % mSmac(b=1), kf21, kr21),
Rule('produce_ASmac_via_AMito', AMito(b=1) % mSmac(b=1) >>
      AMito(b=None) + ASmac(b=None), kc21)]

```

```

>>> rpm.match_products(mSmac)
[Rule('bind_mSmac_AMito', AMito(b=None) + mSmac(b=None) |
      AMito(b=1) % mSmac(b=1), kf21, kr21)]

```

Search using a MonomerPattern

```

>>> rpm.match_reactants(AMito(b=1))
[Rule('produce_ACytoC_via_AMito', AMito(b=1) % mCytoC(b=1) >>
      AMito(b=None) + ACytoC(b=None), kc20),
Rule('produce_ASmac_via_AMito', AMito(b=1) % mSmac(b=1) >>
      AMito(b=None) + ASmac(b=None), kc21)]

```

```

>>> rpm.match_rules(cSmac(b=1))
[Rule('inhibit_cSmac_by_XIAP', cSmac(b=None) + XIAP(b=None) |
      cSmac(b=1) % XIAP(b=1), kf28, kr28)]

```

Search using a ComplexPattern

```
>>> rpm.match_reactants(AMito() % mSmac())
[Rule('produce_ASmac_via_AMito', AMito(b=1) % mSmac(b=1) >>
  AMito(b=None) + ASmac(b=None), kc21)]
```

```
>>> rpm.match_rules(AMito(b=1) % mCytoC(b=1))
[Rule('bind_mCytoC_AMito', AMito(b=None) + mCytoC(b=None) |
  AMito(b=1) % mCytoC(b=1), kf20, kr20),
Rule('produce_ACytoC_via_AMito', AMito(b=1) % mCytoC(b=1) >>
  AMito(b=None) + ACytoC(b=None), kc20)]
```

Search using a ReactionPattern

```
>>> rpm.match_reactants(mCytoC() + mSmac())
[]
```

```
>>> rpm.match_reactants(AMito() + mCytoC())
[Rule('bind_mCytoC_AMito', AMito(b=None) + mCytoC(b=None) |
  AMito(b=1) % mCytoC(b=1), kf20, kr20)]
```

class `pysb.pattern.SpeciesPatternMatcher(model, species=None)`

Match a pattern against a model's species list

Examples

Create a PatternMatcher for the EARM 1.0 model

```
>>> from pysb.examples.earm_1_0 import model
>>> from pysb.bng import generate_equations
>>> from pysb.pattern import SpeciesPatternMatcher
>>> from pysb import ANY, WILD, Model, Monomer, as_complex_pattern
>>> generate_equations(model)
>>> spm = SpeciesPatternMatcher(model)
```

Assign two monomers to variables (only needed when importing a model instead of defining one interactively)

```
>>> Bax4 = model.monomers['Bax4']
>>> Bcl2 = model.monomers['Bcl2']
```

Search using a Monomer

```
>>> spm.match(Bax4)
[Bax4(b=None), Bax4(b=1) % Bcl2(b=1), Bax4(b=1) % Mito(b=1)]
>>> spm.match(Bcl2)
[Bax2(b=1) % Bcl2(b=1),
Bax4(b=1) % Bcl2(b=1),
Bcl2(b=None),
Bcl2(b=1) % MBax(b=1)]
```

Search using a MonomerPattern (ANY and WILD keywords can be used)

```
>>> spm.match(Bax4(b=WILD))
[Bax4(b=None), Bax4(b=1) % Bcl2(b=1), Bax4(b=1) % Mito(b=1)]
```

(continues on next page)

(continued from previous page)

```
>>> spm.match(Bc12(b=ANY))
[Bax2(b=1) % Bc12(b=1), Bax4(b=1) % Bc12(b=1), Bc12(b=1) % MBax(b=1)]
```

Search using a ComplexPattern

```
>>> spm.match(Bax4(b=1) % Bc12(b=1))
[Bax4(b=1) % Bc12(b=1)]
>>> spm.match(Bax4() % Bc12())
[Bax4(b=1) % Bc12(b=1)]
```

Contrived example to test a site with both a bond and state defined

```
>>> model = Model(_export=False)
>>> A = Monomer('A', ['a'], {'a': ['u', 'p']}, _export=False)
>>> model.add_component(A)
>>> species = [
    ↪ 'u'),
    ↪ A(a=1),
    ↪ A(a=('u', 1)),
    ↪ 1))
    ]
>>> model.species = [as_complex_pattern(sp) for sp in species]
>>> spm2 = SpeciesPatternMatcher(model)
>>> spm2.match(A())
[A(a='u'), A(a=1) % A(a=1), A(a=('u', 1)) % A(a=('u', 1)),
 A(a=('p', 1)) % A(a=('p', 1))]
>>> spm2.match(A(a='u'))
[A(a='u')]
>>> spm2.match(A(a=('u', ANY)))
[A(a=('u', 1)) % A(a=('u', 1))]
>>> spm2.match(A(a=('u', WILD)))
[A(a='u'), A(a=('u', 1)) % A(a=('u', 1))]
```

add_species(*species*, *check_duplicate=True*)

Add a species to the search list without adding to the model

Parameters

species

[ComplexPattern] A concrete ComplexPattern (molecular species) to add to the search list

check_duplicate

[bool, optional] If True, check the species list to make sure the new species is not already in the list

match(*pattern*, *index=False*, *exact=False*, *counts=False*)

Match a pattern against the list of species

Parameters

pattern: pysb.Monomer or pysb.MonomerPattern or pysb.ComplexPattern

index: bool

If True, return species numerical index, rather than species itself

exact: bool

Treat Match as exact equivalence, not a pattern match (i.e. must be concrete if a

MonomerPattern or ComplexPattern)

counts: bool

If True, return match counts for the search pattern within each species.

Returns

list of pysb.ComplexPattern or list of int

A list of species matching the pattern is returned, unless `index=True`, in which case a list of the numerical indices of matching species is returned instead

Examples

```
>>> from pysb.examples import earm_1_0
>>> from pysb.bng import generate_equations
>>> model = earm_1_0.model
>>> generate_equations(model)
>>> spm = SpeciesPatternMatcher(model)
>>> L = model.monomers['L']
>>> spm.match(L())
[L(b=None), L(b=1) % pR(b=1)]
```

rule_firing_species(*rules_to_consider=None, include_reverse=True*)

Return the species which match the reactants of a set of rules

Parameters

rules_to_consider: list of pysb.Rule or None

A list of rules to use. If None, use all rules in the model.

include_reverse: bool, optional

For reversible rules, include species triggering the rule in reverse

Returns

collections.OrderedDict

Dictionary of PySB rules whose reactants contain at least one of the species in the model. Keys are PySB rules, values are a list of lists. Each outer list corresponding to each ComplexPattern in the ReactantPattern (or ReactantPattern and ProductPattern, if rule is reversible). Each inner list contains the list of species matching the corresponding ComplexPattern.

Examples

```
>>> from pysb.examples import robertson
>>> from pysb.bng import generate_equations
>>> model = robertson.model
>>> generate_equations(model)
>>> spm = SpeciesPatternMatcher(model)
```

Get a list of species which fire each rule:

```
>>> spm.rule_firing_species()
OrderedDict([(Rule('A_to_B', A() >> B(), k1), [[A()]]),
 (Rule('BB_to_BC', B() + B() >> B() + C(), k2), [[B()], [B()]]),
 (Rule('BC_to_AC', B() + C() >> A() + C(), k3), [[B()], [C()]])])
```

species_fired_by_reactant_pattern(*reaction_pattern*)

Get list of species matching a reactant pattern

Parameters

reaction_pattern: pysb.ReactionPattern

Returns

list of lists of pysb.ComplexPattern

List of lists of species matching each ComplexPattern in the ReactantPattern.

Examples

```
>>> from pysb.examples import bax_pore
>>> from pysb.bng import generate_equations
>>> model = bax_pore.model
>>> generate_equations(model)
>>> spm = SpeciesPatternMatcher(model)
```

Get a list of species which fire each rule:

```
>>> rxn_pat = model.rules['bax_dim'].reactant_pattern
>>> print(rxn_pat)
BAX(t1=None, t2=None) + BAX(t1=None, t2=None)
```

```
>>> spm.species_fired_by_reactant_pattern(rxn_pat)
[[BAX(t1=None, t2=None, inh=None),
  BAX(t1=None, t2=None, inh=1) % MCL1(b=1)],
 [BAX(t1=None, t2=None, inh=None),
  BAX(t1=None, t2=None, inh=1) % MCL1(b=1)]]
```

pysb.pattern.check_dangling_bonds(*pattern*)

Check for dangling bonds in a PySB ComplexPattern/ReactionPattern

Raises a DanglingBondError if a dangling bond is found

pysb.pattern.get_bonds_in_pattern(*pat*)

Return the set of integer bond numbers used in a pattern

To return as a list (with duplicates), use [get_half_bonds_in_pattern\(\)](#)

Parameters

pat

[ComplexPattern, MonomerPattern, or None] A pattern from which bond numberings are extracted

Returns

set

Bond numbers used in the supplied pattern

Examples

```
>>> A = Monomer('A', ['b1', 'b2'], _export=False)
>>> get_bonds_in_pattern(A(b1=None, b2=None)) == set()
True
>>> get_bonds_in_pattern(A(b1=1) % A(b2=1)) == {1}
True
>>> get_bonds_in_pattern(A(b1=1) % A(b1=2, b2=1) % A(b1=2)) == {1, 2}
True
```

`pysb.pattern.get_half_bonds_in_pattern(pat)`

Return the list of integer bond numbers used in a pattern

To return as a set, use `get_bonds_in_pattern()`.

Parameters

pat

[ComplexPattern, MonomerPattern, or None] A pattern from which bond numberings are extracted

Returns

list

Bond numbers used in the supplied pattern

Examples

```
>>> A = Monomer('A', ['b1', 'b2'], _export=False)
>>> get_half_bonds_in_pattern(A(b1=None, b2=None))
[]
>>> get_half_bonds_in_pattern(A(b1=1) % A(b2=1))
[1, 1]
```

`pysb.pattern.match_complex_pattern(pattern, candidate, exact=False, count=False)`

Compare two ComplexPatterns against each other

Parameters

pattern: `pysb.ComplexPattern`

candidate: `pysb.Complex.Pattern`

exact: `bool`

Set to True for exact matches (i.e. species equivalence, or exact graph isomorphism). Set to False to compare as a pattern (i.e. subgraph isomorphism).

count: `bool`

Provide match counts for pattern in candidate

Returns

True if pattern matches candidate, False otherwise

`pysb.pattern.match_reaction_pattern(pattern, candidate)`

Compare two ReactionPatterns against each other

This function tests that every ComplexPattern in pattern has a matching ComplexPattern in candidate. If there's a one-to-one mapping of ComplexPattern matches, this is straightforward. Otherwise, we need to check for a maximum matching - a graph theory term referring to the maximum number of edges possible in a bipartite graph

(representing ComplexPattern compatibility between pattern and candidate) without overlapping nodes. If every ComplexPattern in pattern has a match, then return True, otherwise return False. This algorithm is polynomial time (although the ComplexPattern isomorphism comparisons using `match_complex_pattern` are not).

Parameters

pattern: `pysb.ReactionPattern`
candidate: `pysb.ReactionPattern`

Returns

True if pattern matches candidate, False otherwise.

`pysb.pattern.monomers_from_pattern(pattern)`

Return the set of monomers used in a pattern

4.10 Visualizing model structure

PySB currently includes a handful of tools for visualizing the structure of models. These can be supplemented with existing tools for visualizing the structure of rule-based models (e.g., contact maps and influence maps for Kappa models).

4.10.1 Render a model's reaction network (`pysb.tools.render_reactions`)

Usage

Usage: `python -m pysb.tools.render_reactions mymodel.py > mymodel.dot`

If your model uses species as expression rates, you can visualize these interactions by including the `--include-rate-species` option:

```
python -m pysb.tools.render_reactions --include-rate-species mymodel.py > mymodel.dot
```

Renders the reactions produced by a model into the “dot” graph format which can be visualized with Graphviz.

To create a PDF from the .dot file, use the “dot” command from Graphviz:

```
dot mymodel.dot -T pdf -O
```

This will create `mymodel.dot.pdf`. You can also change the “dot” command to one of the other Graphviz drawing tools for a different type of layout. Note that you can pipe the output of `render_reactions` straight into Graphviz without creating an intermediate .dot file, which is especially helpful if you are making continuous changes to the model and need to visualize your changes repeatedly:

```
python -m pysb.tools.render_reactions mymodel.py | dot -T pdf -o mymodel.pdf
```


Note that some PDF viewers will auto-reload a changed PDF, so you may not even need to manually reopen it every time you rerun the tool.

Output for Robertson example model

The Robertson example model (in `pysb.examples.robertson`) contains the following three reactions:

- $A \rightarrow B$
- $B + B \rightarrow B + C$
- $C + B \rightarrow C + A$

The reaction network diagram for this system as generated by this module and rendered using `dot` is shown below:

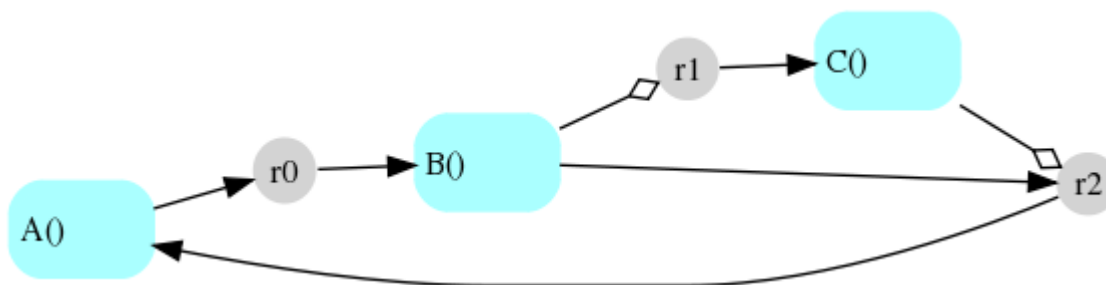

Circular nodes (`r0`, `r1` and `r2`) indicate reactions; square nodes (`A()`, `B()` and `C()`) indicate species. Incoming arrows from a species node to a reaction node indicate that the species is a reactant; outgoing arrows from a reaction node to a species node indicate that the species is a product. A hollow diamond-tipped arrow from a species to a reaction indicates that the species is involved as both a reactant and a product, i.e., it serves as a “modifier” (enzyme or catalyst).

`pysb.tools.render_reactions.run(model, include_rate_species=False)`

Render the reactions produced by a model into the “dot” graph format.

Parameters

model

[`pysb.core.Model`] The model to render.

include_rate_species

[`bool`]

If `True`, enable multigraph and add dashed edges from species used in expression rates to the node representing the reaction.

Returns

string

The dot format output.

4.10.2 Render a model’s species (`pysb.tools.render_species`)

Usage: `python -m pysb.tools.render_species mymodel.py > mymodel.dot`

Renders the species from a model into the “dot” graph format which can be visualized with Graphviz.

To create a PDF from the `.dot` file, use the Graphviz tools in the following command pipeline:

```
ccomps -x mymodel.dot | dot | gvpack -m0 | neato -n2 -T pdf -o mymodel.pdf
```

You can also change the “dot” command to “circo” or “sfdp” for a different type of layout. Note that you can pipe the output of `render_species` straight into a Graphviz command pipeline without creating an intermediate `.dot` file, which is especially helpful if you are making continuous changes to the model and need to visualize your changes repeatedly:

```
python -m pysb.tools.render_species mymodel.py | ccomps -x | dot |
gypack -m0 | neato -n2 -T pdf -o mymodel.pdf
```

Note that some PDF viewers will auto-reload a changed PDF, so you may not even need to manually reopen it every time you rerun the tool.

```
pysb.tools.render_species.run(model)
```

Render the species from a model into the “dot” graph format.

Parameters

model

[pysb.core.Model] The model to render.

Returns

string

The dot format output.

4.11 Sensitivity analysis (pysb.tools.sensitivity_analysis)

```
class pysb.tools.sensitivity_analysis.InitialsSensitivity(*args, **kwargs)
```

Deprecated; use [PairwiseSensitivity](#) instead.

```
class pysb.tools.sensitivity_analysis.PairwiseSensitivity(solver, values_to_sample,
                                                         objective_function, observable,
                                                         sens_type='initials', sample_list=None)
```

Pairwise sensitivity analysis of model parameters

This class calculates the sensitivity of a specified model Observable to changes in pairs of initial species concentrations. The results are stored in matrices described in Attributes.

Warning: The interface for this class is considered experimental and may change without warning as PySB is updated.

Parameters

solver

[pysb.simulator.Simulator] Simulator instance used to perform models. Must be initialized with tspan argument set.

values_to_sample

[vector_like] Values to sample for each initial concentration of the model.parameters values.

objective_function

[function] A function that returns a scalar value. Used to calculate fraction of changed that is used for calculating sensitivity. See Example.

observable

[str] Observable name used in the objective_function.

sens_type: {'params', 'initials', 'all'}

Type of sensitivity analysis to perform.

sample_list: list

List of model pysb.Parameters names to be used.

References

1. Harris, L.A., Nobile, M.S., Pino, J.C., Lubbock, A.L.R., Besozzi, D., Mauri, G., Cazzaniga, P., and Lopez, C.F. 2017. GPU-powered model analysis with PySB/cupSODA. *Bioinformatics* 33, pp.3492-3494. <https://academic.oup.com/bioinformatics/article/33/21/3492/3896987>

Examples

Sensitivity analysis on the Tyson cell cycle model

```
>>> from pysb.examples.tyson_oscillator import model
>>> import numpy as np
>>> from pysb.simulator.scipyode import ScipyOdeSimulator
>>> np.set_printoptions(precision=4, suppress=True)
>>> tspan=np.linspace(0, 200, 201)
>>> observable = 'Y3'
>>> values_to_sample = [.8, 1.2]
>>> def obj_func_cell_cycle(out):
...     timestep = tspan[:-1]
...     y = out[:-1] - out[1:]
...     freq = 0
...     local_times = []
...     prev = y[0]
...     for n in range(1, len(y)):
...         if y[n] > 0 > prev:
...             local_times.append(timestep[n])
...             freq += 1
...         prev = y[n]
...     local_times = np.array(local_times)
...     local_freq = np.average(local_times)/len(local_times)*2
...     return local_freq
>>> solver = ScipyOdeSimulator(model, tspan, integrator='lsoda',
↪ integrator_options={'atol' : 1e-8,
↪ 'rtol' : 1e-8, 'mxstep' :20000})
>>> sens = PairwiseSensitivity(
↪     observable=observable,
↪     solver=solver
↪     values_to_sample=values_to_sample,
↪     objective_function=obj_func_cell_cycle,
>>> print(sens.b_matrix)
[[((0.8, 'cdc0'), (0.8, 'cdc0')) ((0.8, 'cdc0'), (1.2, 'cdc0'))
  ((0.8, 'cdc0'), (0.8, 'cyc0')) ((0.8, 'cdc0'), (1.2, 'cyc0'))]
 [[((1.2, 'cdc0'), (0.8, 'cdc0')) ((1.2, 'cdc0'), (1.2, 'cdc0'))
  ((1.2, 'cdc0'), (0.8, 'cyc0')) ((1.2, 'cdc0'), (1.2, 'cyc0'))]
 [[((0.8, 'cyc0'), (0.8, 'cdc0')) ((0.8, 'cyc0'), (1.2, 'cdc0'))
  ((0.8, 'cyc0'), (0.8, 'cyc0')) ((0.8, 'cyc0'), (1.2, 'cyc0'))]
 [[((1.2, 'cyc0'), (0.8, 'cdc0')) ((1.2, 'cyc0'), (1.2, 'cdc0'))
  ((1.2, 'cyc0'), (0.8, 'cyc0')) ((1.2, 'cyc0'), (1.2, 'cyc0'))]]
>>> sens.run()
>>> print(sens.p_matrix)
[[ 0.      0.      5.0243 -4.5381]
```

(continues on next page)

(continued from previous page)

```

[ 0.      0.      5.0243 -4.5381]
[ 5.0243  5.0243  0.      0.      ]
[-4.5381 -4.5381  0.      0.      ]]
>>> print(sens.p_prime_matrix)
[[ 0.      0.      5.0243 -4.5381]
 [ 0.      0.      5.0243 -4.5381]
 [ 0.      0.      0.      0.      ]
 [ 0.      0.      0.      0.      ]]
>>> print(sens.p_matrix - sens.p_prime_matrix)
[[ 0.      0.      0.      0.      ]
 [ 0.      0.      0.      0.      ]
 [ 5.0243  5.0243  0.      0.      ]
 [-4.5381 -4.5381  0.      0.      ]]
>>> sens.create_boxplot_and_heatplot()
>>> values_to_sample = [.9, 1.1]
>>> sens = PairwiseSensitivity(          values_to_sample=values_to_sample,
    observable=observable,             objective_function=obj_func_cell_cycle,
    solver=solver,                     sens_type='params'          )
>>> print(sens.b_matrix.shape == (14, 14))
True
>>> sens.run()
>>> print(sens.p_matrix)
[[ 0.      0.      13.6596 13.6596 24.3955  4.7909 16.4603 11.3258
   0.1621 31.2804 13.6596 13.6596 13.6596 13.6596]
 [ 0.      0.     -10.3728 -10.3728 -3.7277 -14.9803 -7.2934 -12.2416
 -18.3144  0.     -10.3728 -10.3728 -10.3728 -10.3728]
 [ 13.6596 -10.3728  0.      0.      7.3582 -6.483   3.0794 -2.269
 -10.6969 12.7261  0.      0.      0.      0.      ]
 [ 13.6596 -10.3728  0.      0.      7.3582 -6.483   3.0794 -2.269
 -10.6969 12.7261  0.      0.      0.      0.      ]
 [ 24.3955 -3.7277  7.3582  7.3582  0.      0.      10.859   5.2577
  -4.376  23.2285  7.3582  7.3582  7.3582  7.3582]
 [  4.7909 -14.9803 -6.483  -6.483  0.      0.      -3.4036 -9.0762
 -15.2185  3.8574 -6.483  -6.483 -6.483  -6.483 ]
 [ 16.4603 -7.2934  3.0794  3.0794 10.859  -3.4036  0.      0.
  -7.9417 15.5267  3.0794  3.0794  3.0794  3.0794]
 [ 11.3258 -12.2416 -2.269  -2.269  5.2577 -9.0762  0.      0.
 -13.128  10.859  -2.269  -2.269 -2.269  -2.269 ]
 [  0.1621 -18.3144 -10.6969 -10.6969 -4.376 -15.2185 -7.9417 -13.128
    0.      0.     -10.6969 -10.6969 -10.6969 -10.6969]
 [ 31.2804  0.      12.7261 12.7261 23.2285  3.8574 15.5267 10.859
    0.      0.      12.7261 12.7261 12.7261 12.7261]
 [ 13.6596 -10.3728  0.      0.      7.3582 -6.483   3.0794 -2.269
 -10.6969 12.7261  0.      0.      0.      0.      ]
 [ 13.6596 -10.3728  0.      0.      7.3582 -6.483   3.0794 -2.269
 -10.6969 12.7261  0.      0.      0.      0.      ]
 [ 13.6596 -10.3728  0.      0.      7.3582 -6.483   3.0794 -2.269
 -10.6969 12.7261  0.      0.      0.      0.      ]
 [ 13.6596 -10.3728  0.      0.      7.3582 -6.483   3.0794 -2.269
 -10.6969 12.7261  0.      0.      0.      0.      ]]
>>> print(sens.p_matrix - sens.p_prime_matrix)
[[ 0.      0.      13.6596 13.6596 17.0373 11.2739 13.3809 13.5948

```

(continues on next page)

(continued from previous page)

```

10.859 18.5543 13.6596 13.6596 13.6596 13.6596]
[ 0. 0. -10.3728 -10.3728 -11.0859 -8.4973 -10.3728 -9.9725
-7.6175 -12.7261 -10.3728 -10.3728 -10.3728 -10.3728]
[ 0. 0. 0. 0. 0. 0. 0. 0.
0. 0. 0. 0. 0. 0. ]
[ 0. 0. 0. 0. 0. 0. 0. 0.
0. 0. 0. 0. 0. 0. ]
[ 10.7358 6.6451 7.3582 7.3582 0. 0. 7.7796 7.5267
6.3209 10.5024 7.3582 7.3582 7.3582 7.3582]
[ -8.8687 -4.6075 -6.483 -6.483 0. 0. -6.483 -6.8071
-4.5215 -8.8687 -6.483 -6.483 -6.483 -6.483 ]
[ 2.8006 3.0794 3.0794 3.0794 3.5008 3.0794 0. 0.
2.7553 2.8006 3.0794 3.0794 3.0794 3.0794]
[ -2.3339 -1.8688 -2.269 -2.269 -2.1005 -2.5932 0. 0.
-2.4311 -1.8671 -2.269 -2.269 -2.269 -2.269 ]
[-13.4976 -7.9417 -10.6969 -10.6969 -11.7342 -8.7355 -11.0211 -10.859
0. 0. -10.6969 -10.6969 -10.6969 -10.6969]
[ 17.6207 10.3728 12.7261 12.7261 15.8703 10.3404 12.4473 13.128
0. 0. 12.7261 12.7261 12.7261 12.7261]
[ 0. 0. 0. 0. 0. 0. 0. 0.
0. 0. 0. 0. 0. 0. ]
[ 0. 0. 0. 0. 0. 0. 0. 0.
0. 0. 0. 0. 0. 0. ]
[ 0. 0. 0. 0. 0. 0. 0. 0.
0. 0. 0. 0. 0. 0. ]
[ 0. 0. 0. 0. 0. 0. 0. 0.
0. 0. 0. 0. 0. 0. ]]
>>> sens.create_boxplot_and_heatplot()
>>> sens = PairwiseSensitivity( values_to_sample=values_to_sample,
observable=observable, objective_function=obj_func_cell_cycle,
solver=solver, sample_list=['k1', 'cdc0'] )
>>> print(sens.b_matrix)
[[((0.9, 'k1'), (0.9, 'k1')) ((0.9, 'k1'), (1.1, 'k1'))
((0.9, 'k1'), (0.9, 'cdc0')) ((0.9, 'k1'), (1.1, 'cdc0'))]
[[((1.1, 'k1'), (0.9, 'k1')) ((1.1, 'k1'), (1.1, 'k1'))
((1.1, 'k1'), (0.9, 'cdc0')) ((1.1, 'k1'), (1.1, 'cdc0'))]
[[((0.9, 'cdc0'), (0.9, 'k1')) ((0.9, 'cdc0'), (1.1, 'k1'))
((0.9, 'cdc0'), (0.9, 'cdc0')) ((0.9, 'cdc0'), (1.1, 'cdc0'))]
[[((1.1, 'cdc0'), (0.9, 'k1')) ((1.1, 'cdc0'), (1.1, 'k1'))
((1.1, 'cdc0'), (0.9, 'cdc0')) ((1.1, 'cdc0'), (1.1, 'cdc0'))]]

```

Attributes

b_matrix: numpy.ndarray

Matrix of 2-tuples containing (perturbation, species index)

b_prime_matrix: numpy.ndarray

Same as b_matrix, only where one of the species concentrations is unchanged (i.e. with the single variable contribution removed)

index

[list] List of model parameter names that will be used in analysis

index_of_param

[dict] Dictionary that maps parameters name to index in orig_values array

objective_function

[Identical to Parameters (see above).]

orig_vals

[numpy.array] Original values of the model.Parameters.

p_matrix: numpy.ndarray

Pairwise sensitivity matrix

p_prime_matrix: numpy.ndarray

Normalized pairwise sensitivity matrix (in the sense that it contains changes from the baseline, unperturbed case)

params_to_run

[np.array] Parameter sets to be passed to simulator

create_boxplot_and_heatplot(*x_axis_label=None, save_name=None, out_dir=None, show=False*)

Heat map and box plot of sensitivities

Parameters

x_axis_label

[str, optional] label for x axis

save_name

[str, optional] name of figure to save

out_dir

[str, option] output directory to save figures

show

[bool] Show plot if True

Returns

matplotlib.figure.Figure

The matplotlib figure object for further adjustments, if required

create_individual_pairwise_plots(*save_name=None, out_dir=None, show=False*)

Single plot containing heat plot of each specie pair

Parameters

save_name

[str, optional] name ot save figure as

out_dir

[str, optional] output directory

show

[bool] show figure

Returns

matplotlib.figure.Figure

The matplotlib figure object for further adjustments, if required

create_plot_p_h_pprime(*save_name=None, out_dir=None, show=False*)

Plot of P, H(B), and P'

See [PairwiseSensitivity](#) attributes for descriptions of these matrices

Parameters

save_name
[str, optional] name to save figure as

out_dir
[str, optional] location to save figure

show
[bool] show the plot if True

Returns

matplotlib.figure.Figure
The matplotlib figure object for further adjustments, if required

run(*save_name=None, out_dir=None*)

Run sensitivity analysis

Parameters

save_name
[str, optional] prefix of saved files

out_dir
[str, optional] location to save output if required

property sensitivity_multiset

Sensitivity analysis multiset (also called “Q” matrix)

Returns

list
List of lists containing the sensitivity analysis multiset

pysb.tools.sensitivity_analysis.cartesian_product(*array_1, array_2*)

Cartesian product between two lists

Parameters

array_1
[list_like]

array_2
[list_like]

Returns

np.array
array of shape (len(array_1), len(array_2))

4.12 Importing from other formats (pysb.importers)

pysb.importers.bngl.model_from_bngl(*filename, force=False, cleanup=True*)

Convert a BioNetGen .bngl model file into a PySB Model.

Parameters

filename
[string] A BioNetGen .bngl file

force

[bool, optional] The default, False, will raise an Exception if there are any errors importing the model to PySB, e.g. due to unsupported features. Setting to True will attempt to ignore any import errors, which may lead to a model that only poorly represents the original. Use at own risk!

cleanup

[bool] Delete temporary directory on completion if True. Set to False for debugging purposes.

Notes

The following features are not supported in PySB and will cause an error if present in a .bngl file:

- Fixed species (with a \$ prefix, like \$Null)
- BNG excluded or included reaction patterns (deprecated in BNG)
- BNG local functions
- Molecules with identically named sites, such as M(1,1)
- BNG's custom rate law functions, such as MM and Sat (deprecated in BNG)

```
pysb.importers.sbml.model_from_biomodels(accession_no, force=False, cleanup=True, mirror='ebi',
                                         **kwargs)
```

Create a PySB Model based on a BioModels SBML model

Downloads file from BioModels (<https://www.ebi.ac.uk/biomodels-main/>) and runs it through `model_from_sbml()`. See that function for further details on additional arguments and implementation details. Utilizes BioNetGen's SBMLTranslator.

Parameters**accession_no**

[str] A BioModels accession number - the string 'BIOMD' followed by 10 digits, e.g. 'BIOMD0000000001'. For brevity, just the last digits will be accepted as a string, e.g. '1' is equivalent the accession number in the previous sentence.

force

[bool, optional] The default, False, will raise an Exception if there are any errors importing the model to PySB, e.g. due to unsupported features. Setting to True will attempt to ignore any import errors, which may lead to a model that only poorly represents the original. Use at own risk!

cleanup

[bool] Delete temporary directory on completion if True. Set to False for debugging purposes.

mirror

[str] Which BioModels mirror to use, either 'ebi' or 'caltech'

****kwargs: kwargs**

Keyword arguments to pass on to `sbml_translator()`

Notes

Requires the sbmlTranslator program (also known as Atomizer). If PySB was installed using “conda”, you can install sbmlTranslator using “conda install -c alubbock atomizer”. It is bundled with BioNetGen if BNG is installed by manual download and unzip.

Read the [sbmlTranslator documentation](#) for further information on sbmlTranslator’s limitations.

Examples

```
>>> from pysb.importers.sbml import model_from_biomodels
>>> model = model_from_biomodels('1')
>>> print(model)
<Model 'pysb' (monomers: 12, rules: 17, parameters: 37, expressions: 0, ...
```

`pysb.importers.sbml.model_from_sbml(filename, force=False, cleanup=True, **kwargs)`

Create a PySB Model object from an Systems Biology Markup Language (SBML) file, using BioNetGen’s [sbmlTranslator](#), which can attempt to extrapolate higher-level (rule-based) structure from an SBML source file (argument `atomize=True`). The model is first converted into BioNetGen language by sbmlTranslator, then PySB’s `BnglBuilder` class converts the BioNetGen language model into a PySB Model.

Parameters

filename

A Systems Biology Markup Language .sbml file

force

[bool, optional] The default, False, will raise an Exception if there are any errors importing the model to PySB, e.g. due to unsupported features. Setting to True will attempt to ignore any import errors, which may lead to a model that only poorly represents the original. Use at own risk!

cleanup

[bool] Delete temporary directory on completion if True. Set to False for debugging purposes.

****kwargs: kwargs**

Keyword arguments to pass on to [sbml_translator\(\)](#)

Notes

Requires the sbmlTranslator program (also known as Atomizer). If PySB was installed using “conda”, you can install sbmlTranslator using “conda install -c alubbock atomizer”. It is bundled with BioNetGen if BNG is installed by manual download and unzip.

Read the [sbmlTranslator documentation](#) for further information on sbmlTranslator’s limitations.

```
pysb.importers.sbml.sbml_translator(input_file, output_file=None, convention_file=None,
                                     naming_conventions=None, user_structures=None,
                                     molecule_id=False, atomize=False, pathway_commons=False,
                                     verbose=False)
```

Run the BioNetGen sbmlTranslator binary to convert SBML to BNGL

This function runs the external program sbmlTranslator, included with BioNetGen, which converts SBML files to BioNetGen language (BNGL). If PySB was installed using “conda”, you can install sbmlTranslator using

“conda install -c alubbock atomizer”. `sbmlTranslator` is bundled with BioNetGen if BNG is installed by manual download and unzip.

Generally, PySB users don’t need to run this function directly; an SBML model can be imported to PySB in a single step with `model_from_sbml()`. However, users may wish to note the parameters for this function, which alter the way the SBML file is processed. These parameters can be supplied as `**kwargs` to `model_from_sbml()`.

For more detailed descriptions of the arguments, see the [sbmlTranslator documentation](#).

Parameters

input_file

[string] SBML input filename

output_file

[string, optional] BNGL output filename

convention_file

[string, optional] Conventions filename

naming_conventions

[string, optional] Naming conventions filename

user_structures

[string, optional] User structures filename

molecule_id

[bool, optional] Use SBML molecule IDs (True) or names (False). IDs are less descriptive but more BNGL friendly. Use only if the generated BNGL has syntactic errors

atomize

[bool, optional] Atomize the model, i.e. attempt to infer molecular structure and build rules from the model (True) or just perform a flat import (False)

pathway_commons

[bool, optional] Use pathway commons to infer molecule binding. This setting requires an internet connection and will query the pathway commons web service.

verbose

[bool or int, optional (default: False)] Sets the verbosity level of the logger. See the logging levels and constants from Python’s logging module for interpretation of integer values. False leaves the logging verbosity unchanged, True is equal to DEBUG.

Returns

string

BNGL output filename

4.13 Exporting to other formats (`pysb.export`)

Tools for exporting PySB models to a variety of other formats.

Exporting can be performed at the command-line or programmatically/interactively from within Python.

4.13.1 Command-line usage

At the command-line, run as follows:

```
python -m pysb.export model.py <format>
```

where `model.py` is a file containing a PySB model definition (i.e., contains an instance of `pysb.core.Model` instantiated as a global variable). `[format]` should be the name of one of the supported formats:

- `bngl`
- `bng_net`
- `json`
- `kappa`
- `potterswheel`
- `sbml`
- `pysb_flat`
- `mathematica`
- `matlab`
- `stochkit`

In all cases, the exported model code will be printed to standard out, allowing it to be inspected or redirected to another file.

4.13.2 Interactive usage

Export functionality is implemented by this module’s top-level function `export`. For example, to export the “Robertson” example model as SBML, first import the model:

```
from pysb.examples.robertson import model
```

Then import the `export` function from this module:

```
from pysb.export import export
```

Call the `export` function, passing the model instance and a string indicating the desired format, which should be one of the ones indicated in the list in the “Command-line usage” section above:

```
sbml_output = export(model, 'sbml')
```

The output (a string) can be inspected or written to a file, e.g. as follows:

```
with open('robertson.sbml', 'w') as f:  
    f.write(sbml_output)
```


4.13.3 Implementation of specific exporters

Information on the implementation of specific exporters can be found in the documentation for the exporter classes in the package `pysb.export`:

Export SBML (`pysb.export.sbml`)

Module containing a class for exporting a PySB model to SBML using libSBML

For information on how to use the model exporters, see the documentation for `pysb.export`.

class `pysb.export.sbml.SbmlExporter(*args, **kwargs)`

A class for returning the SBML for a given PySB model.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

convert (*level*=(3, 2))

Convert the PySB model to a libSBML document

Requires the libsbml python package

Parameters

level: (int, int)

The SBML level and version to use. The default is SBML level 3, version 2. Conversion to other levels/versions may not be possible or may lose fidelity.

Returns

libsbml.SBMLDocument

A libSBML document converted from the PySB model

export (*level*=(3, 2))

Export the SBML for the PySB model associated with the exporter

Requires libsbml package.

Parameters

level: (int, int)

The SBML level and version to use. The default is SBML level 3, version 2. Conversion to other levels/versions may not be possible or may lose fidelity.

Returns

string

String containing the SBML output.

Export ODEs to MATLAB (`pysb.export.matlab`)

A class for converting a PySB model to a set of ordinary differential equations for integration in MATLAB.

Note that for use in MATLAB, the name of the `.m` file must match the name of the exported MATLAB class (e.g., `robertson.m` for the example below).

For information on how to use the model exporters, see the documentation for `pysb.export`.

Output for the Robertson example model

Information on the form and usage of the generated MATLAB class is contained in the documentation for the MATLAB model, as shown in the following example for `pysb.examples.robertson`:

```
classdef robertson
    % A simple three-species chemical kinetics system known as "Robertson's
    % example", as presented in:
    %
    % H. H. Robertson, The solution of a set of reaction rate equations, in Numerical
    % Analysis: An Introduction, J. Walsh, ed., Academic Press, 1966, pp. 178-182.
    %
    % A class implementing the ordinary differential equations
    % for the robertson model.
    %
    % Save as robertson.m.
    %
    % Generated by pysb.export.matlab.MatlabExporter.
    %
    % Properties
    % -----
    % observables : struct
    %     A struct containing the names of the observables from the
    %     PySB model as field names. Each field in the struct
    %     maps the observable name to a matrix with two rows:
    %     the first row specifies the indices of the species
    %     associated with the observable, and the second row
    %     specifies the coefficients associated with the species.
    %     For any given timecourse of model species resulting from
    %     integration, the timecourse for an observable can be
    %     retrieved using the get_observable method, described
    %     below.
    %
    % parameters : struct
    %     A struct containing the names of the parameters from the
    %     PySB model as field names. The nominal values are set by
    %     the constructor and their values can be overridden
    %     explicitly once an instance has been created.
    %
    % Methods
    % -----
    % robertson.odes(tspan, y0)
    %     The right-hand side function for the ODEs of the model,
    %     for use with MATLAB ODE solvers (see Examples).
    %
    % robertson.get_initial_values()
    %     Returns a vector of initial values for all species,
    %     specified in the order that they occur in the original
    %     PySB model (i.e., in the order found in model.species).
    %     Non-zero initial conditions are specified using the
    %     named parameters included as properties of the instance.
    %     Hence initial conditions other than the defaults can be
    %     used by assigning a value to the named parameter and then
```

(continues on next page)

(continued from previous page)

```

%    calling this method. The vector returned by the method
%    is used for integration by passing it to the MATLAB
%    solver as the y0 argument.
%
% robertson.get_observables(y)
%    Given a matrix of timecourses for all model species
%    (i.e., resulting from an integration of the model),
%    get the trajectories corresponding to the observables.
%    Timecourses are returned as a struct which can be
%    indexed by observable name.
%
% Examples
% -----
% Example integration using default initial and parameter
% values:
%
% >> m = robertson();
% >> tspan = [0 100];
% >> [t y] = ode15s(@m.odes, tspan, m.get_initial_values());
%
% Retrieving the observables:
%
% >> y_obs = m.get_observables(y)
%
properties
    observables
    parameters
end

methods
function self = robertson()
    % Assign default parameter values
    self.parameters = struct( ...
        'k1', 0.040000000000000001, ...
        'k2', 300000000, ...
        'k3', 10000, ...
        'A_0', 1, ...
        'B_0', 0, ...
        'C_0', 0);

    % Define species indices (first row) and coefficients
    % (second row) of named observables
    self.observables = struct( ...
        'A_total', [1; 1], ...
        'B_total', [2; 1], ...
        'C_total', [3; 1]);
end

function initial_values = get_initial_values(self)
    % Return the vector of initial conditions for all
    % species based on the values of the parameters
    % as currently defined in the instance.

```

(continues on next page)

(continued from previous page)

```

        initial_values = zeros(1,3);
        initial_values(1) = self.parameters.A_0; % A()
        initial_values(2) = self.parameters.B_0; % B()
        initial_values(3) = self.parameters.C_0; % C()
    end

    function y = odes(self, tspan, y0)
        % Right hand side function for the ODEs

        % Shorthand for the struct of model parameters
        p = self.parameters;

        % A();
        y(1,1) = -p.k1*y0(1) + p.k3*y0(2)*y0(3);
        % B();
        y(2,1) = p.k1*y0(1) - p.k2*power(y0(2), 2) - p.k3*y0(2)*y0(3);
        % C();
        y(3,1) = p.k2*power(y0(2), 2);
    end

    function y_obs = get_observables(self, y)
        % Retrieve the trajectories for the model observables
        % from a matrix of the trajectories of all model
        % species.

        % Initialize the struct of observable timecourses
        % that we will return
        y_obs = struct();

        % Iterate over the observables;
        observable_names = fieldnames(self.observables);
        for i = 1:numel(observable_names)
            obs_matrix = self.observables.(observable_names{i});
            if isempty(obs_matrix)
                y_obs.(observable_names{i}) = zeros(size(y, 1), 1);
                continue
            end
            species = obs_matrix(1, :);
            coefficients = obs_matrix(2, :);
            y_obs.(observable_names{i}) = ...
                y(:, species) * coefficients';
        end
    end
end
end
end

```

class `pysb.export.matlab.MatlabExporter`(*model*, *docstring=None*)

A class for returning the ODEs for a given PySB model for use in MATLAB.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export()

Generate a MATLAB class definition containing the ODEs for the PySB model associated with the exporter.

Returns

string

String containing the MATLAB code for an implementation of the model's ODEs.

Export ODEs to Mathematica (`pysb.export.mathematica`)

Module containing a class for converting a PySB model to a set of ordinary differential equations for integration or analysis in Mathematica.

For information on how to use the model exporters, see the documentation for `pysb.export`.

Output for the Robertson example model

The Mathematica code produced will follow the form as given below for `pysb.examples.robertson`:

```
(*
A simple three-species chemical kinetics system known as "Robertson's
example", as presented in:

H. H. Robertson, The solution of a set of reaction rate equations, in Numerical
Analysis: An Introduction, J. Walsh, ed., Academic Press, 1966, pp. 178-182.

Mathematica model definition file for model robertson.
Generated by pysb.export.mathematica.MathematicaExporter.

Run with (for example):
tmax = 10
soln = NDSolve[Join[odes, initconds], slist, {t, 0, tmax}]
Plot[s0[t] /. soln, {t, 0, tmax}, PlotRange -> All]
*)

(* Parameters *)
k1 = 0.040000000000000001;
k2 = 30000000;
k3 = 10000;
A0 = 1;
B0 = 0;
C0 = 0;

(* List of Species *)
(* s0[t] = A() *)
(* s1[t] = B() *)
(* s2[t] = C() *)

(* ODEs *)
odes = {
s0'[t] == -k1*s0[t] + k3*s1[t]*s2[t],
s1'[t] == k1*s0[t] - k2*s1[t]^2 - k3*s1[t]*s2[t],
s2'[t] == k2*s1[t]^2
```

(continues on next page)

(continued from previous page)

```

}

(* Initial Conditions *)
initconds = {
s0[0] == A0,
s1[0] == B0,
s2[0] == C0
}

(* List of Variables (e.g., as an argument to NDSolve) *)
solvelist = {
s0[t],
s1[t],
s2[t]
}

(* Run the simulation -- example *)
tmax = 100
soln = NDSolve[Join[odes, initconds], solvelist, {t, 0, tmax}]

(* Observables *)
Atotal = (s0[t] * 1) /. soln
Btotal = (s1[t] * 1) /. soln
Ctotal = (s2[t] * 1) /. soln

```

The output consists of a block of commands that define the ODEs, parameters, species and other variables for the model, along with a set of descriptive comments. The sections are as follows:

- The header comments identify the model and show an example of how to integrate the ODEs in Mathematica.
- The parameters block defines the numerical values of the named parameters.
- The list of species gives the mapping between the indexed species (`s0`, `s1`, `s2`) and their representation in PySB (`A()`, `B()`, `C()`).
- The ODEs block defines the set of ordinary differential equations and assigns the set of equations to the variable `odes`.
- The initial conditions block defines the initial values for each species and assigns the set of conditions to the variable `initconds`.
- The “list of variables” block enumerates all of the species in the model (`s0[t]`, `s1[t]`, `s2[t]`) and assigns them to the variable `solvelist`; this list can be passed to the Mathematica command `NDSolve` to indicate the variables to be solved for.
- This is followed by an example of how to call `NDSolve` to integrate the equations.
- Finally, the observables block enumerates the observables in the model, expressing each one as a linear combination of the appropriate species in the model. The interpolating functions returned by `NDSolve` are substituted in from the solution variable `soln`, allowing the observables to be plotted.

Note that Mathematica does not permit underscores in variable names, so any underscores used in PySB variables will be removed (e.g., `A_total` will be converted to `Atotal`).

class `pysb.export.mathematica.MathematicaExporter`(*model*, *docstring=None*)

A class for returning the ODEs for a given PySB model for use in Mathematica.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export()

Generate the corresponding Mathematica ODEs for the PySB model associated with the exporter.

Returns**string**

String containing the Mathematica code for the model's ODEs.

Export ODEs to PottersWheel (`pysb.export.potterswheel`)

Module containing a class for converting a PySB model to an equivalent set of ordinary differential equations for integration or analysis in `PottersWheel`.

For information on how to use the model exporters, see the documentation for `pysb.export`.

Output for the Robertson example model

The PottersWheel code produced will follow the form as given below for `pysb.examples.robertson`:

```
% A simple three-species chemical kinetics system known as "Robertson's
% example", as presented in:
%
% H. H. Robertson, The solution of a set of reaction rate equations, in Numerical
% Analysis: An Introduction, J. Walsh, ed., Academic Press, 1966, pp. 178-182.
%
% PottersWheel model definition file
% save as robertson.m
function m = robertson()

m = pwGetEmptyModel();

% meta information
m.ID          = 'robertson';
m.name        = 'robertson';
m.description = '';
m.authors     = {' '};
m.dates       = {' '};
m.type        = 'PW-1-5';

% dynamic variables
m = pwAddX(m, 's0', 1.000000e+00);
m = pwAddX(m, 's1', 0.000000e+00);
m = pwAddX(m, 's2', 0.000000e+00);

% dynamic parameters
m = pwAddK(m, 'k1', 4.000000e-02);
m = pwAddK(m, 'k2', 3.000000e+07);
m = pwAddK(m, 'k3', 1.000000e+04);
m = pwAddK(m, 'A_0', 1.000000e+00);
m = pwAddK(m, 'B_0', 0.000000e+00);
m = pwAddK(m, 'C_0', 0.000000e+00);

% ODEs
```

(continues on next page)

(continued from previous page)

```
m = pwAddODE(m, 's0', '-k1*s0 + k3*s1*s2');
m = pwAddODE(m, 's1', 'k1*s0 - k2*power(s1, 2) - k3*s1*s2');
m = pwAddODE(m, 's2', 'k2*power(s1, 2)');

% observables
m = pwAddY(m, 'A_total', '1.000000 * s0');
m = pwAddY(m, 'B_total', '1.000000 * s1');
m = pwAddY(m, 'C_total', '1.000000 * s2');

% end of PottersWheel model robertson
```

class `pysb.export.potterswheel.PottersWheelExporter(model, docstring=None)`

A class for returning the PottersWheel equivalent for a given PySB model.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export()

Generate the PottersWheel code for the ODEs of the PySB model associated with the exporter.

Returns

string

String containing the PottersWheel code for the ODEs.

Export BNGL (`pysb.export.bngl`)

Module containing a class for exporting a PySB model to BNGL.

Serves as a wrapper around `pysb.generator.bng.BngGenerator`.

For information on how to use the model exporters, see the documentation for `pysb.export`.

class `pysb.export.bngl.BnglExporter(model, docstring=None)`

A class for returning the BNGL for a given PySB model.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export()

Generate the corresponding BNGL for the PySB model associated with the exporter. A wrapper around `pysb.generator.bng.BngGenerator`.

Returns

string

The BNGL output for the model.

Export BNGL NET file (`pysb.export.bng_net`)

Module containing a class for getting the BNGL NET file for a given PySB model.

Serves as a wrapper around `pysb.bng.generate_network()`, which generates the BNGL for the model and then invokes BNG to generate the NET file.

For information on how to use the model exporters, see the documentation for `pysb.export`.

class `pysb.export.bng_net.BngNetExporter(model, docstring=None)`

A class for generating the BNG NET file for a given PySB model.

Inherits from `pysb.export.Export`, which implements basic functionality for all exporters.

export()

Generate the BNGL NET file for the PySB model associated with the exporter. A wrapper around `pysb.bng.generate_network()`.

Returns

string

The NET file output for the model, generated by BNG.

Export Kappa (`pysb.export.kappa`)

Module containing a class for returning the Kappa equivalent for a given PySB model.

Serves as a wrapper around `pysb.generator.kappa.KappaGenerator`.

For information on how to use the model exporters, see the documentation for `pysb.export`.

class `pysb.export.kappa.KappaExporter(model, docstring=None)`

A class for returning the Kappa for a given PySB model.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export(dialect='kasim')

Generate the corresponding Kappa for the PySB model associated with the exporter. A wrapper around `pysb.generator.kappa.KappaGenerator`.

Parameters

dialect

[(optional) string, either 'kasim' (default) or 'complx'] The Kappa file syntax for the Kasim simulator is slightly different from that of the complx analyzer. This argument specifies which type of Kappa to produce ('kasim' is the default).

Returns

string

The Kappa output.

Export a “flat” PySB model (`pysb.export.pysb_flat`)

A module containing a class that exports a PySB model to a single Python source file that, when imported, will recreate the same model. This is intended for saving a dynamically generated model so that it can be reused without re-running the dynamic generation process. Note that any macro calls and other program structure in the original model are “flattened” in the process.

For information on how to use the model exporters, see the documentation for `pysb.export`.

Structure of the Python code

The standalone Python code calls `Model()`, then defines Monomers, Parameters, Expressions (constant), Compartments, Observables, Expressions (dynamic), Rules and initial conditions in that order. This can be considered a sort of “repr()” for a full model.

If the output is saved as `foo.py` then one may load the model with the following line:

```
from foo import model
```

class `pysb.export.pysb_flat.PysbFlatExporter(model, docstring=None)`

A class for generating PySB “flat” model source code from a model.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export()

Export PySB source code from a model.

Returns

string

String containing the Python code.

Export to StochKit (`pysb.export.stochkit`)

Module containing a class to return the StochKit XML equivalent of a model

Contains code based on the *gillespy* <<https://github.com/JohnAbel/gillespy>> library with permission from author Brian Drawert.

For information on how to use the model exporters, see the documentation for `pysb.export`.

class `pysb.export.stochkit.StochKitExporter(model, docstring=None)`

A class for returning the Kappa for a given PySB model.

Inherits from `pysb.export.Exporter`, which implements basic functionality for all exporters.

export(initials=None, param_values=None)

Generate the corresponding StochKit2 XML for a PySB model

Parameters

initials

[list of numbers] List of initial species concentrations overrides (must be same length as `model.species`). If None, the concentrations from the model are used.

param_values

[list] List of parameter value overrides (must be same length as `model.parameters`). If None, the parameter values from the model are used.

Returns

string

The model in StochKit2 XML format

Export JSON (`pysb.export.json`)

Module containing a class for exporting a PySB model to JSON

For information on how to use the model exporters, see the documentation for [pysb.export](#).

class `pysb.export.json.JsonExporter`(*model*, *docstring=None*)

A class for returning the JSON for a given PySB model.

Inherits from [pysb.export.Exporter](#), which implements basic functionality for all exporters.

export(*include_netgen=False*)

Generate the corresponding JSON for the PySB model associated with the exporter.

Parameters

include_netgen: bool

Include cached network generation data (reactions, species, local function-derived parameters and expressions) if True.

Returns

string

The JSON output for the model.

class `pysb.export.json.PySBJSONEncoder`(***, *skipkeys=False*, *ensure_ascii=True*, *check_circular=True*, *allow_nan=True*, *sort_keys=False*, *indent=None*, *separators=None*, *default=None*)

Encode a PySB model in JSON

This encoder stores the model without caching the reaction network. To also store the reaction network, see [PySBJSONWithNetworkEncoder](#).

Attributes correspond to their PySB equivalents (monomers, parameters, etc.) and are mostly stored verbatim, with the following exceptions.

- MultiStates and the ANY and WILD state values use a special object format
- References to other components are stored using the component name
- SymPy expressions are encoded as strings using the default encoder

The protocol number specifies semantic compatibility of the JSON output. It should be incremented if new features are added which affect how a model is simulated or prevent the new output from being loaded by `pysb.importers.json.PySBJSONDecoder()`. See that code for documentation on the different protocol versions. This encoder only produces JSON using the highest protocol currently defined; If you need to generate output for an older protocol, use an older version of PySB in which the desired protocol number was still current.

default(*o*)

Implement this method in a subclass such that it returns a serializable object for *o*, or calls the base implementation (to raise a `TypeError`).

For example, to support arbitrary iterators, you could implement default like this:

```
def default(self, o):
    try:
        iterable = iter(o)
    except TypeError:
        pass
    else:
        return list(iterable)
```

(continues on next page)

(continued from previous page)

```
# Let the base class default method raise the TypeError
return JSONEncoder.default(self, o)
```

```
class pysb.export.json.PySBJSONWithNetworkEncoder(*, skipkeys=False, ensure_ascii=True,
                                                    check_circular=True, allow_nan=True,
                                                    sort_keys=False, indent=None, separators=None,
                                                    default=None)
```

Encode a PySB model and its reaction network in JSON

This encoder stores the model including the cached reaction network. To encode the model without the reaction network, see [PySBJSONEncoder](#), which also includes implementation details.

exception `pysb.export.CompartmentsNotSupported`

Compartments are not supported by this exporter

exception `pysb.export.CustomSymPyFunctionsNotSupported`

Custom sympy functions are not supported by this exporter

exception `pysb.export.EnergyNotSupported`

Energy features are not supported by this exporter

exception `pysb.export.ExportError`

class `pysb.export.Exporter(model, docstring=None)`

Base class for all PySB model exporters.

Export functionality is implemented by subclasses of this class. The pattern for model export is the same for all exporter subclasses: a model is passed to the exporter constructor and the `export` method on the instance is called.

Parameters

model

[`pysb.core.Model`] The model to export.

docstring

[string (optional)] The header comment to include at the top of the exported file.

Examples

Exporting the “Robertson” example model to SBML using the `SbmlExporter` subclass:

```
>>> from pysb.examples.robertson import model
>>> from pysb.export.sbml import SbmlExporter
>>> e = SbmlExporter(model)
>>> sbml_output = e.export()
```

docstring

Header comment to include at the top of the exported file.

export()

The export method, which must be implemented by any subclass.

All implementations of this method are expected to return a single string containing the representation of the model in the desired format.

model

The model to export.

exception `pysb.export.ExpressionsNotSupported`

Expressions are not supported by this exporter

exception `pysb.export.FeatureNotSupportedError`

exception `pysb.export.LocalFunctionsNotSupported`

Local functions are not supported by this exporter

`pysb.export.export(model, format, docstring=None)`

Top-level function for exporting a model to a given format.

Parameters

model

[`pysb.core.Model`] The model to export.

format

[string] A string indicating the desired export format.

docstring

[string (optional)] The header comment to include at the top of the exported file.

`pysb.export.pad(text, depth=0)`

Dedent multi-line string and pad with spaces.

USEFUL REFERENCES

A collection of links for learning more about Python and other tools used by PySB.

5.1 Python Language

For those unfamiliar with Python or programming there are several resources available online. We have found the ones below useful to learn Python in a practical and straightforward manner.

Quick Python Overview:

- [Instant Python](#)

Python tutorials for beginners, experienced users, or if you want a refresher:

- [Official Python tutorial](#)
- [Python for non-programmers](#)
- [Dive into Python](#)
- [Thinking in Python](#)

5.2 NumPy and SciPy

NumPy:

- [NumPy for Matlab](#)
- Also the [Mathesaurus](#)
- Matlab commands in Numerical Python [cheatsheet](#)

SciPy:

- [Scientific Python](#)

5.3 BioNetGen

- [BioNetGen tutorial](#)
- [Compartmental BNGL](#)

INDICES AND TABLES

- `genindex`
- `modindex`
- `search`

PYTHON MODULE INDEX

p

- `pysb.bng`, 66
- `pysb.core`, 29
- `pysb.export`, 115
 - `pysb.export.bng_net`, 124
 - `pysb.export.bngl`, 124
 - `pysb.export.json`, 127
 - `pysb.export.kappa`, 125
 - `pysb.export.mathematica`, 121
 - `pysb.export.matlab`, 117
 - `pysb.export.potterswheel`, 123
 - `pysb.export.pysb_flat`, 125
 - `pysb.export.sbml`, 117
 - `pysb.export.stochkit`, 126
- `pysb.importers.bngl`, 112
- `pysb.importers.sbml`, 113
- `pysb.integrate`, 44
- `pysb.kappa`, 70
- `pysb.macros`, 74
- `pysb.pathfinder`, 63
- `pysb.pattern`, 97
- `pysb.simulator`, 47
- `pysb.testing.modeltests`, 64
- `pysb.tools.render_reactions`, 105
- `pysb.tools.render_species`, 106
- `pysb.tools.sensitivity_analysis`, 107

A

action() (*pysb.bng.BngBaseInterface* method), 66
 action() (*pysb.bng.BngConsole* method), 67
 action() (*pysb.bng.BngFileInterface* method), 67
 add_annotation() (*pysb.core.Model* method), 36
 add_component() (*pysb.core.Model* method), 36
 add_initial() (*pysb.core.SelfExporter* static method), 43
 add_species() (*pysb.pattern.SpeciesPatternMatcher* method), 101
 all (*pysb.simulator.SimulationResult* property), 58
 all_component_sets() (*pysb.core.Model* method), 36
 all_components() (*pysb.core.Model* method), 36
 AllObservablesInRules (class in *pysb.testing.modeltests*), 64
 ANY (class in *pysb.core*), 29
 as_complex_pattern() (in module *pysb.core*), 43
 as_reaction_pattern() (in module *pysb.core*), 43
 assemble_chain_sequential_base() (in module *pysb.macros*), 74
 assemble_pore_sequential() (in module *pysb.macros*), 75

B

base_filename (*pysb.bng.BngBaseInterface* property), 66
 bind() (in module *pysb.macros*), 77
 bind_complex() (in module *pysb.macros*), 77
 bind_table() (in module *pysb.macros*), 79
 bind_table_complex() (in module *pysb.macros*), 81
 bng_filename (*pysb.bng.BngBaseInterface* property), 66
 BngBaseInterface (class in *pysb.bng*), 66
 BngConsole (class in *pysb.bng*), 67
 BngFileInterface (class in *pysb.bng*), 67
 BngInterfaceError, 68
 BngIExporter (class in *pysb.export.bngI*), 124
 BngNetExporter (class in *pysb.export.bng_net*), 124
 BngSimulator (class in *pysb.simulator*), 47
 build_rule_expression() (in module *pysb.core*), 43

C

cartesian_product() (in module *pysb.tools.sensitivity_analysis*), 112
 catalyze() (in module *pysb.macros*), 83
 catalyze_complex() (in module *pysb.macros*), 85
 catalyze_one_step() (in module *pysb.macros*), 85
 catalyze_one_step_reversible() (in module *pysb.macros*), 86
 catalyze_state() (in module *pysb.macros*), 87
 check() (*pysb.testing.modeltests.TestSuite* method), 65
 check_all() (*pysb.testing.modeltests.TestSuite* method), 66
 check_dangling_bonds() (in module *pysb.pattern*), 103
 cleanup() (*pysb.core.SelfExporter* static method), 43
 Compartment (class in *pysb.core*), 29
 CompartmentAlreadySpecifiedError, 30
 CompartmentsNotSupported, 128
 ComplexPattern (class in *pysb.core*), 30
 Component (class in *pysb.core*), 30
 ComponentDuplicateNameError, 31
 ComponentSet (class in *pysb.core*), 31
 ConstantExpressionError, 33
 contact_map (*pysb.kappa.StaticAnalysisResult* attribute), 70
 contact_map() (in module *pysb.kappa*), 70
 convert() (*pysb.export.sbml.SbmlExporter* method), 117
 copy() (*pysb.core.ComplexPattern* method), 30
 create_boxplot_and_heatplot() (*pysb.tools.sensitivity_analysis.PairwiseSensitivity* method), 111
 create_individual_pairwise_plots() (*pysb.tools.sensitivity_analysis.PairwiseSensitivity* method), 111
 create_plot_p_h_pprime() (*pysb.tools.sensitivity_analysis.PairwiseSensitivity* method), 111
 CudaSSASimulator (class in *pysb.simulator*), 48
 CupSodaSimulator (class in *pysb.simulator*), 49
 CustomSymPyFunctionsNotSupported, 128

D

DanglingBondError, 33
dataframe (*pysb.simulator.SimulationResult* property), 58
default() (*pysb.export.json.PySBJSONEncoder* method), 127
degrade() (*in module pysb.macros*), 89
docstring (*pysb.export.Exporter* attribute), 128
drug_binding() (*in module pysb.macros*), 90
DuplicateMonomerError, 33
DuplicateSiteError, 33

E

enable_synth_deg() (*pysb.core.Model* method), 36
EnergyNotSupported, 128
EnergyPattern (*class in pysb.core*), 33
equilibrate() (*in module pysb.macros*), 91
execute() (*pysb.bng.BngFileInterface* method), 67
expand_expr() (*pysb.core.Expression* method), 34
expand_obs() (*pysb.core.Observable* method), 40
export() (*in module pysb.export*), 129
export() (*pysb.core.SelfExporter* static method), 43
export() (*pysb.export.bng_net.BngNetExporter* method), 125
export() (*pysb.export.bngl.BnglExporter* method), 124
export() (*pysb.export.Exporter* method), 128
export() (*pysb.export.json.JsonExporter* method), 127
export() (*pysb.export.kappa.KappaExporter* method), 125
export() (*pysb.export.mathematica.MathematicaExporter* method), 122
export() (*pysb.export.matlab.MatlabExporter* method), 120
export() (*pysb.export.potterswheel.PottersWheelExporter* method), 124
export() (*pysb.export.pysb_flat.PysbFlatExporter* method), 126
export() (*pysb.export.sbml.SbmlExporter* method), 117
export() (*pysb.export.stochkit.StochKitExporter* method), 126
Exporter (*class in pysb.export*), 128
ExportError, 128
Expression (*class in pysb.core*), 33
ExpressionError, 34
expressions (*pysb.simulator.SimulationResult* property), 58
expressions_constant() (*pysb.core.Model* method), 36
expressions_dynamic() (*pysb.core.Model* method), 36
ExpressionsNotSupported, 129
extract_site_conditions() (*in module pysb.core*), 43

F

FeatureNotSupportedError, 129
filter() (*pysb.core.ComponentSet* method), 31
FilterPredicate (*class in pysb.pattern*), 97
flux_map (*pysb.kappa.SimulationResult* attribute), 70
Function (*class in pysb.pattern*), 97

G

generate_equations() (*in module pysb.bng*), 68
generate_network() (*in module pysb.bng*), 68
generate_network() (*pysb.bng.BngConsole* method), 67
get() (*pysb.core.ComponentSet* method), 33
get_annotations() (*pysb.core.Model* method), 36
get_bonds_in_pattern() (*in module pysb.pattern*), 103
get_half_bonds_in_pattern() (*in module pysb.pattern*), 104
get_path() (*in module pysb.pathfinder*), 63
get_species_index() (*pysb.core.Model* method), 36

H

has_synth_deg() (*pysb.core.Model* method), 36

I

index() (*pysb.core.ComponentSet* method), 33
influence_map (*pysb.kappa.StaticAnalysisResult* attribute), 70
influence_map() (*in module pysb.kappa*), 71
Initial (*class in pysb.core*), 34
initial() (*pysb.core.Model* method), 36
InitialConditionsView (*class in pysb.core*), 34
InitialsSensitivity (*class in pysb.tools.sensitivity_analysis*), 107
InvalidComplexPatternException, 34
InvalidComponentNameError, 34
InvalidInitialConditionError, 34
InvalidReactionPatternException, 34
InvalidReversibleSynthesisDegradationRule, 34
is_concrete() (*pysb.core.ComplexPattern* method), 30
is_concrete() (*pysb.core.MonomerPattern* method), 39
is_constant_expression() (*pysb.core.Expression* method), 34
is_deg() (*pysb.core.Rule* method), 42
is_equivalent_to() (*pysb.core.ComplexPattern* method), 30
is_site_concrete() (*pysb.core.MonomerPattern* method), 39
is_state_bond_tuple() (*in module pysb.core*), 43
is_synth() (*pysb.core.Rule* method), 42
items() (*pysb.core.ComponentSet* method), 33

J

JsonExporter (class in *pysb.export.json*), 127

K

KappaExporter (class in *pysb.export.kappa*), 125

KappaSimulator (class in *pysb.simulator*), 52

KasaInterfaceError, 70

KasimInterfaceError, 70

keys() (*pysb.core.ComponentSet* method), 33

L

list_programs() (in module *pysb.pathfinder*), 63

load() (*pysb.simulator.SimulationResult* class method), 58

load_bngl() (*pysb.bng.BngConsole* method), 67

load_equations() (in module *pysb.bng*), 69

LocalFunctionsNotSupported, 129

M

match() (*pysb.pattern.SpeciesPatternMatcher* method), 101

match_complex_pattern() (in module *pysb.pattern*), 104

match_reaction_pattern() (in module *pysb.pattern*), 104

matches() (*pysb.core.ComplexPattern* method), 30

matches() (*pysb.core.ReactionPattern* method), 41

MatchOnce() (in module *pysb.core*), 34

MathematicaExporter (class in *pysb.export.mathematica*), 122

MatlabExporter (class in *pysb.export.matlab*), 120

Model (class in *pysb.core*), 35

model (*pysb.export.Exporter* attribute), 128

model_from_biomodels() (in module *pysb.importers.sbml*), 113

model_from_bngl() (in module *pysb.importers.bngl*), 112

model_from_sbml() (in module *pysb.importers.sbml*), 114

ModelAssertion (class in *pysb.testing.modeltests*), 64

ModelAssertionFailure, 64

ModelExistsWarning, 38

ModelNotDefinedError, 38

module

pysb.bng, 66

pysb.core, 29

pysb.export, 115

pysb.export.bng_net, 124

pysb.export.bngl, 124

pysb.export.json, 127

pysb.export.kappa, 125

pysb.export.mathematica, 121

pysb.export.matlab, 117

pysb.export.potterswheel, 123

pysb.export.pysb_flat, 125

pysb.export.sbml, 117

pysb.export.stochkit, 126

pysb.importers.bngl, 112

pysb.importers.sbml, 113

pysb.integrate, 44

pysb.kappa, 70

pysb.macros, 74

pysb.pathfinder, 63

pysb.pattern, 97

pysb.simulator, 47

pysb.testing.modeltests, 64

pysb.tools.render_reactions, 105

pysb.tools.render_species, 106

pysb.tools.sensitivity_analysis, 107

Module (class in *pysb.pattern*), 97

modules (*pysb.core.Model* property), 36

Monomer (class in *pysb.core*), 38

MonomerPattern (class in *pysb.core*), 38

monomers_from_pattern() (in module *pysb.pattern*), 105

MultiState (class in *pysb.core*), 39

N

Name (class in *pysb.pattern*), 97

net_filename (*pysb.bng.BngBaseInterface* property), 66

NoInitialConditionsError, 68

NoRulesError, 68

nsims (*pysb.simulator.SimulationResult* property), 59

O

Observable (class in *pysb.core*), 40

observable() (*pysb.simulator.SimulationResult* method), 59

observables (*pysb.simulator.SimulationResult* property), 60

odes (*pysb.core.Model* property), 37

odesolve() (in module *pysb.integrate*), 45

OdeView (class in *pysb.core*), 41

OpenCLSSASimulator (class in *pysb.simulator*), 53

P

pad() (in module *pysb.export*), 129

PairwiseSensitivity (class in *pysb.tools.sensitivity_analysis*), 107

Parameter (class in *pysb.core*), 41

parameters_all() (*pysb.core.Model* method), 37

parameters_compartments() (*pysb.core.Model* method), 37

parameters_expressions() (*pysb.core.Model* method), 37

`parameters_initial_conditions()`
 (*pysb.core.Model* method), 37
`parameters_rules()` (*pysb.core.Model* method), 37
`parameters_unused()` (*pysb.core.Model* method), 37
`parse_bngl_expr()` (*in module pysb.bng*), 69
`Pattern` (*class in pysb.pattern*), 97
`PopulationMap` (*class in pysb.simulator*), 54
`pore_bind()` (*in module pysb.macros*), 92
`pore_transport()` (*in module pysb.macros*), 93
`PottersWheelExporter` (*class*
 pysb.export.potterswheel), 124
`pysb.bng`
 module, 66
`pysb.core`
 module, 29
`pysb.export`
 module, 115
`pysb.export.bng_net`
 module, 124
`pysb.export.bngl`
 module, 124
`pysb.export.json`
 module, 127
`pysb.export.kappa`
 module, 125
`pysb.export.mathematica`
 module, 121
`pysb.export.matlab`
 module, 117
`pysb.export.potterswheel`
 module, 123
`pysb.export.pysb_flat`
 module, 125
`pysb.export.sbml`
 module, 117
`pysb.export.stochkit`
 module, 126
`pysb.importers.bngl`
 module, 112
`pysb.importers.sbml`
 module, 113
`pysb.integrate`
 module, 44
`pysb.kappa`
 module, 70
`pysb.macros`
 module, 74
`pysb.pathfinder`
 module, 63
`pysb.pattern`
 module, 97
`pysb.simulator`
 module, 47
`pysb.testing.modeltests`

 module, 64
`pysb.tools.render_reactions`
 module, 105
`pysb.tools.render_species`
 module, 106
`pysb.tools.sensitivity_analysis`
 module, 107
`PysbFlatExporter` (*class in pysb.export.pysb_flat*), 126
`PySBJSONEncoder` (*class in pysb.export.json*), 127
`PySBJSONWithNetworkEncoder` (*class* *in*
 pysb.export.json), 128

R

`ReactionAssertion` (*class in pysb.testing.modeltests*),
 64
`ReactionNetworkAssertion` (*class* *in*
 pysb.testing.modeltests), 64
`ReactionPattern` (*class in pysb.core*), 41
`ReactionPatternMatcher` (*class in pysb.pattern*), 97
`read_netfile()` (*pysb.bng.BngBaseInterface* method),
 66
`read_simulation_results()`
 (*pysb.bng.BngBaseInterface* method), 66
`read_simulation_results_multi()`
 (*pysb.bng.BngBaseInterface* static method), 66
`RedundantSiteConditionsError`, 41
`reload()` (*pysb.core.Model* method), 37
`rename()` (*pysb.core.Component* method), 31
`rename()` (*pysb.core.ComponentSet* method), 33
`rename()` (*pysb.core.SelfExporter* static method), 43
`reset_equations()` (*pysb.core.Model* method), 37
`ReusedBondError`, 41
`Rule` (*class in pysb.core*), 41
`rule_firing_species()`
 (*pysb.pattern.SpeciesPatternMatcher* method),
 102
`RuleAssertion` (*class in pysb.testing.modeltests*), 64
`RuleExpression` (*class in pysb.core*), 42
`RulePatternMatcher` (*class in pysb.pattern*), 99
`rules_energy()` (*pysb.core.Model* method), 37
`run()` (*in module pysb.tools.render_reactions*), 106
`run()` (*in module pysb.tools.render_species*), 107
`run()` (*pysb.integrate.Solver* method), 45
`run()` (*pysb.simulator.BngSimulator* method), 47
`run()` (*pysb.simulator.CudaSSASimulator* method), 49
`run()` (*pysb.simulator.CupSodaSimulator* method), 51
`run()` (*pysb.simulator.KappaSimulator* method), 52
`run()` (*pysb.simulator.OpenCLSSASimulator* method),
 54
`run()` (*pysb.simulator.ScipyOdeSimulator* method), 56
`run()` (*pysb.simulator.StochKitSimulator* method), 62
`run()` (*pysb.tools.sensitivity_analysis.PairwiseSensitivity*
 method), 112
`run_simulation()` (*in module pysb.kappa*), 71

`run_ssa()` (in module `pysb.bng`), 69

`run_static_analysis()` (in module `pysb.kappa`), 72

S

`save()` (`pysb.simulator.SimulationResult` method), 60

`sbml_translator()` (in module `pysb.importers.sbml`), 114

`SbmlExporter` (class in `pysb.export.sbml`), 117

`ScipyOdeSimulator` (class in `pysb.simulator`), 54

`SelfExporter` (class in `pysb.core`), 43

`sensitivity_multiset`
(`pysb.tools.sensitivity_analysis.PairwiseSensitivity`
property), 112

`set_bng_path()` (in module `pysb.bng`), 70

`set_concentration()` (`pysb.bng.BngFileInterface`
method), 68

`set_kappa_path()` (in module `pysb.kappa`), 73

`set_parameter()` (`pysb.bng.BngFileInterface` method), 68

`set_path()` (in module `pysb.pathfinder`), 63

`SimulationResult` (class in `pysb.kappa`), 70

`SimulationResult` (class in `pysb.simulator`), 56

`Solver` (class in `pysb.integrate`), 44

`species` (`pysb.simulator.SimulationResult` property), 60

`species_fired_by_reactant_pattern()`
(`pysb.pattern.SpeciesPatternMatcher` method), 102

`SpeciesAssertion` (class in `pysb.testing.modeltests`), 64

`SpeciesDoesNotExist` (class in
`pysb.testing.modeltests`), 64

`SpeciesExists` (class in `pysb.testing.modeltests`), 64

`SpeciesIsProduct` (class in `pysb.testing.modeltests`), 64

`SpeciesIsReactant` (class in `pysb.testing.modeltests`), 64

`SpeciesNeverProduct` (class in
`pysb.testing.modeltests`), 64

`SpeciesNeverReactant` (class in
`pysb.testing.modeltests`), 64

`SpeciesOnlyProduct` (class in `pysb.testing.modeltests`), 64

`SpeciesOnlyReactant` (class in
`pysb.testing.modeltests`), 64

`SpeciesPatternMatcher` (class in `pysb.pattern`), 100

`StaticAnalysisResult` (class in `pysb.kappa`), 70

`StochKitExporter` (class in `pysb.export.stochkit`), 126

`StochKitSimulator` (class in `pysb.simulator`), 60

`stoichiometry_matrix` (`pysb.core.Model` property), 37

`SymbolExistsWarning`, 43

`synthesize()` (in module `pysb.macros`), 95

`synthesize_degrade_table()` (in module
`pysb.macros`), 96

T

`Tag` (class in `pysb.core`), 43

`TagAlreadySpecifiedError`, 43

`TestSuite` (class in `pysb.testing.modeltests`), 64

`timecourse` (`pysb.kappa.SimulationResult` attribute), 70

U

`UnknownSiteError`, 43

`update_initial_condition_pattern()`
(`pysb.core.Model` method), 37

`uses_energy` (`pysb.core.Model` property), 38

V

`validate_const_expr()` (in module `pysb.core`), 43

`validate_expr()` (in module `pysb.core`), 43

`values()` (`pysb.core.ComponentSet` method), 33

W

`WILD` (class in `pysb.core`), 43